

PE7324r

eco PDU



As part of its NRGence line, ATEN has developed a new generation of green energy power distribution units (eco [PDU](#)s) to effectively increase the efficiency of [data center](#) power usage. The NRGence PE7234r eco [PDU](#)s are intelligent [PDU](#)s that contain 24 AC outlets and are available in various IEC or NEMA socket configurations.

NRGence eco [PDU](#)s provide secure, centralized, intelligent, power management (power on, off, cycle) of [data center](#) IT equipment (servers, storage systems, KVM switches, network devices, serial data devices, etc.), as well as the ability to monitor the center's health environment via sensors *.

NRGence eco [PDU](#)s offer [remote power control](#) combined with real-time power measurement – allowing you to control and monitor the power status of devices attached to the [PDU](#)s, either at the [PDU](#) device, bank, or outlet level, depending on the model, from practically any location via a TCP/IP connection **.

The eco [PDU](#) also offers comprehensive power analysis reports which can separate departments and locations, providing precise measurements of current, voltage, power and watt-hour in a real-time display.

In order to manage more outlets from the same single session, the eco [PDU](#) also provides daisy chain functionality; up to 5 additional units can be daisy chained. Installation and operation is fast and easy: plugging cables into their appropriate ports and user-friendly browser-based configuration and management is all that is entailed. Since the eco [PDU](#) firmware is upgradeable over the Net, you can stay current with the latest functionality improvements simply by downloading updates from our website as they become available.

NRGence eco [PDU](#) supports any 3rd party V1, V2, V3 SNMP Manager Software, NRGence [eco Sensors](#) (eco [PDU](#) Manager Software), and [CC2000](#) Control Center Over the NET software. [Eco Sensors](#) provides you with an easy method for managing multiple devices, offering an intuitive and user-friendly Graphical User Interface that allows you to configure a [PDU](#) device and monitor power status of the equipment connected to it.

With its advanced security features and ease of operation, the eco [PDU](#) is the most convenient, most reliable, and most cost effective way to remotely manage power access for multiple computer installations and allocate power resources in the most efficient way possible.

Note:

* Sensors are optional accessories. A sensor-enabled installation is required to generate a more complete energyefficient data and chart. Higher sensor installation density is helpful to generate more accurate data.

** eco [PDU](#)s are primarily designed for access via Intranet; extra network security protection is suggested for Internet access usage.

Features


- **Connections**
 - Supports 10/100Mbit Ethernet, OOB, RS-232, Daisy Chain interface
 - Supports TCP/IP, PPP, UDP, HTTP, HTTPS, SSL, STP, DHCP, ARP, NTP, DNS, Telnet, Auto Sense, Ping, SNMP V1,V2&V3, IPv6
 - Supports three-level account/password security, IP/MAC filter, 128 bit SSL, RADIUS, TACACS+, LDAP, LDAPS and Active Directory
 - Supports [CC2000](#), [eco Sensors](#), Java API, multiple Browsers (IE, Firefox, Chrome, Safari)
- **Metering**
 - PDU and outlet level power metering and monitoring
 - Environment monitoring – supports external temperature/temperature & humidity sensors for rack temperature and humidity monitoring
 - Current, voltage, power, power dissipation, temperature, and humidity metering and threshold level setting
- **Outlet Switch Control**
 - Daisy chain with PON In – PON Out port
 - Always On

Specifications

Function	PE7324rB	PE7324rG
Electrical		
Nominal Input Voltage	100 – 240 VAC	100 – 240 VAC
Maximum Input Current	30A(Max); 24A(UL de-rated)	32A(Max)
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	NEMA L6-30P	IEC 60309 32A
Input Power	6240 VA(Max); 4992 VA(UL de-rated)	7360 VA(Max)
Outlet Type	Total: 21 x IEC320 C13 + 3 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19 Bank2: Outlet 17 – 24; 7 x C13 + 1 x C19	Total: 21 x IEC320 C13 + 3 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19 Bank2: Outlet 17 – 24; 7 x C13 + 1 x C19
Nominal Output Voltage	100 – 240 VAC	100 – 240 VAC
Maximum Output Current (Outlet)	C13: 15A(Max); 12A(UL de-rated) C19: 15A(Max); 12A(UL de-rated)	C13: 10A(Max) C19: 16A(Max); TUV De-rated 15A(Max)
Maximum Output Current (Bank)	15A(Max); 12A(UL de-rated)	16A(Max); TUV De-rated 15A(Max)
Maximum Output Current (Total)	30A(Max); 24A(UL de-rated)	32A(Max); TUV De-rated 30A(Max)
Breakers	2 x 16A UL489 Breaker	2 x 16A UL489 Breaker
Metering	Outlet Level Current, Voltage, VA , PF and kWh Monitoring	Outlet Level Current, Voltage, VA , PF and kWh Monitoring
Outlet Switching	None	None
Environment Sensor Ports	4	4
Metering Accuracy	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%
Physical Properties		
Dimensions (L x W x H)	132.5 x 6.6 x 4.4 cm	132.5 x 6.6 x 4.4 cm
Weight	3.7 kg	3.7 kg

Power Cord Length	1.6 m	1.6 m
Environmental		
Temperature (Operating / Storage)	0–50°C / -20–60°C	0–40°C / -20–60°C
Humidity (Operating & Storage)	0–80% RH, Non-Condensing	0–80% RH, Non-Condensing
Compliance		
EMC Verification	FCC, Others by Request	CE, C-Tick, Others by Request
Safety Verification	PSE, Others by Request	GOST, Others by Request
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	

Diagram

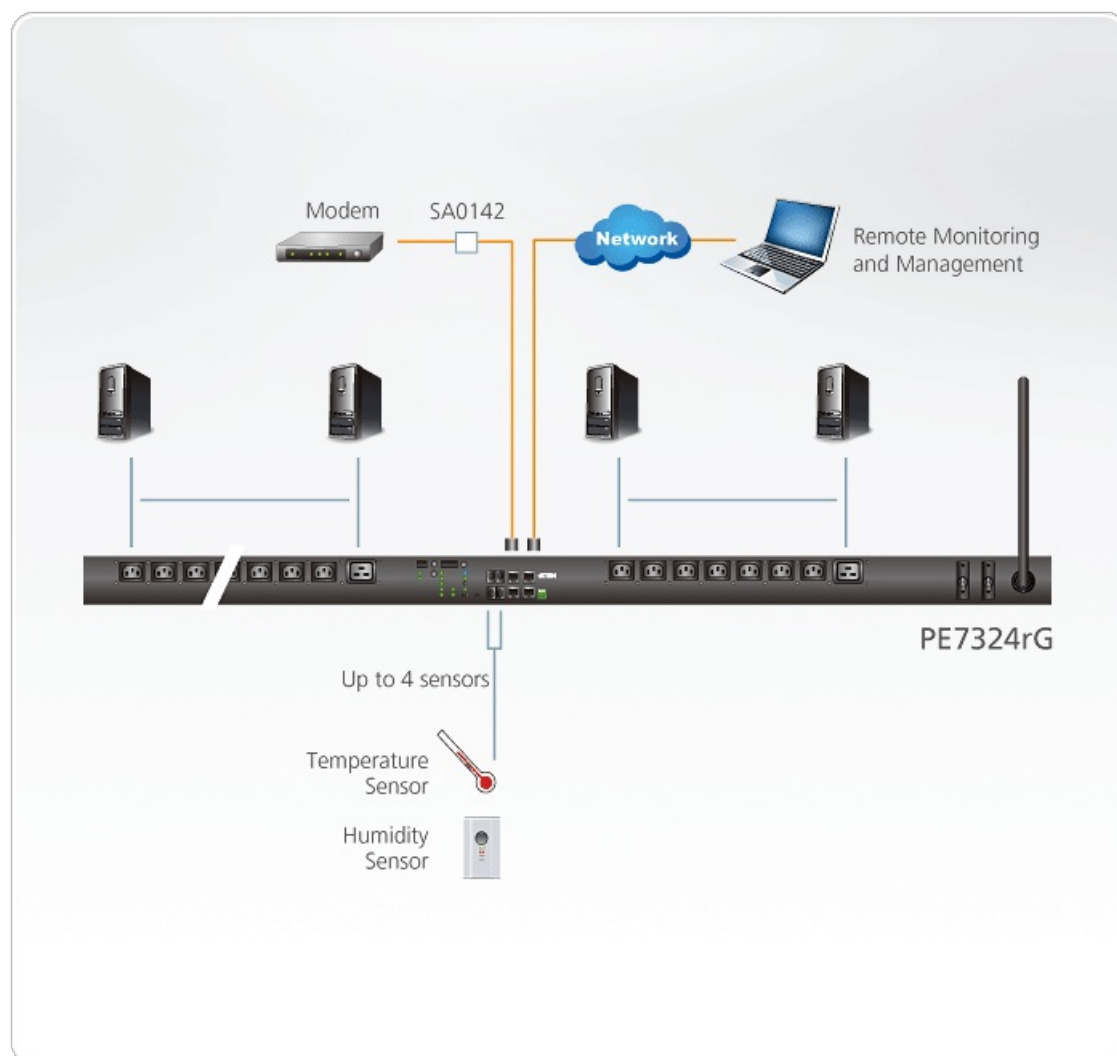



Simply Better Connections

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.