

## PE9324

eco PDU



As part of its NRGence line, ATEN has developed a new generation of green energy power distribution units (eco [PDUs](#)) to effectively increase the efficiency of [data center](#) power usage. The NRGence PE9324 eco [PDUs](#) are intelligent [PDUs](#) that contain 24 AC outlets and are available in various IEC socket configurations. Models in the advanced PE9 range feature a dedicated 8/14-outlet bank for critical load devices, and PE9 ranges feature NRGence's proactive overload protection, which automatically powers off the last outlet that caused the current overload.

NRGence eco [PDUs](#) provide secure, centralized, intelligent, power management (power on, off, cycle) of [data center](#) IT equipment (servers, storage systems, KVM switches, network devices, serial data devices, etc.), as well as the ability to monitor the center's health environment via sensors.

NRGence eco [PDUs](#) offer remote power control combined with real-time power measurement – allowing you to control and monitor the power status of devices attached to the [PDUs](#), either at the [PDU](#) device, bank, or outlet level, depending on the model, from practically any location via a TCP/IP connection.

The power status of each outlet can be set individually, allowing users to switch each device On/Off. The eco [PDU](#) also offers comprehensive power analysis reports which can separate departments and locations, providing precise measurements of current, voltage, power and watt-hour in a real-time display. Installation and operation is fast and easy: plugging cables into their appropriate ports and user-friendly browser-based configuration and management is all that is entailed. Since the eco [PDU](#) firmware is upgradeable over the Net, you can stay current with the latest functionality improvements simply by downloading updates from our website as they become available.

NRGence eco [PDU](#) supports any 3rd party V3 SNMP Manager Software and NRGence [eco Sensors](#) (eco [PDU](#) Manager Software). [eco Sensors](#) provides you with an easy method for managing multiple devices, offering an intuitive and user-friendly Graphical User Interface that allows you to configure a [PDU](#) device and monitor power status of the equipment connected to it.

With its advanced security features and ease of operation, the eco [PDU](#) is the most convenient, most reliable, and most cost effective way to remotely manage power access for multiple computer installations and allocate power resources in the most efficient way possible.

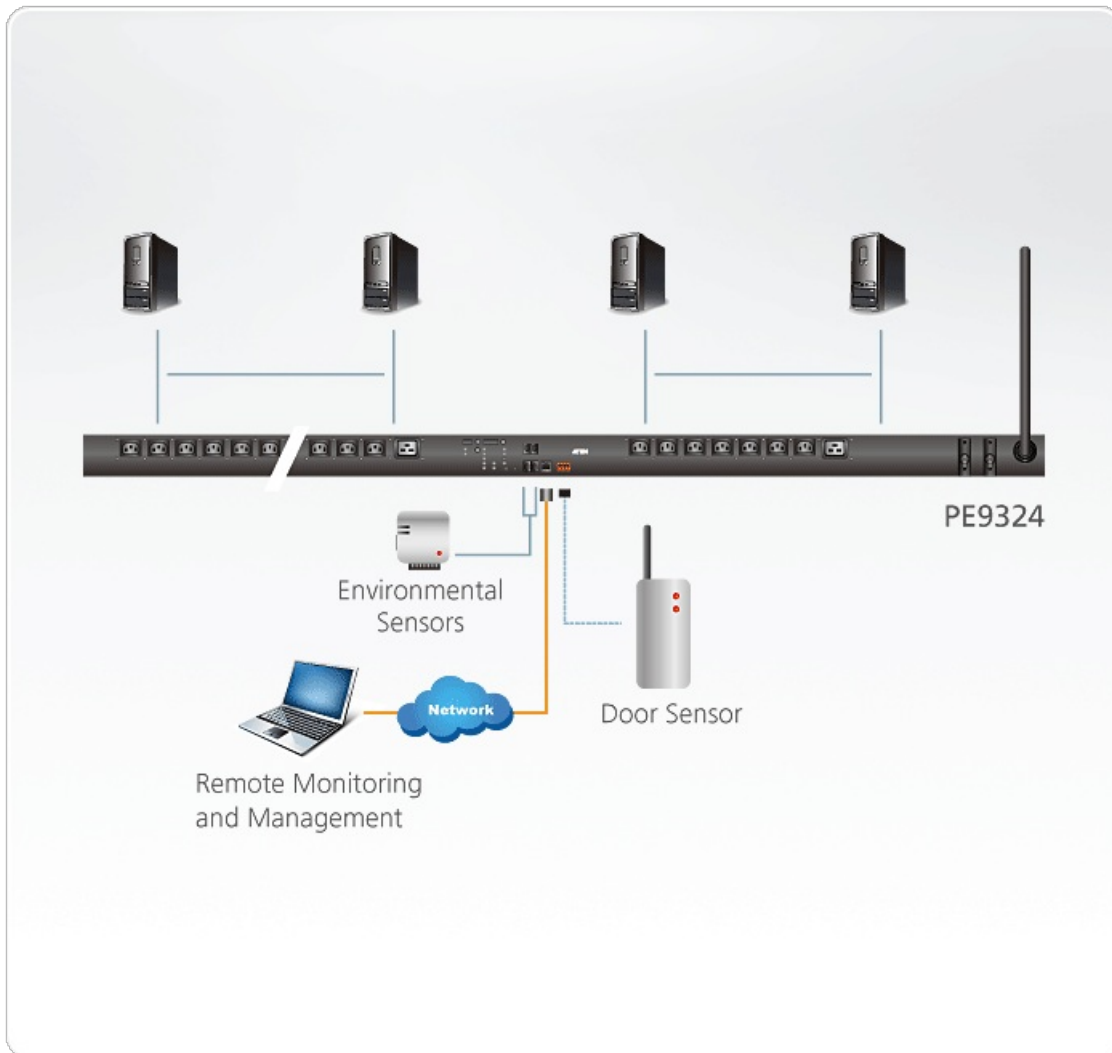
## Features

- **Connections**
  - Support 10/100Mbit Ethernet Interface
  - Support TCP/IP, UDP, HTTP, HTTPS, SSL, DHCP, SMTP, NTP, DNS, Auto Sense, Ping, SNMP V1,V2&V3
  - Support 2-level account/password security, IP/MAC filter, 128 bit SSL, RADIOUS
  - Support : [eco Sensors](#), Browser ( IE, Firefox, Chrome, Safari )
- **Metering**
  - PDU and outlet level power metering and monitoring
  - Environment monitoring – supports external temperature/temperature & humidity sensors for rack temperature and humidity monitoring
  - Current, voltage, power, power dissipation, temperature, and humidity metering and threshold level setting
- Support door sensor
- **Outlet Switch Control**
  - Remote power outlet control (On/Off, Power Cycle) by individual outlets and outlet groups
  - Outlet group support at the [PDU](#)
  - Supports multiple power control methods – Wake on LAN, System After AC Back, Kill the Power
  - Power-On sequencing – users can set the power-on sequence and delay time for each outlet to allow equipment to be powered on in the correct order
  - Critical load outlet – keeps power always on for critical load devices
  - Proactive overload protection(POP) – automatically powers off the last outlet that caused the current overload

## Specifications

Function	PE9324B	PE9324G
Electrical		
Nominal Input Voltage	100 – 240 VAC	100 – 240 VAC
Maximum Input Current	30A Max; 24A (UL de-rated)	32A Max
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	NEMA L6-30P	IEC 60309 32A
Input Power	6240 VA(Max); 4992 VA(UL de-rated)	7360 VA(Max)
Outlet Type	Total: 21 x IEC320 C13 + 3 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19 Bank2: Outlet 17 – 24; 7 x C13 + 1 x C19	Total: 21 x IEC320 C13 + 3 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19 Bank2: Outlet 17 – 24; 7 x C13 + 1 x C19
Nominal Output Voltage	100 – 240 VAC	100 – 240 VAC
Maximum Output Current (Outlet)	C13: 15A(Max); 12A(UL de-rated) C19: 15A(Max); 12A(UL de-rated)	C13: 10A(Max) C19: 16A(Max); TUV De-rated 15A(Max)
Maximum Output Current (Bank)	15A(Max); 12A(UL de-rated)	16A(Max); TUV De-rated 15A(Max)
Maximum Output Current (Total)	30A(Max); 24A(UL de-rated)	32A(Max); TUV De-rated 30A(Max)
Breakers	2 x 16A UL489 Breaker	2 x 16A UL489 Breaker
Metering	Outlet Level Current, Voltage, VA, PF, KWh Monitoring	Outlet Level Current, Voltage, VA, PF, KWh Monitoring
Outlet Switching	Bank1-1: None Bank1-2: Yes Bank2: Yes	Bank1-1: None Bank1-2: Yes Bank2: Yes
Environment Sensor Ports	4	4

Metering Accuracy	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%
Physical Properties		
Dimensions (L x W x H)	177.50 x 6.60 x 4.40 cm (69.88 x 2.6 x 1.73 in.)	177.50 x 6.60 x 4.40 cm (69.88 x 2.6 x 1.73 in.)
Weight	6.26 kg ( 13.79 lb )	6.26 kg ( 13.79 lb )
Power Cord Length	1.6 m	1.6 m
Environmental		
Temperature (Operating / Storage)	0 – 50°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Humidity (Operating & Storage)	0 – 80% RH, Non-Condensing	0 – 80% RH, Non-Condensing
Compliance		
EMC Verification	FCC Part 15 Class A, Others by Request	CE, Others by Request
Safety Verification	By Request	CE-LVD, Others by Request
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	

**Diagram****ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.