

## PE0324B

0U Basic PDU

PE0324B



ATEN's Basic [PDU](#) family is extended with 0U members containing 24 outlets and available in IEC socket configurations. The compact aluminum housing gives a sleek, yet robust look while minimizing installation space for work space efficiency. The Basic [PDUs](#) are tailored made for individuals who are in need of industrial-grade, easy-to-deploy power distribution unit in [data centers](#), server rooms, and network wiring closets.


### Features

- Space saving – 0U rack mount design
- IEC outlet model
- Aluminum material
- Works with [data centers](#), server rooms, and telecom equipment

## Specifications

Electrical	
Nominal Input Voltage	100-240 VAC
Maximum Input Current	30A Max (UL de-rated 24A Max)
Input Frequency	50-60 Hz
Input Connection	NEMA L6-30P
Input Power	7200VA(Max); 5760VA(UL de-rated)
Outlet Type	(22) IEC 320 C13, (2) IEC 320 C19
Maximum Output Current (Outlet)	C13: 15A Max (UL de-rated 12A Max) C19: 20A Max (UL de-rated 16A Max)
Maximum Output Current (Bank)	20A Max (UL de-rated 16A Max)
Maximum Output Current (Total)	30A Max (UL de-rated 24A Max)
OPD(Overcurrent Protection Device)	Yes
Physical Properties	
Dimensions (L x W x H)	120.71 x 4.44 x 6.00 cm (47.52 x 1.75 x 2.36 in.)
Weight	2.80 kg ( 6.17 lb )
Power Cord Length	10ft(10#)
Environmental	
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m
Compliance	
EMC Verification	FCC Class A
Safety Verification	UL, other by request
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

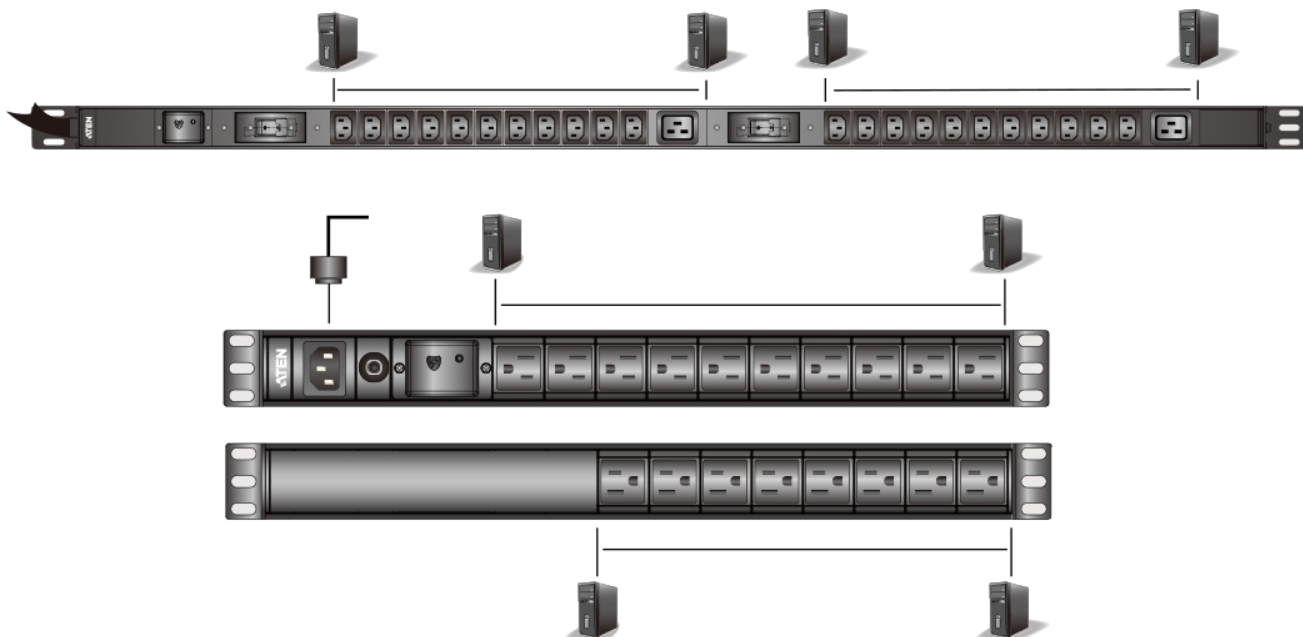

Note: (1) As there are many Basic PDUs, PE0324S (top) and PE0118S (bottom) are the respective 0U and 1U examples used here.

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.