

PE5221T

16A 21-Outlet Metered Thin Form Factor eco PDU



The ATEN NRGence™ PE5221T eco [PDUs](#) are thin form factor intelligent [PDUs](#) that contain 21 AC outlets available in IEC or NEMA socket configurations. The lightweight thin form factor eco [PDUs](#) have a smaller width and input region than ATEN's standard and low profile [PDUs](#). The thin form factor series have a 56 mm width that fits tight into server racks providing more space for cooling and maintenance. The smaller design leaves 8% more space in the rack to increase air flow and cool IT equipment more effectively. It also means faster maintenance with easier access to equipment normally installed behind the [PDU](#).

NRGence™ eco [PDUs](#) offer real-time power measurement and threshold alerts – allowing you to monitor the [PDU](#)'s power status, bank status and circuit breakers, either at the [PDU](#) or from any location via a TCP/IP connection.

With the combination of ATEN eco [PDUs](#) and [eco DC](#) Energy Management Web GUI, a data center is equipped with real-time monitoring, measurement and analysis of energy consumption – with reports of power usage and [PUE](#) to meet the ISO 50001 requirements. These indexes will automatically generate customized reports about your data center's energy use and include energy saving suggestions. The suggestions allow you to optimize energy usage and save money without harming your IT equipment's reliability. [eco DC](#) Energy Management Web GUI provides easy multi-PDU management with an intuitive user-friendly interface that allows you to configure [PDUs](#) and monitor the power status of equipment connected to them.

Features

- Thin form factor design with 56 mm width
- Built-in 10/100 Mbps Ethernet port
- Supports TCP/IP, UDP, HTTP, HTTPS, SSL, DHCP, SMTP, NTP, DNS, Auto Sense, Ping, Telnet, and SNMP V1, V2&V3
- 2-level account and password security
- IP/MAC filters, SSL 128-bit data encryption and RADIUS for remote authentication
- Supports [eco DC](#) Energy Management Software
- Browser access via IE, Firefox, Chrome, Safari and more
- Bank level power metering and monitoring
- Environment monitoring via external sensors for rack temperature and humidity readings with threshold alerts
- Real-time aggregate current, voltage, power, and aggregate power dissipation displayed in a browser-based UI
- Space saving 0U rack mount design with rear mounting
- Lok-U-Plug and EZ-Lok Holders – easily secures power cables to the [PDU](#)

[eco DC](#) Energy Management Software*

- Automatic discovery of all ATEN [PDUs](#) within the same intranet
- Remote real-time power measurement and monitoring of [PDUs](#)
- Real-time environment monitoring via sensors
- Plotting and monitoring of all ATEN [PDU](#) devices
- Exceed threshold alerts through real-time monitoring, SMTP and System log
- Power analysis reports


* [eco DC](#) is designed to work with NRGence™ eco [PDUs](#), and is bundled with all PE series packages.

Specifications

Electrical	
Nominal Input Voltage	100 – 240 VAC
Maximum Input Current	16A(Max)
Input Frequency	50-60 Hz
Input Connection	For B Plug: NEMA 6-20P For G Plug: IEC 60320 C20
Input Power	3680 VA(Max)
Outlet Type	Total: 18 x IEC320 C13 + 3 x IEC320 C19
Nominal Output Voltage	100 – 240 VAC
Maximum Output Current (Outlet)	For B Plug: C13: 12A C19: 16A For G Plug: C13: 10A C19: 16A
Maximum Output Current (Bank)	16A(Max)
Maximum Output Current (Total)	16A(Max)
Metering	Bank Level Current, Voltage, VA , PF and kWh Monitoring
Outlet Switching	None
Environment Sensor Ports	2
Metering Accuracy	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%
Physical Properties	
Dimensions (L x W x H)	90.20 x 5.60 x 4.80 cm (35.51 x 2.2 x 1.89 in.)
Weight	2.34 kg (5.15 lb)
Power Cord Length	3 m
Environmental	
Temperature (Operating / Storage)	For B Plug: 0–50°C / -20–60°C For G Plug: 0–40°C / -20–60°C
Humidity (Operating & Storage)	0–80% RH, Non-Condensing
Compliance	
EMC Verification	CE, FCC, J55022 Others by Request
Safety Verification	CE-LVD, PSE, Others by Request

Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.
------	---

Diagram

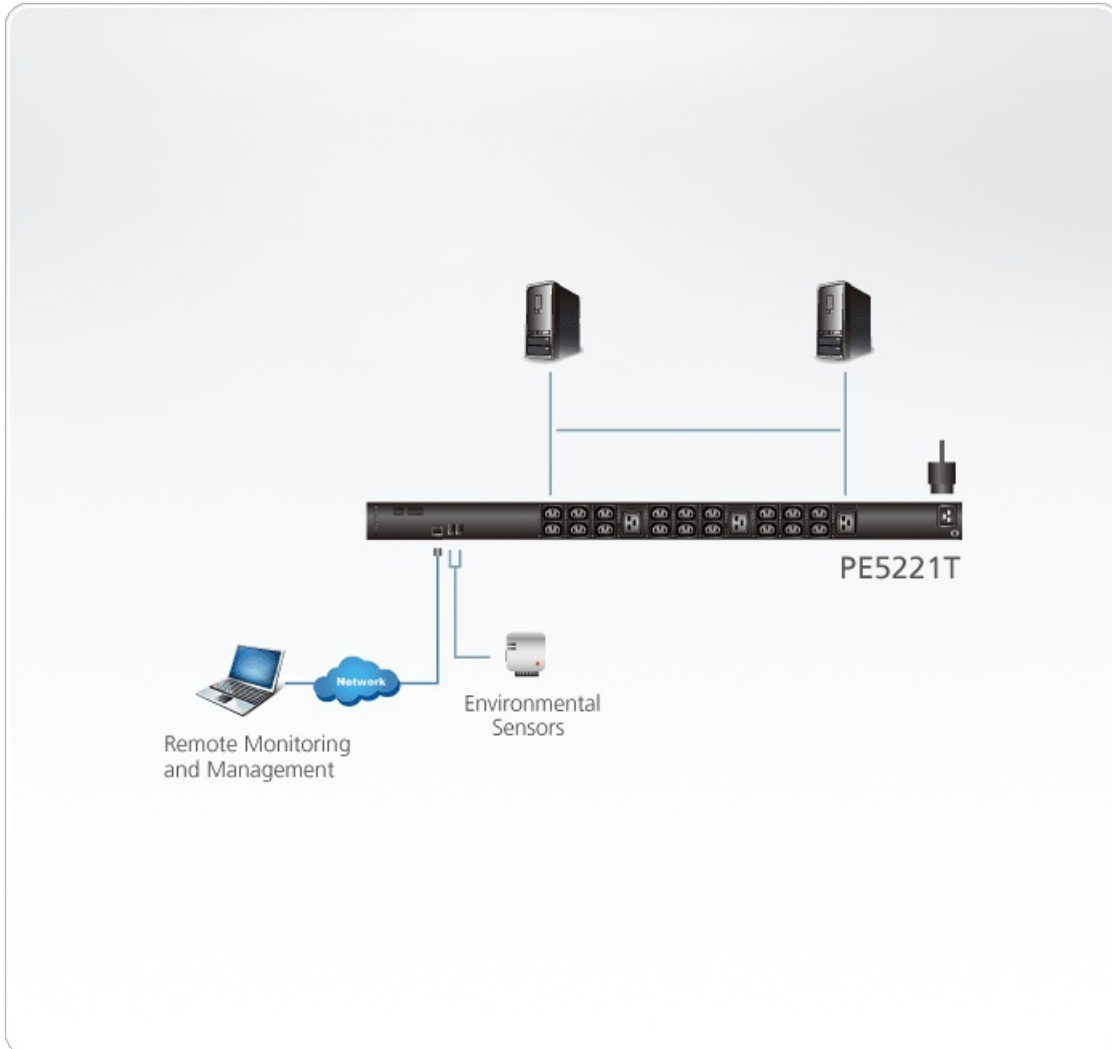

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

 © Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.