

VC081A

True 4K HDMI EDID Emulator Adapter



As a [True 4K](#) HDMI [EDID](#) Emulator Adapter, the VC081A is designed to emulate and store one set of the [EDID](#) from the connected display while facilitating 4K video transmission. By learning the [EDID](#) from the HDMI display and relaying it to the video source, the VC081A helps to eliminate video communication problems that occur due to the [EDID](#) data synchronization failure between the HDMI video source and the connected display.

The VC081A contains a unique "Learn Button Switch" to allow [EDID](#) to be effectively learned and saved. Once the [EDID](#) is learned, the VC081A can be used to keep a PC or server awake from a remote location over IP instead of the monitor. The VC081A is an ideal device for avoiding blank or blink display issues led by communication errors between sources and displays when integrating a Pro AV system.



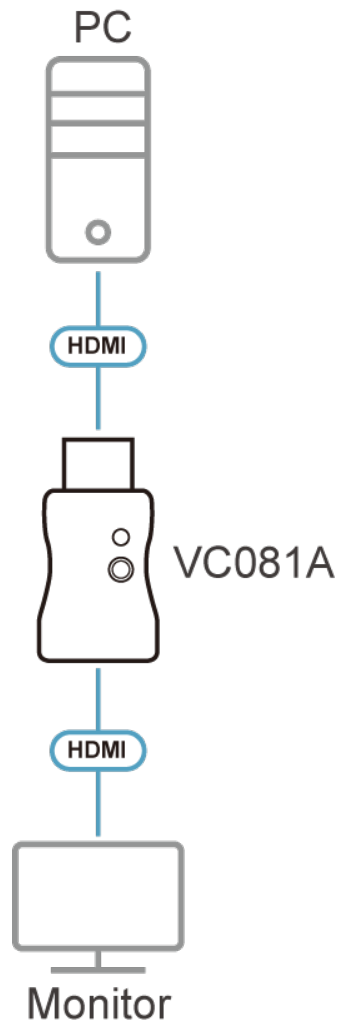
Features

- Manages [EDID](#) communication between connected devices
- Effectively learns and saves the [EDID](#) from the connected HDMI display via single pushbutton and relays it to the video source
- HDMI (3D, Deep Color, [True 4K](#)); [HDCP](#) 2.2 compliant
- Supports superior video quality up to 4096 x 2160 / 3840 x 2160 @ 60 Hz (4:4:4) via [EDID](#) Learning Mode
- LED indicators to show learning status
- Powered by HDMI source
- Compact and lightweight design

Specifications

Video Input	
Interfaces	1 x HDMI Type A Male (Black)
Impedance	100 Ω
Video Output	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Video	
Compliance	HDMI (3D, Deep Color, True 4K) HDCP 2.2 Compatible Consumer Electronic Control (CEC)
Max. Resolution	Default: 1080P@60Hz Learning: 3840x2160@60Hz 4:4:4 & 4096x2160@60Hz 4:4:4
EDID Settings	EDID Mode: Default / Learning
Connectors	
Power	Bus-powered (5V DC from source device)
Switches	
Mode Switch	EDID Learning
LEDs	
Status	Learning (Blue x 1)
Power Consumption	DC5V:0.1WBTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0 - 50 °C
Storage Temperature	-20 - 60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.08 kg (0.18 lb)
Dimensions (L x W x H)	4.40 x 2.40 x 1.18 cm (1.73 x 0.94 x 0.46 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.