

## VP1420

4 x 2 True 4K Presentation Matrix Switch




## VP1420

4 x 2 True 4K Presentation Matrix Switch




ATEN VP1420 is a multi-in-one [presentation switch](#) that integrates a [video matrix](#), [True 4K](#) scaler, audio processor, and analog-to-digital converter functions into one compact device. With four analog/digital inputs to two HDMI outputs, it is designed to boost the impact of any professional [presentation](#) in small- to medium-size [meeting rooms](#).

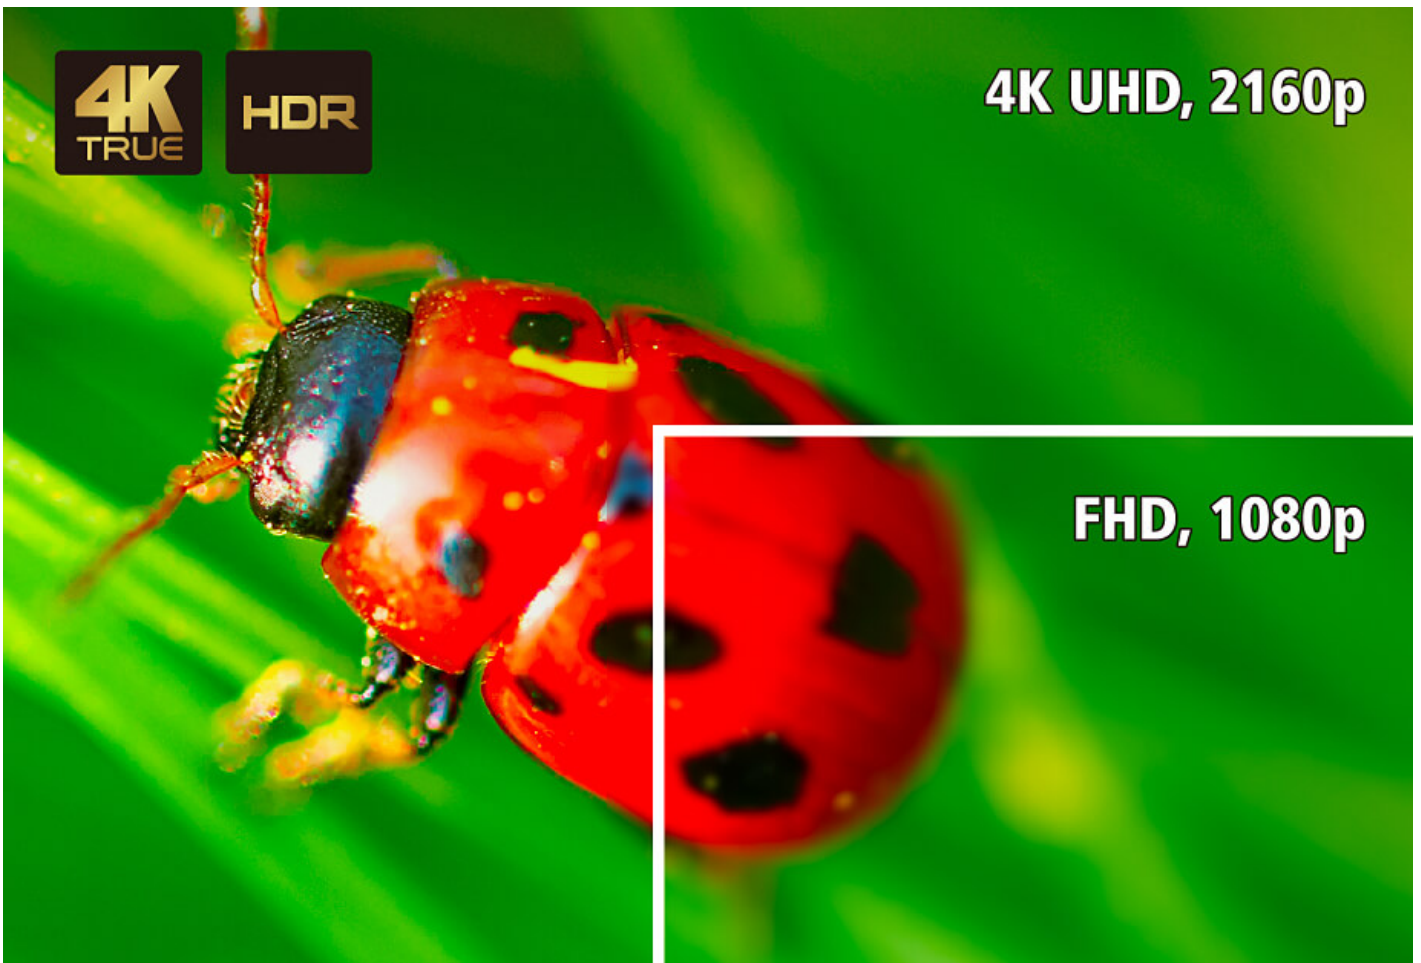**True 4K, HDR Visual Clarity**

Supports resolutions up to 4096 x 2160 @ 60Hz (4:4:4) with [HDR](#) to deliver vivid content in every [presentation](#).

**Smooth AV Switching Scaled to Perfection**

Connect up to 4 sources (3 HDMI, 1 VGA), smoothly switch between them and display contents scaled perfectly to [True 4K](#) and 1080p simultaneously.

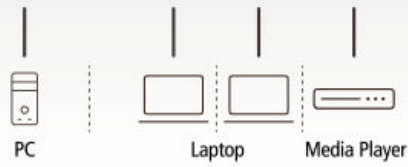

## Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[Contact Sales](#)



### Audio De-embedding

Extract HDMI audio to Audio Line Out



### Audio Embedding

Embed stereo audio into HDMI output or Audio Line Out

**Flexible Audio Embedding / De-Embedding**

Supports stereo audio embedding and HDMI audio de-embedding to different audio outputs to ease adaptation to your preferred audio setup.

**Versatile Control, Streamlined Operations**

Control via front-panel pushbuttons, IR remote, web-based GUI and any control interface via RS-232, Ethernet, and Contact Closure to streamline your operations.



Pushbuttons




IR Remote




Web GUI



RS-232



Ethernet



Contact Closure

## Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*

Company \*

Email \*

Phone Number

- Customer Type \*

Job Title \*



## Features

The ATEN VP1420 is a multi-in-one [presentation switch](#) that integrates a [video matrix](#) switch, [True 4K](#) scaler, audio processor, and analog-to-digital converter functions into one compact device that easily mounts under a table or in a rack. With four analog/digital inputs to two HDMI [True 4K](#) outputs, it is designed to boost the efficiency and impact of professional [presentations](#).

With streamlined control from front-panel pushbuttons, IR remote controller, RS-232, and web-based GUI via Ethernet, the VP1420 reduces not only system device count, but also lowers operation complexity. It is suitable for all meeting space and education environments, such as huddle rooms, [classrooms](#), training rooms, or any other [presentation](#) setting, such as in exhibition galleries or hotels.

### • Analog/Digital AV Matrix Switching

- Supports multi-format 4 inputs – 3 HDMI and 1 VGA inputs
- 2 HDMI outputs
- Audio embedding – stereo audio can be embedded into HDMI output or separated to stereo line out
- Audio de-embedding – HDMI audio can be extracted to stereo line out
- Auto switching – automatically detects and switches to a new source as soon as it is connected

### • High-definition Video with Optimum Output

- Superior video quality – [True 4K](#) resolutions up to 4096 x 2160@60Hz (4:4:4) (HDMI)
- Supports 4K [HDR](#)
- Scaler – supports video upscaling to 4K for display A and downscaling to 1080p for display B
- EDID Expert™ – automatically selects the optimum [EDID](#) settings for smooth power-up, high-quality display, and the best video resolution across connected devices
- HDMI (3D, Deep Color, 4K); [HDCP](#) 2.2 compliant

### • Versatile, Streamlined Operation

- Multiple control options – flexible control via front-panel pushbuttons, IR remote control, RS-232, and web-based GUI through Ethernet
- View and control via ATEN Video [Presentation](#) Control App in a swift and agile way
- Supports stand-by mode for power saving and fast waking up
- Consumer Electronics Control (CEC) support
- Built-in Contact in and LED out for keypad control using [VPK104](#) Contact Closure Remote Pad

## Specifications


Video Input	
Interfaces	3 x HDMI Type A female (Black) 1 x VGA (HDB-15) Female (Blue)
Max. Distance	HDMI: 4K@60Hz (4:4:4) at 5m; 4K@30Hz at 10m; 1080p@60Hz at 15m VGA: 1080p@60Hz at 15m
Video Output	
Interfaces	2 x HDMI Type A female (Black)
Max. Distance	HDMI: 4K@60Hz (4:4:4) at 5m; 4K@30Hz at 10m; 1080p@60Hz at 15m
Video	
Max. Resolution	HDMI: Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:4:4) VGA: Up to 1080p@60Hz
Compliance	HDMI (3D, Deep Color, 4K); 4K HDR HDCP 2.2 Compatible; Consumer Electronics Control (CEC)

Audio	
Input	Stereo Audio (VGA): 1 x mini stereo Jack female (Green) Stereo Audio (HDMI): 1 x mini stereo Jack female (Green)
Output	Line Out (Unbalanced): 1 x Captive Screw Connector, 3-pole
Control	
RS-232	1 x Captive Screw Connector, 3-pole
IR	1 x Mini Stereo Jack Female (Black)
Ethernet	1 x RJ-45 Female (Silver)
Contact In	1 x Captive Screw Connector, 5-pole
LED Out	1 x Captive Screw Connector, 5-pole LED out power: +5 VDC, 0.2 A
Switches	
Power	1 x Pushbutton (LED: Green / Orange)
Video Input Port Selection	4 x Pushbutton (LED: Green)
Video Output Port Selection	2 x Pushbutton (LED: Orange)
Selection	Mute: 1 x Pushbutton Mode / Unlock: 1 x Pushbutton
EDID Settings	EDID Mode: ATEN Default / Display A / Remix
Connectors	
Power	1 x DC Jack (Black)
Power Consumption	DC5V:7.21W:38BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Environmental	
Operating Temperature	0-40°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	1.09 kg ( 2.4 lb )
Dimensions (L x W x H)	20.00 x 16.05 x 4.40 cm (7.87 x 6.32 x 1.73 in.)
Carton Lot	3 pcs



Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.
------	---

Diagram

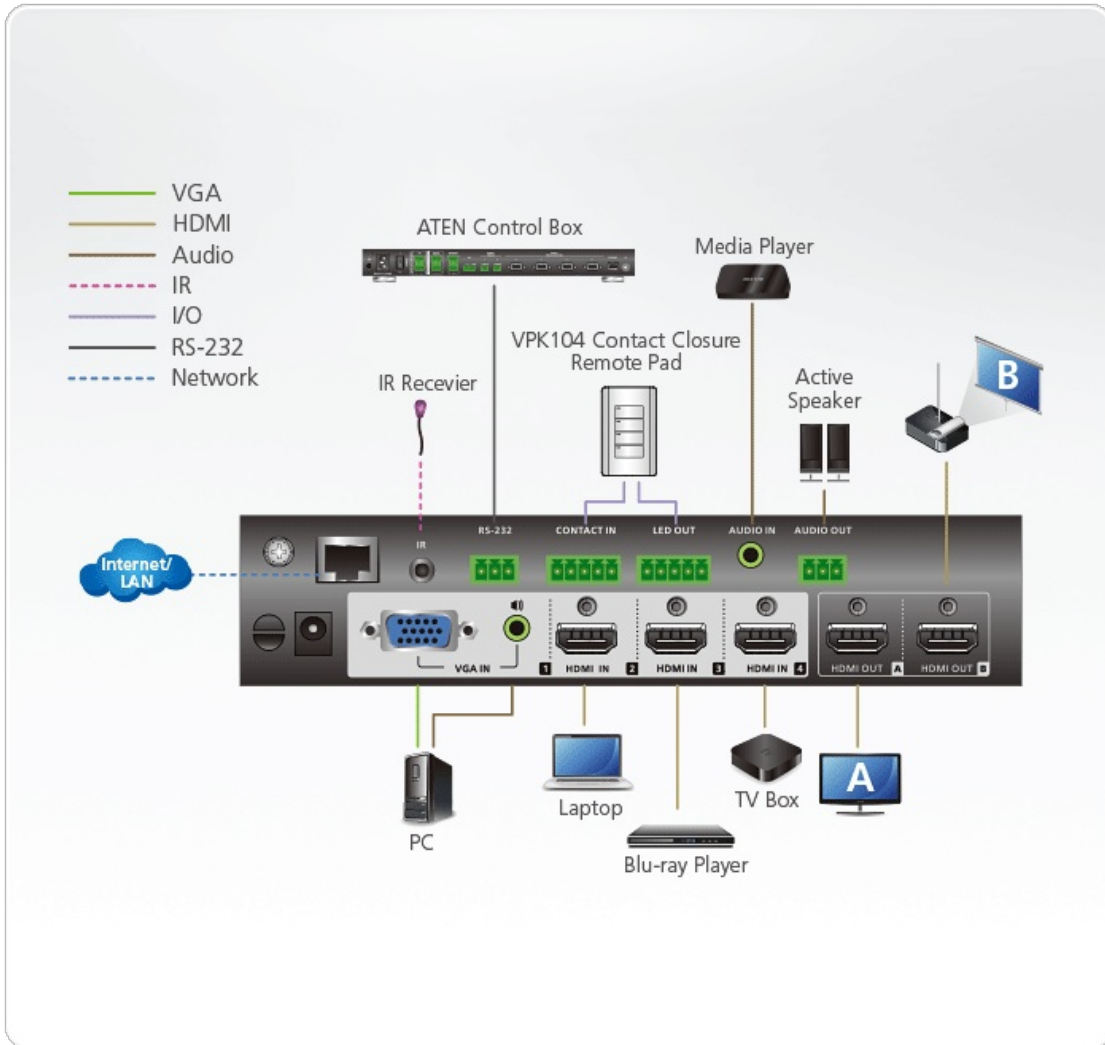

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.