



VP201

PresentON® Wireless Dongle for Conferences



The VP201 works in conjunction with the [VP2020/VP2021](#) 4K Wireless Presentation Switch to take BYOD & BYOM to the next level. With just one quick click, users can share screen content from their own USB-C laptops wirelessly, eliminating restrictive cables. USB touchback assures presenters efficient remote control over their PCs from the touchscreen/ interactive whiteboard in the room without having to go back and forth. Plus, due to the VP201's universal, cross-platform compatibility, participants can interact directly with content from their USB conference devices, such as microphones, cameras, and speakers, and host meetings on all major operating systems using their preferred video conferencing tool like Microsoft Teams and Zoom and the native screen mirroring protocols like AirPlay®, Google Cast™, and Miracast. The VP201 does not just transform traditional meeting spaces into hybrid conference rooms, but also fosters collaboration among the organization and the remote team members.

*The information contained is the property of ATEN International Co. LTD or their respective owners. All rights reserved. AirPlay® is a trademark of Apple Inc., registered in the U.S. and other countries and regions. Google Cast™ is a trademark of Google LLC. Any other brand names or marks are used for compatibility description only and are trademarks or registered trademarks of their respective owners.




Features

- Wireless A/V content casting and power supply via a single USB-C port with just one click
- USB touchback – enables PC control via the in-room eWhiteboard or content interaction from users' USB devices
- Bring Your Own Device (BYOD) – share content from users' USB-C laptops / mobile devices wirelessly
- Bring Your Own Meeting (BYOM) –
 - Host / Join a video conference using your preferred tool directly from your laptop
 - Supports video conferencing tools like Microsoft Teams, Google Meet, and Zoom
 - Supports in-room AV equipment ranging from cameras, microphones to speakers
- OS-independent – work on Windows / macOS / Linux
- Point-to-point wireless transmission via native mirroring when connecting to [VP2020 / VP2021](#)
- Plug-and-play with no need to install software / drivers

Specifications

Video Input	
Interfaces	1 x USB Type-C
Video	
Max. Data Rate	Average ~ 12Mbps
Max. Resolution	Up to 1080p@60Hz
Wireless	
Authentication Protocol	WPA2-PSK in stand alone mode WPA2-PSK or IEEE 802.1X using the ATEN Present On solution in network integration mode
Wireless Transmission Protocol	IEEE 802.11 a/g/n/ac
Frequency Band	Switchable dual band 2.4GHz and 5GHz (DFS channels not supported)
Reach	Up to 10m (33ft) line of sight from Dongle to Station
Connectors	
Console Ports	1 x USB Type C male
Power	1 x USB Type C male
Pushbuttons	
Operating Mode Selection	1 x Video Sharing ON/OFF 1 x USB Conference ON/OFF
LEDs	
LED Indicator	1 x Video Sharing status LED 1 x Conference Status LED
Power Consumption	DC5V:1.37W
Environmental	
Operating Temperature	0-40°C
Storage Temperature	-10 - 70°C
Humidity	20 - 80% RH, Non-Condensing for Operation
Physical Properties	
Housing	Plastic
Weight	0.09 kg (0.2 lb)
Dimensions (L x W x H)	6.70 x 6.90 x 1.50 cm (2.64 x 2.72 x 0.59 in.)
Carton Lot	30 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

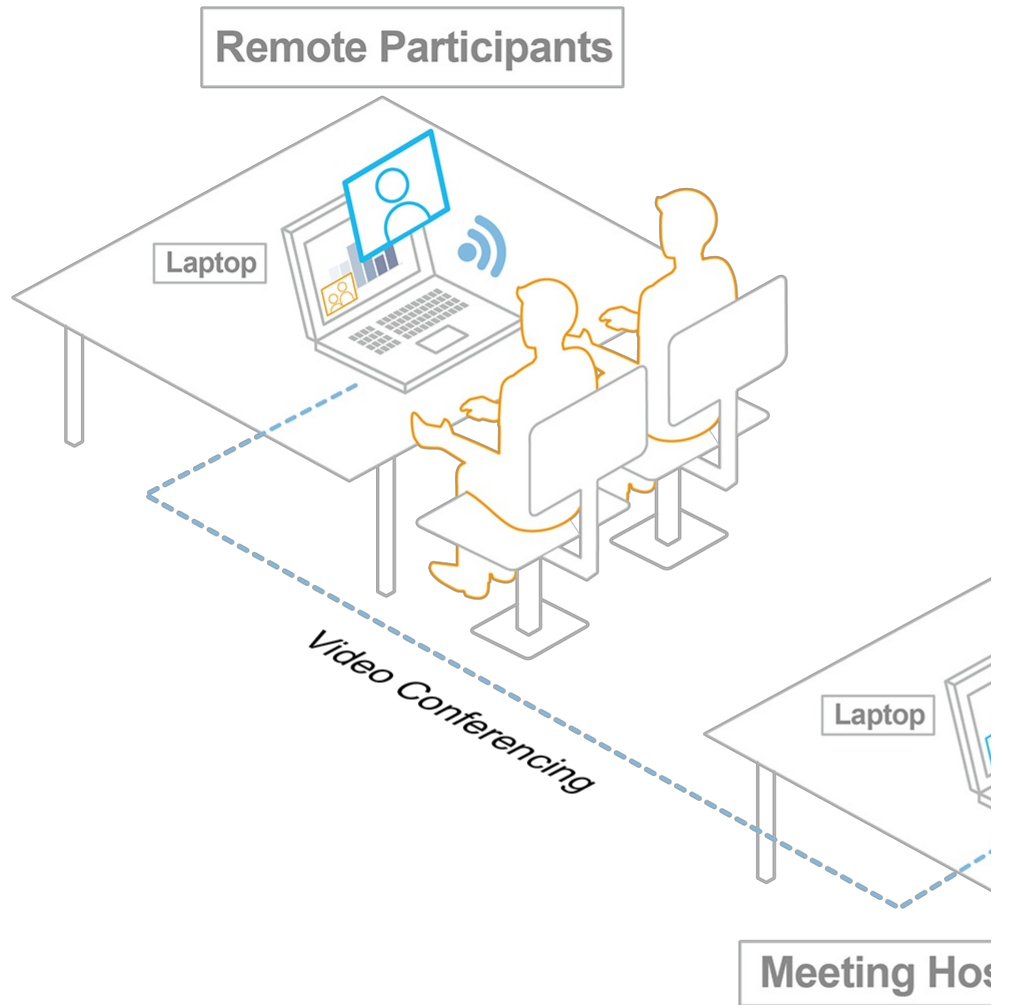



Simply Better Connections

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.