

VC880

HDMI Repeater Plus Audio De-embedder



The VC880 is an HDMI Repeater with an added audio de-embedder that extracts and converts the audio signal from the HDMI input. This means that as well as the repeated HDMI audio and video signal output, users can also choose between analog stereo audio via RCA connectors or digital audio via optical or coaxial connectors as an additional high quality audio output. With support for 3D TV formats, the VC880 is ideal for users who want to enjoy high definition video with their choice of high definition audio output on TVs, projectors, A/V receivers or speakers.

			A/V Out
			HDMI
	A/V In		HDCP
	HDMI		
	Stereo Audio	5.1 Channel	
	Audio Out		Digital Audio
	Coaxial		Toslink

Full HD 1080P

Features

- Repeats HDMI input signal up to 15 meters
- Extracts HDMI audio signal and outputs as additional audio source
- Supports optical / coaxial digital audio and analog stereo audio*
- HDCP 1.1 compatible
- Superior Video Quality – up to 1920x1080 (1080p)
- Firmware upgradable
- CH2/CH5.1/Auto mode audio channel selection
- HDMI (3D)
- Supports Dolby True HD and DTS HD Master Audio
- Supports Audio on/off switch for HDMI output
- Expandable to three levels – provides three levels of audio output for one HDMI at distance up to 45 m
- Integrates with Apple TV for the perfect home entertainment system

*Supported Audio Input Channels


	Source audio input channel				
Audio Output	Stereo (LPCM 2)	DTS 5.1 Dolby 5.1	LPCM 5.1	DTS 7.1 Dolby 7.1	LPCM 7.1
TosLink	Stereo	DTS 5.1 Dolby 5.1	2 channel (Front Right & FrontLeft)	Non support	2 channel (Front Right & FrontLeft)
Coaxial	Stereo	DTS 5.1 Dolby 5.1	2 channel (Front Right & FrontLeft)	Non support	2 channel (Front Right & FrontLeft)
Stereo	Stereo	Non support	2 channel (Front Right & FrontLeft)	Non support	2 channel (Front Right & FrontLeft)

Specifications

Video Input	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	3m at 1920*1080@60 (4:4:4)
Video Output	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	15m at 1920*1080@60 (4:4:4)
Video	
Max. Data Rate	6.75 Gps (2.25 Gbps Per Lane)
Max. Pixel Clock	225 MHz
Compliance	HDMI (3D, Deep Color) HDCP Compatible
Max. Resolution	Up to 1920 x 1080

Audio	
Output	1 x HDMI Type A Female (Black); 1 x Toslink (Black); 1 x RCA (Orange); 2 x RCA (Red/White);
Connectors	
Power	1 x DC Jack
Power Consumption	DC5.3V:2.25W:11BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0 - 50 °C
Storage Temperature	-20 - 60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.46 kg (1.01 lb)
Dimensions (L x W x H)	20.00 x 8.20 x 2.50 cm (7.87 x 3.23 x 0.98 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

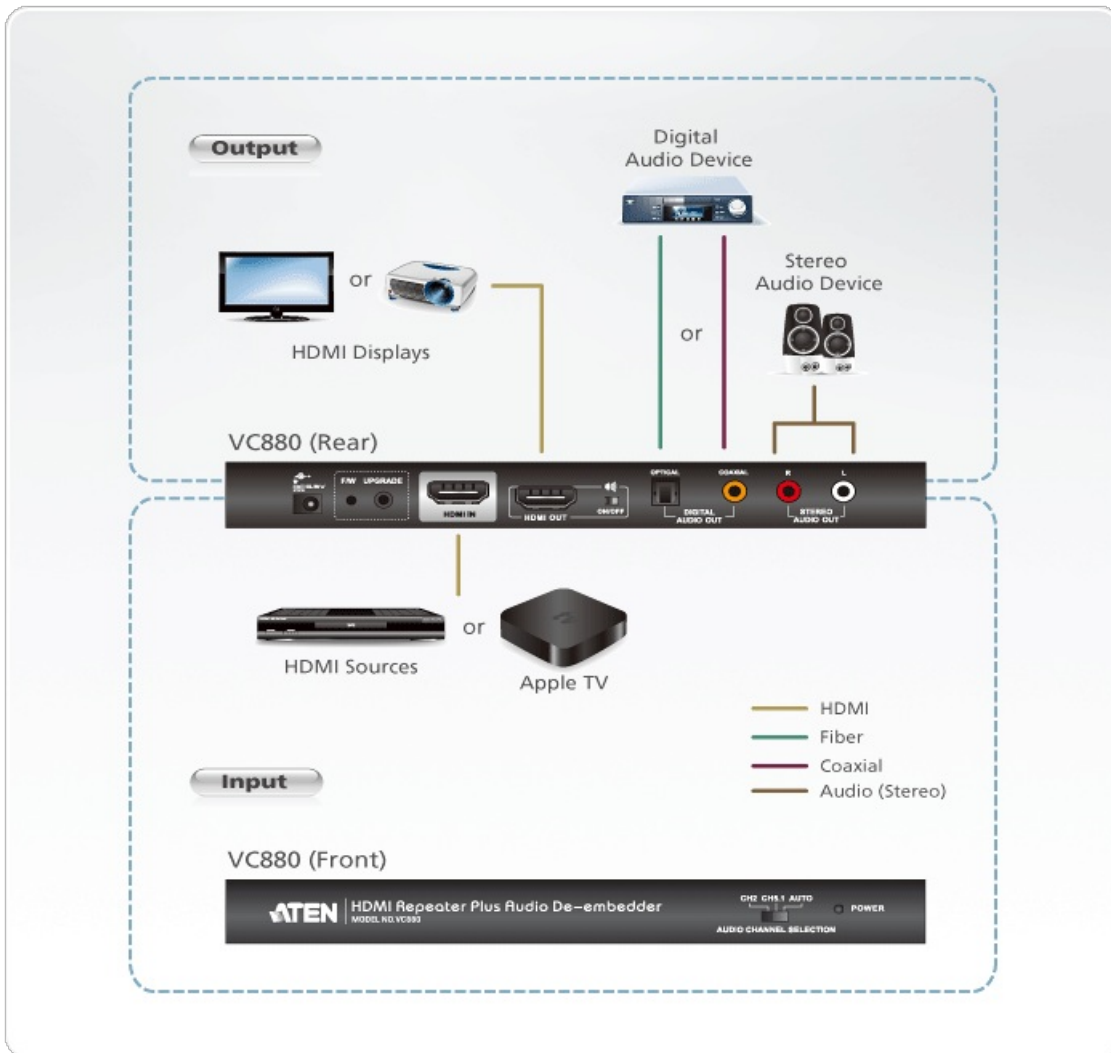

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.