

## VC925

DisplayPort to VGA Adapter



## DisplayPort to VGA Adapter



**Plug-n-Play**

No installation software or drivers required. The VC925 is the perfect solution for connecting DisplayPort inputs to VGA output displays.

**Superior Video Resolution**

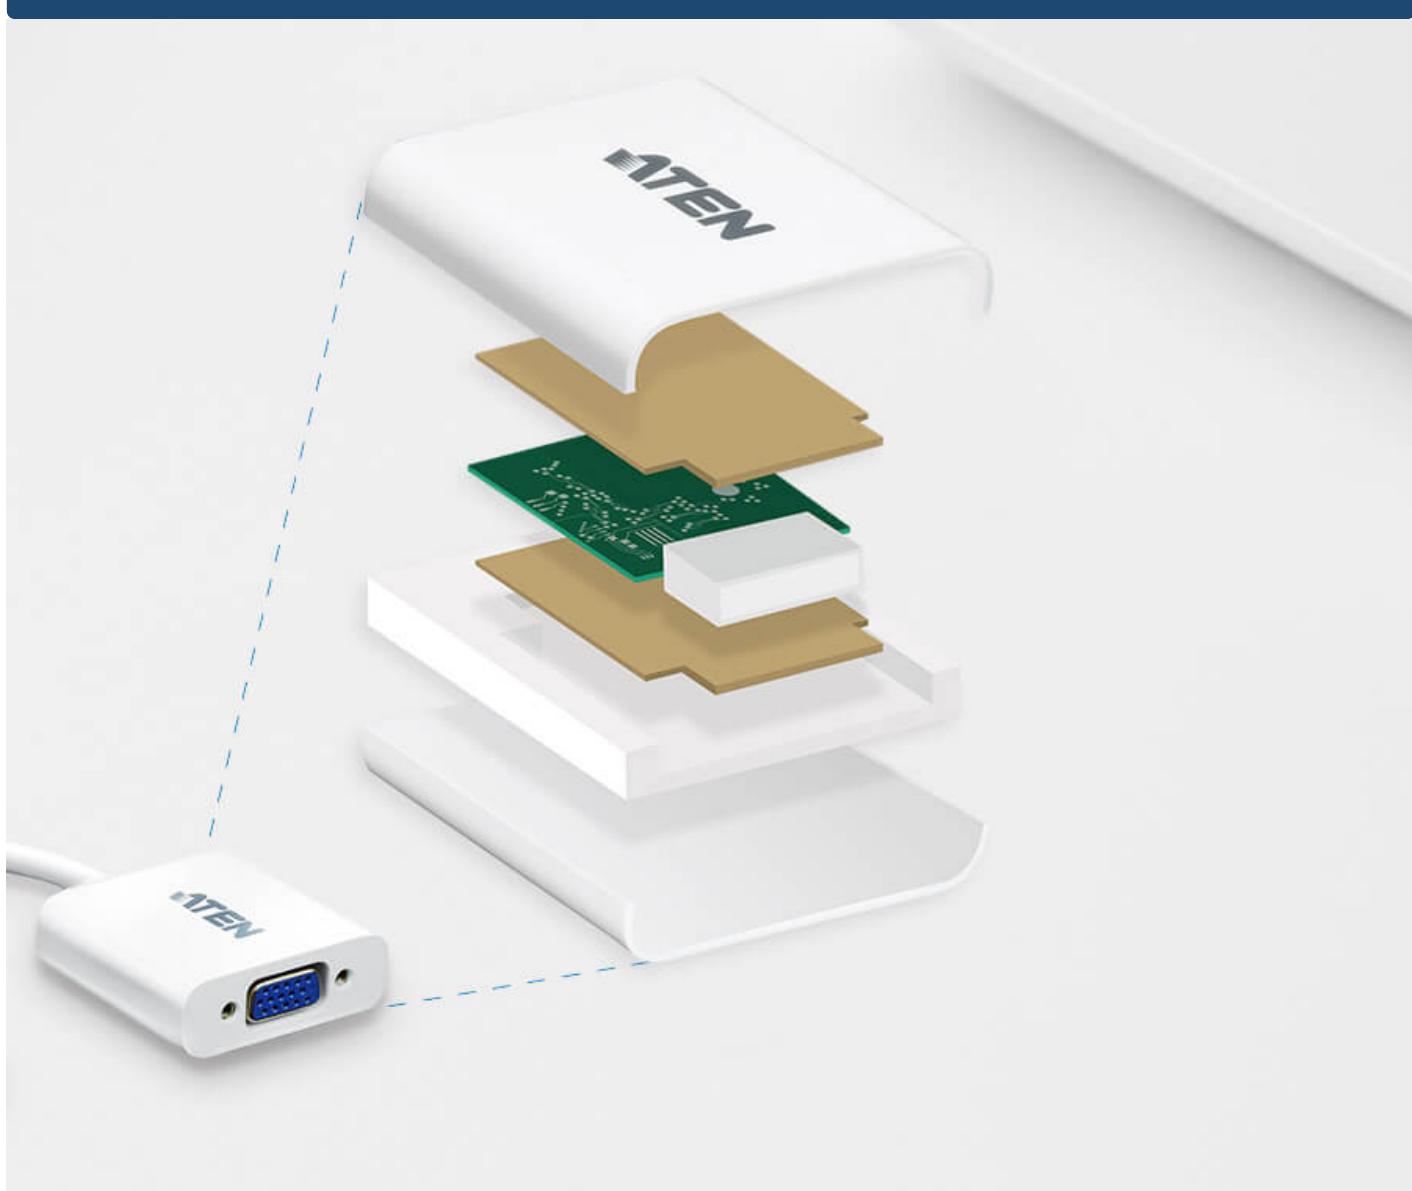
Supports VGA, SVGA, XGA, SXGA, UXGA, and resolutions up to 1920 x 1200 and 1080p, making it highly compatible across devices.



## Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[Contact Sales](#)**Superior Signal Quality**

The internal copper foil shielding protection ensures signal integrity and minimizes external interference, giving you extra reliable and superior quality signals.

[Talk to Our Experts](#)

## TALK TO OUR EXPERTS

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*


Company \*

Email \*

Phone Number \*

- Customer Type \*

Job Title \*

**Resolution****1920 x 1200, 1080P****Video In****DisplayPort****Video Out****HDB-15****Full HD  
1080P****Features**

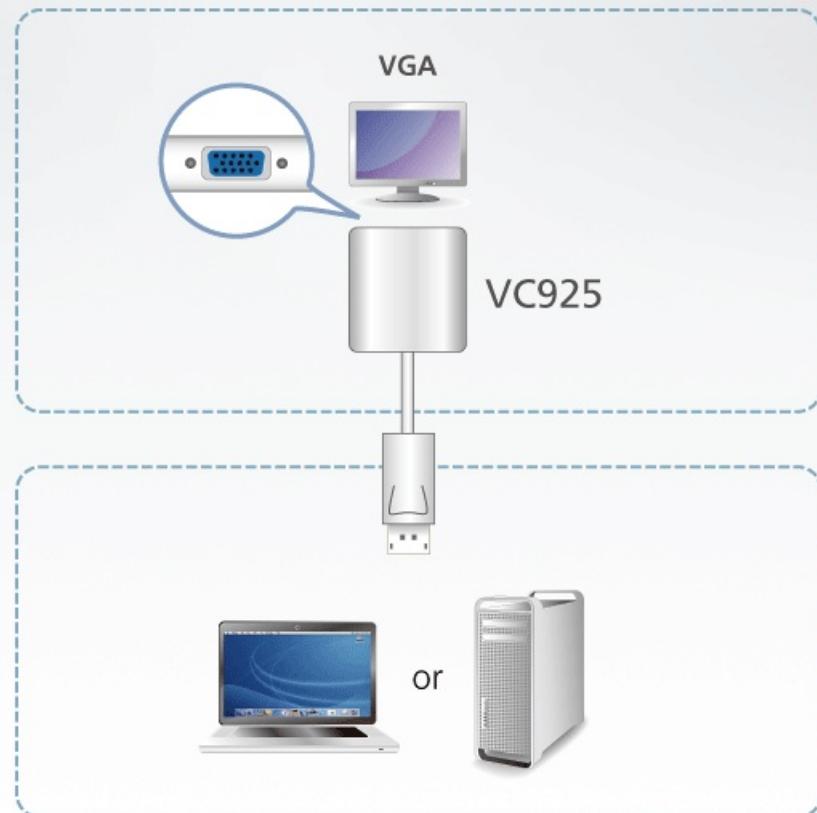
The VC925 is a DisplayPort to VGA adapter, allowing you to connect your device's DisplayPort output to the VGA input of a TV or other display.

The VC925 provide a cost-effective yet high performance signal conversion solution. This adapter is therefore perfect for computers and notebooks, supporting display resolutions of up to WUXGA (1920x1200@60Hz).

- Converts DisplayPort signals to VGA output
- DisplayPort 1.2 compliant
- Supports VGA, SVGA, XGA, SXGA, UXGA and resolutions up to 1920x1200 (PC) / 1080p ([HDTV](#))
- No software or driver installation required

## Specifications

Video Input	
Interfaces	1 x DisplayPort Male (White)
Video Output	
Interfaces	1 x HDB-15 Female (Blue)
Video	
Max. Pixel Clock	165 MHz
Max. Resolution	Input up to 4096 x 2160@60Hz (4:4:4) Output up to 1920 x 1200
Compliance	DP1.2
Environmental	
Operating Temperature	0 - 50 °C
Storage Temperature	-20 - 60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.04 kg ( 0.1 lb )
Dimensions (L x W x H)	18.00 x 4.50 x 1.50 cm (7.09 x 1.77 x 0.59 in.)
Carton Lot	40 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

**Diagram****ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.