

## VE560

DVI Booster (1920 x 1200@30m)



The VE560 DVI Booster allows extending the standard DVI transmission range by 50 m while maintaining high video quality. This allows placing a computer in a safe environment. The VE560 provides a mounting kit which enables you to easily mount the device on a wall. The VE560 is ideal for home theater applications.


### Features

- One unit handles digital video extension and supports long length cable (24 AWG cable) for digital signal transmission.
- Transmission distance of up to 50m.
- Fully compliant with DVI specifications.
- Supports DDWG standard for DVI compliant monitors.
- Supports high resolution: Supports [HDTV](#) resolution of 480p, 720p, 1080i and 1080p & Supports VGA, SVGA, SXGA (1280x1024), UXGA(1600x1200)and WUXGA(1920x1200).
- HDCP compliant.
- Plug and play, easy to install.
- Compact Design.
- Easily connects to different digital video devices (e.g. STB , LCD Monitor , Projector , LCD TVs ).
- Multiplatform support: Windows 2000/XP/ [Vista](#),Linux,Mac and SUN.

**Specifications**

Video Input	
Interfaces	1 x DVI-D Female (White)
Video Output	
Interfaces	1 x DVI-D Female (White)
Video	
Max. Data Rate	4.95 Gbps (1.65 Gbps Per Lane)
Max. Pixel Clock	165 MHz
Compliance	HDCP Compatible
Max. Resolutions / Distance	Up to 1920 x 1200@30m; 1280 x 1024@50m
Connectors	
Power	1 x DC Jack
Power Consumption	DC5V:0.86W:4BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Environmental	
Operating Temperature	0 - 50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.16 kg ( 0.35 lb )
Dimensions (L x W x H)	9.30 x 5.50 x 2.40 cm (3.66 x 2.17 x 0.94 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

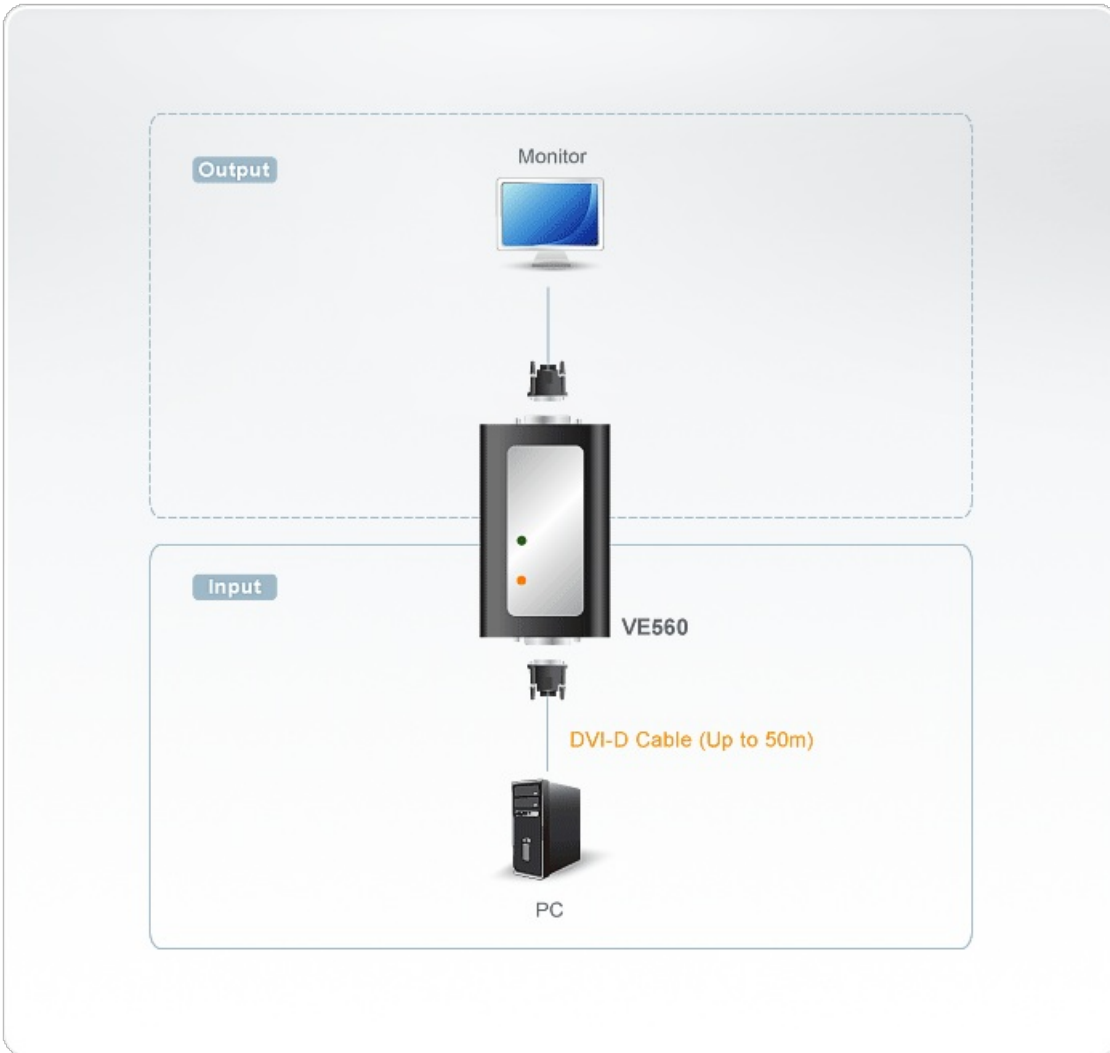

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.