

VE814

HDMI HDBaseT Extender with Dual Output (4K@100m)
(HDBaseT Class A)



ATEN's latest offering delivers high quality videos in dual displays over distance. With the VE814 HDMI Extender, your HDMI displays can be located up to 100 meters away from the HDMI source device. This is made possible using only one Cat 5e/6 cable, which is cheap and easily available. In addition, your video can be streamed using up to three HDMI displays – dual displays connected to the receiving unit (VE814R) and another one to the transmitter unit (VE814T).

The VE814 carries an Ethernet pass-through port for Internet connectivity, making it easy to go online when necessary. It supports RS-232 and IR signaling pass-through, allowing you to control the HDMI source device from the remote unit (VE814R) while also granting access to the HDMI display device from the local unit (VE814T). The VE814 is HDMI (3D, Deep Color, 4K) and HDCP compatible, ensuring superior video quality so that you get the most out of your HDMI displays.



Features

- Extends the distance between HDMI source and HDMI display
- Implements HDBaseT extension technology using only one Cat 5 cable to connect the transmitter and receiver
- Anti-jamming – resists signal interference during high-quality video transmissions using HDBaseT technology
- Supports one local and two remote displays
- Supports two IR channels for bi-directional IR signal transmission
- Extends Ethernet communication with pass-through port
- HDMI (3D, Deep Color, 4kx2k); HDCP Compatible
- Long distance transmission – up to 100 m
- Supports wide screen
- Supports resolutions of up to Ultra HD 4kx2k and 1080p Full HD
- Supports up to 340 MHz bandwidth for high performance video
- EDID Expert – selects the optimum EDID settings for smooth power-up and highest quality display
- RS-232 Serial Port for serial device peripherals, such as touch screens, bar coders scanners, and so on
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15 KV)
- Easy to install – no software required
- Rack Mountable


Specifications

| | | |
|----------|--------|--------|
| Function | VE814R | VE814T |
|----------|--------|--------|

| | | |
|-----------------------------|--|--|
| Video Input | | |
| Interfaces | N/A | 1 x HDMI Type A Female (Black) |
| Impedance | N/A | 100 Ω |
| Max. Distance | N/A | 1.8 m |
| Video Output | | |
| Interfaces | 2 x HDMI Type A Female (Black) | 1 x HDMI Type A Female (Black) |
| Impedance | 100 Ω | 100 Ω |
| Video | | |
| Max. Data Rate | 10.2 Gbps (3.4 Gbps Per Lane) | 10.2 Gbps (3.4 Gbps Per Lane) |
| Max. Pixel Clock | Up to 340 MHz | Up to 340 MHz |
| Compliance | HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC) | HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC) |
| Max. Resolutions / Distance | Up to 4K@70m (Cat 5e/6) / 100m (cat 6a); 1080p@100m *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4) | Up to 4K@70m (Cat 5e/6) / 100m (cat 6a); 1080p@100m *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4) |
| Audio | | |
| Input | N/A | 1 x HDMI Type A Female (Black) |
| Output | 2 x HDMI Type A Female (Black) | 1 x HDMI Type A Female (Black) |
| Control | | |
| RS-232 | 1 x Terminal Block, 3 Pole | 1 x Terminal Block, 3 Pole |
| IR | 2 x Mini Stereo Jack Female (Black) | 2 x Mini Stereo Jack Female (Black) |
| Ethernet | 1 x RJ-45 Female | 1 x RJ-45 Female |
| Connectors | | |
| Power | 1 x DC Jack | 1 x DC Jack |
| Power Consumption | DC5.3V:9.12W:43BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. | DC5.3V:5.65W:26BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | | |
| Operating Temperature | 0-50°C | 0-50°C |

| | | |
|------------------------|---|---|
| Storage Temperature | -20 - 60°C | -20 - 60°C |
| Humidity | 0 - 80% RH, Non-Condensing | 0 - 80% RH, Non-Condensing |
| Physical Properties | | |
| Housing | Metal | Metal |
| Weight | 0.46 kg (1.01 lb) | 0.46 kg (1.01 lb) |
| Dimensions (L x W x H) | 14.17 x 10.30 x 3.00 cm (5.58 x 4.06 x 1.18 in.) | 14.17 x 10.30 x 3.00 cm (5.58 x 4.06 x 1.18 in.) |
| Carton Lot | 5 pcs | 5 pcs |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. | |

Diagram

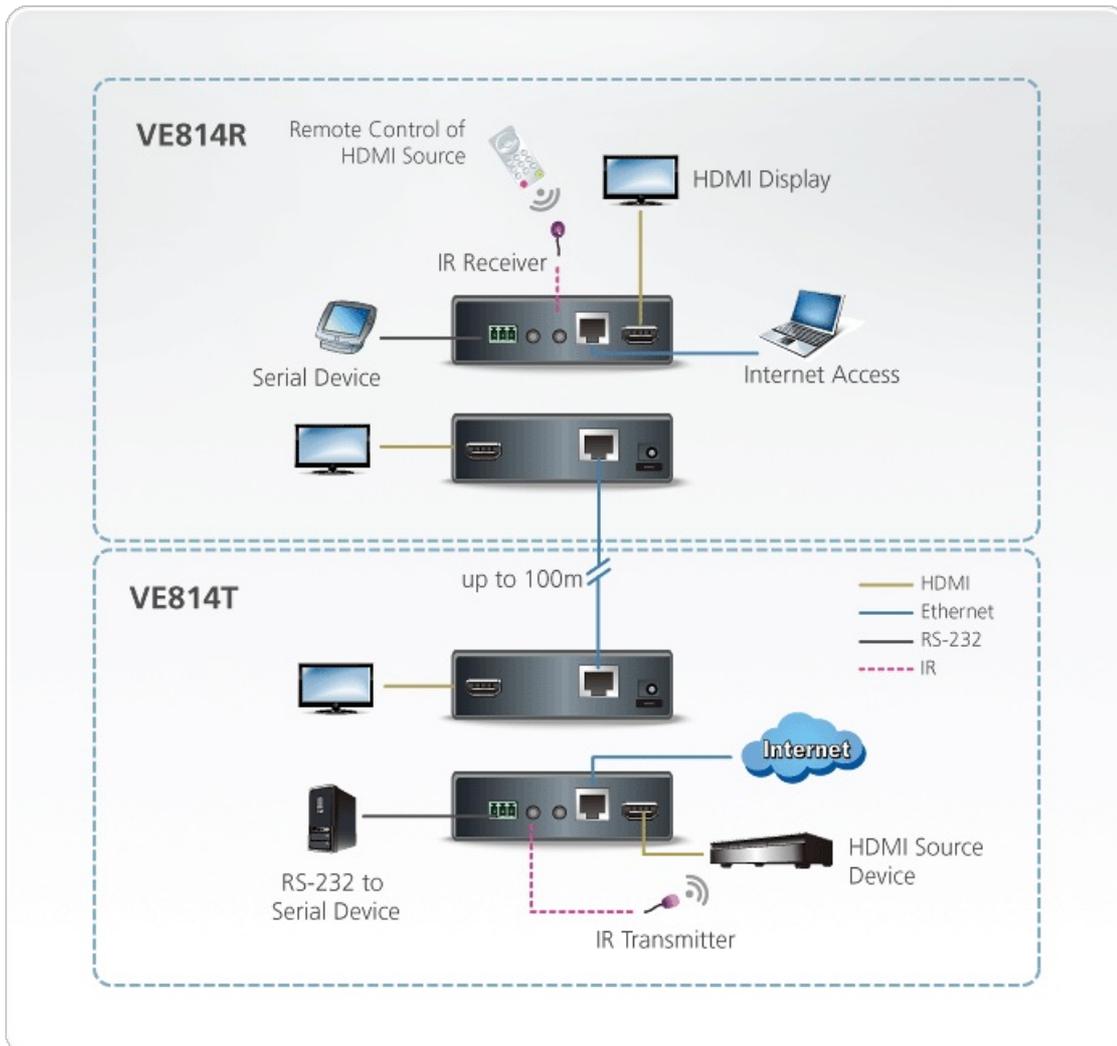



Simply Better Connections

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.