

VM3909H

9 x 9 4K HDMI HDBaseT-Lite Matrix Switch



reddot award 2015
winner interface design



With the rapid development of HDBaseT technology, ATEN has released the new VM3909H HDMI HDBaseT-Lite Matrix Switch. The switch extends uncompressed 4K / Full HD digital video, audio, IR and power via HDBaseT technology through a single Cat 6a cable up to 40/70 meters.

When the VM3909H is combined with [VE805R/VE816R](#) receivers, it supports both ATEN [Seamless Switch™](#) technology and Video Wall functionality. ATEN's exclusive [Seamless Switch™](#) technology employs an FPGA graphics processor to ensure continuous video streaming, real-time control and stable signal transmission across all sources. The Video Wall functionality allows you to create 18 video wall profiles for custom screen layouts through an easy-to-use web interface. The Power over HDBaseT (POH) feature provides an ingenious way to power the [VE802R](#) receivers through the Cat 5e cable without the need of using an additional power supply.

The VM3909H offers flexibility with reliable signal distribution controlled via front-panel pushbuttons, IR, RS-232 and Ethernet (Telnet / Web GUI) connections. It's designed as a functional and integrated control system built for residential, commercial and conference center settings

Model	Max. Distance	IR	4K	Seamless Switch™	Video Wall	POH	Dual View	FrameSync
VE801R	70m*	N/A	•	N/A	N/A	N/A	N/A	N/A
VE802R	70m*	•	•	N/A	N/A	•	N/A	N/A
VE805R (with Scaler)	70m*	•	N/A	•	•	N/A	N/A	N/A
VE816R (with Scaler)	70m*	•	•	•	•	N/A	N/A	•
VE814AR	70m*	•	•	N/A	N/A	N/A	•	N/A
VE601R (DVI)	70m*	N/A	N/A	N/A	N/A	N/A	N/A	N/A
VE901R	70m*	N/A	•	N/A	N/A	N/A	N/A	N/A

*A Cat 6a cable is required to extend the distance up to 70 meters.



Features

- Supports 9 HDMI inputs and mirrored 9 HDMI and HDBaseT outputs
- The mirrored HDMI outputs can be used to verify the corresponding HDBaseT output or as an additional video display*
- HDBaseT Connectivity – connects HDMI displays over a long distance via one Cat 5e/6/6a cable
- HDBaseT Anti-jamming – resists signal interference during high-quality video transmission
- Power over HDBaseT (POH) – supplies power over a long distance from the switch to a receiver over a single Cat 5e/6/6a cable ** / ***
- **Seamless Switch™ Technology – ATEN FPGA engine unifies video formats to provide continuous video streams, real-time switching and stable signal transmissions****
- **Video Wall - allows you to create custom video wall layouts via intuitive web GUI****
- **EDID Expert™ – selects optimum EDID settings for smooth power-up, high-quality display and use of the best video resolution across different screens**
- Multiple Control Methods – system management via front-panel pushbuttons, IR, RS-232 and Ethernet (Telnet / Web GUI) connections
- View and control via ATEN [Video Matrix](#) Control App in a swift and agile way
- Bi-directional IR channel ports support full frequency IR signals from 30 KHz to 60 KHz
- Supports ATEN's LockPro™ HDMI cable lock for securing HDMI cables to the device
- Firmware Upgradeable
- Rack Mountable (VM3909H: 2U Design)

Note:

* The HDMI outputs can't support the Video Wall and [Seamless Switch](#)™ functions.

** The [Seamless Switch](#)™, Video Wall and POH features are only available when used a compatible receiver.

*** The VM3909H can provide up to 15.4 W @ 48 VDC of power per port and 75W of total power ; please ensure that the power consumption of the devices connected to the VM3909H does not exceed this limit.


Specifications


Video Input	
Impedance	100 Ω
Interfaces	9 x HDMI Type A Female (Black)
Max. Distance	1.8 m
Video Output	
Interfaces	9 x HDMI Type A Female (Black) ; 9 x RJ-45 Female
Impedance	100 Ω
Max. Distance	HDMI: up to 15 m HDBaseT (Class B): 4K up to 35 m (Cat 5e/6) / 40 m (Cat 6a); 1080p up to 60 m (Cat 5e/6) / 70 m (Cat 6a)
Video	
Max. Data Rate	10.2 Gbps (3.4 Gbps Per Lane)
Max. Pixel Clock	340 MHz
Compliance	HDMI (3D, Deep Color, 4K); HDCP 1.4 Compatible Consumer Electronic Control (CEC) HDBaseT Compatible
Max. Resolution	Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)
Max. Distance	Up to 70 m
Control	
RS-232	Connector: 1 x DB-9 Female (Black) Baud rate and protocol: Baud Rate: 19200, Data Bits: 8, Stop Bits:1, Parity: No, Flow Control: No
IR Channel	9 x Mini Stereo Jack Female (Black); 30~60 KHz full range transmission
Ethernet	1 x RJ-45 Female
EDID Settings	EDID Mode: Default / Port1 / Remix / Customized
Connectors	
Power	1 x 3-Prong AC Socket
Power	
Maximum Input Power Rating	100-240 VAC; 50-60 Hz; 1.0A

Power Consumption	AC110V:122W:572BTU AC220V:120W:563BTU
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	7.33 kg (16.15 lb)
Dimensions (L x W x H)	43.24 x 38.23 x 8.80 cm (17.02 x 15.05 x 3.46 in.)
Rack Height (U Spaces)	2U
Carton Lot	1 pc
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.


Diagram

Video Wall Setup

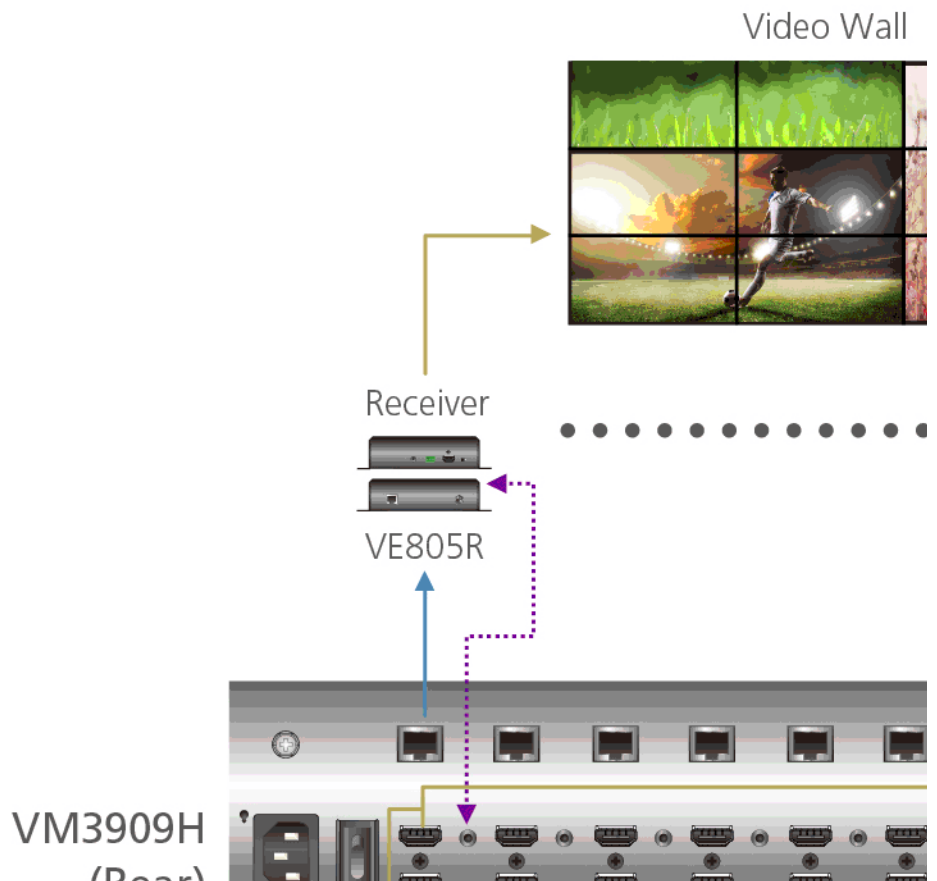

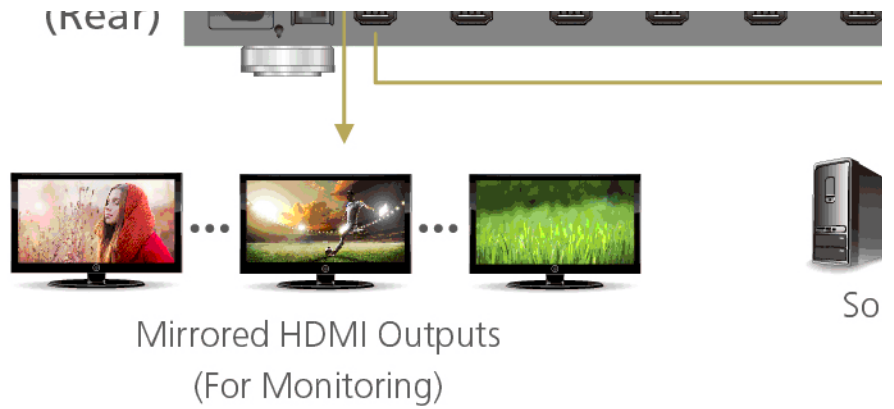

Matrix Video Switching Setup

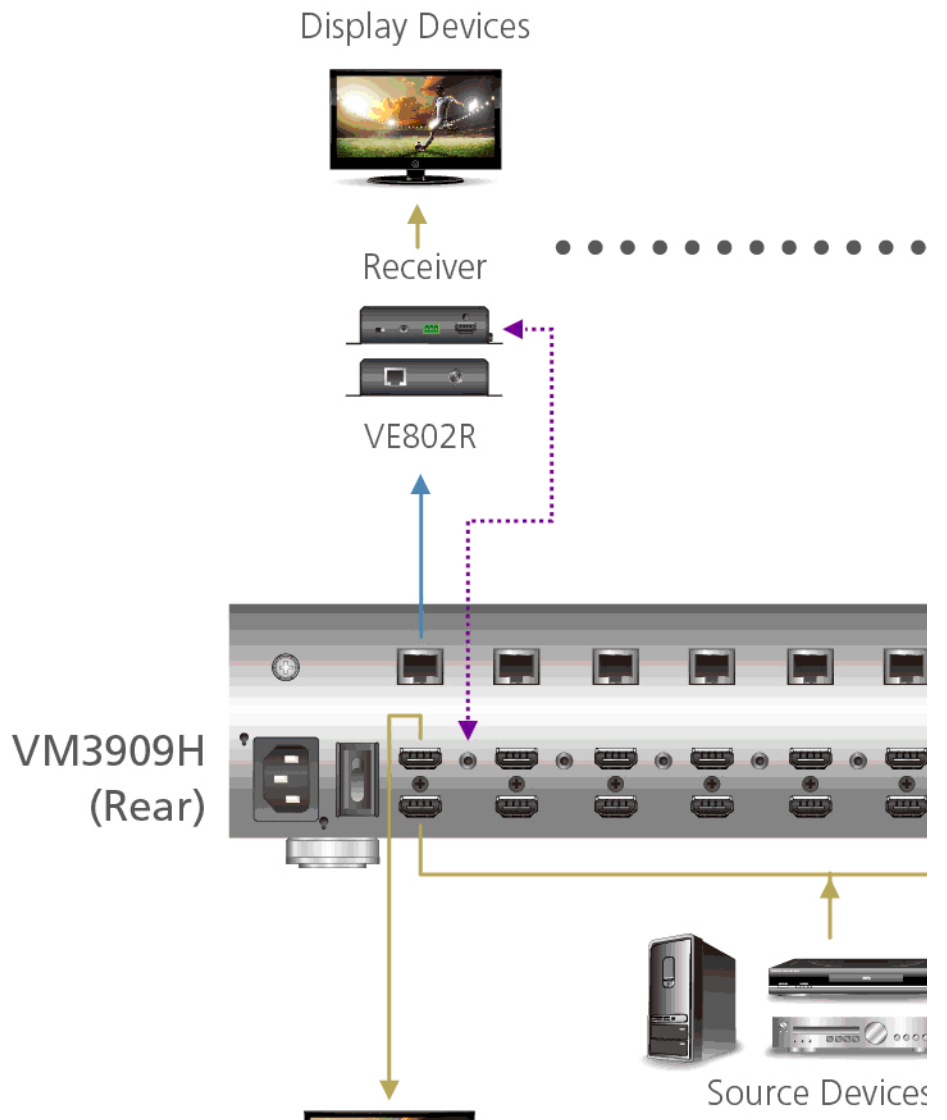



Mirrored HDMI Outputs
(For Monitoring)

VM3909H
(Front)



ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.