

VS132

2-Port VGA Splitter Wall Plate (350MHz)



The VS132 Video Splitter is a boosting device to duplicate the video signal from one source to two outputs, and is ideal for any monitor using analog signals. The VS132 also extends the transmission distance up to 65 m (210 feet) making it excellent for public broadcast systems.

To transmit multiple, high quality, VGA, SVGA, XGA, UXGA, QXGA, WUXGA and multisync video signals over long distances without hassle, the VS132 is your best choice. Other useful applications for the VS132 Video Splitter include:

- Financial – the remote display of stock market information
- Education – the remote display of lectures and lessons to lecture halls and classrooms
- Business – the remote display of addresses to overflow rooms; video conferencing; and demos

Features


- One video input to two video outputs
 - Cascadable to three levels – provides up to 8 video signals
 - Supports up to 350 MHz bandwidth
 - Long Distance Transmission – up to 65 m (210 ft) *
 - Superior video quality – 1920 x 1440
 - DDC, DDC2, DDC2B Compatible (Port 1 only*)
 - Supports VGA, SVGA, XGA, UXGA, QXGA, WUXGA and multisync monitors
- Note: If you connect a DDC type monitor to Video Out 1, all other monitors must be able to support the highest video resolution that the DDC monitor can provide.

* Video content sent over very long distance using a VGA cable might result in slight degradation of the video signal and quality.

Specifications

Video Input	
Interfaces	1 x HDB-15 Male (Blue)
Impedance	75 Ω
Max. Distance	1.8 m
Video Output	
Interfaces	2 x HDB-15 Female (Blue)
Impedance	75 Ω
Video	
Max. Bandwidth	350 MHz
Max. Resolution	Up to 1920 x 1440
Max. Distance	Up to 65 m
Connectors	
Power	1 x DC Jack
Power Consumption	DC5.3V:0.42W:2BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.19 kg (0.42 lb)
Dimensions (L x W x H)	10.36 x 7.90 x 2.82 cm (4.08 x 3.11 x 1.11 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

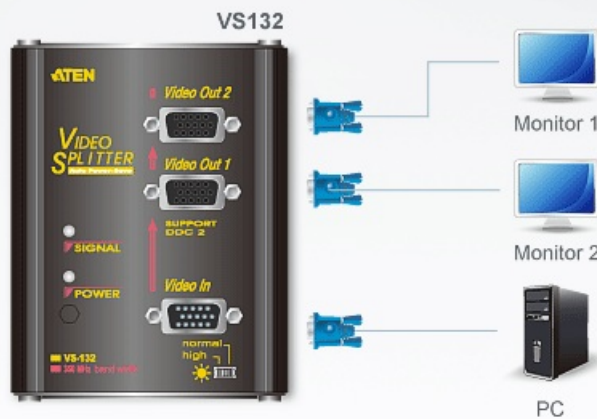

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.