

## VS182A

2-Port 4K HDMI Splitter



# One HDMI Source. Dual 4K Distribution.



**VS182A** 2-Port 4K HDMI Video Splitter

The VS182A is a 2-port video splitter that mirrors 4K audiovisual content from a single HDMI source to two HDMI displays simultaneously. It's an ideal addition to any AV setup where reliable content sharing is essential – such as home entertainment systems, SOHO studios, meeting rooms, classrooms, and more.

### One Source, Dual Video Distribution

The splitter accepts input from an HDMI device – such as a PC, laptop, media player, and more – and streams the AV content to up to two HDMI-enabled displays, making it suitable for both consumer and professional applications.



#### Pristine 4K Clarity

The VS182A supports Ultra HD resolutions up to 4K (3840×2160 @ 30Hz, 4:4:4), delivering crystal-clear detail.

#### Flexible Long-Distance Cabling

The VS182A allows flexible cabling, with connections up to 3 meters (using [2L-7D03H](#)) to an HDMI source and up to 15 meters (using [2L-7D15H](#)) to each HDMI display, delivering data rates of up to 10.2 Gbps.




#### Applications

The video splitter is ideal for applications that require seamless distribution of pristine audiovisual content across multiple displays, ensuring a stunning viewing experience in any AV setup.

- 1.
- 2.
- 3.
- 4.
- 5.






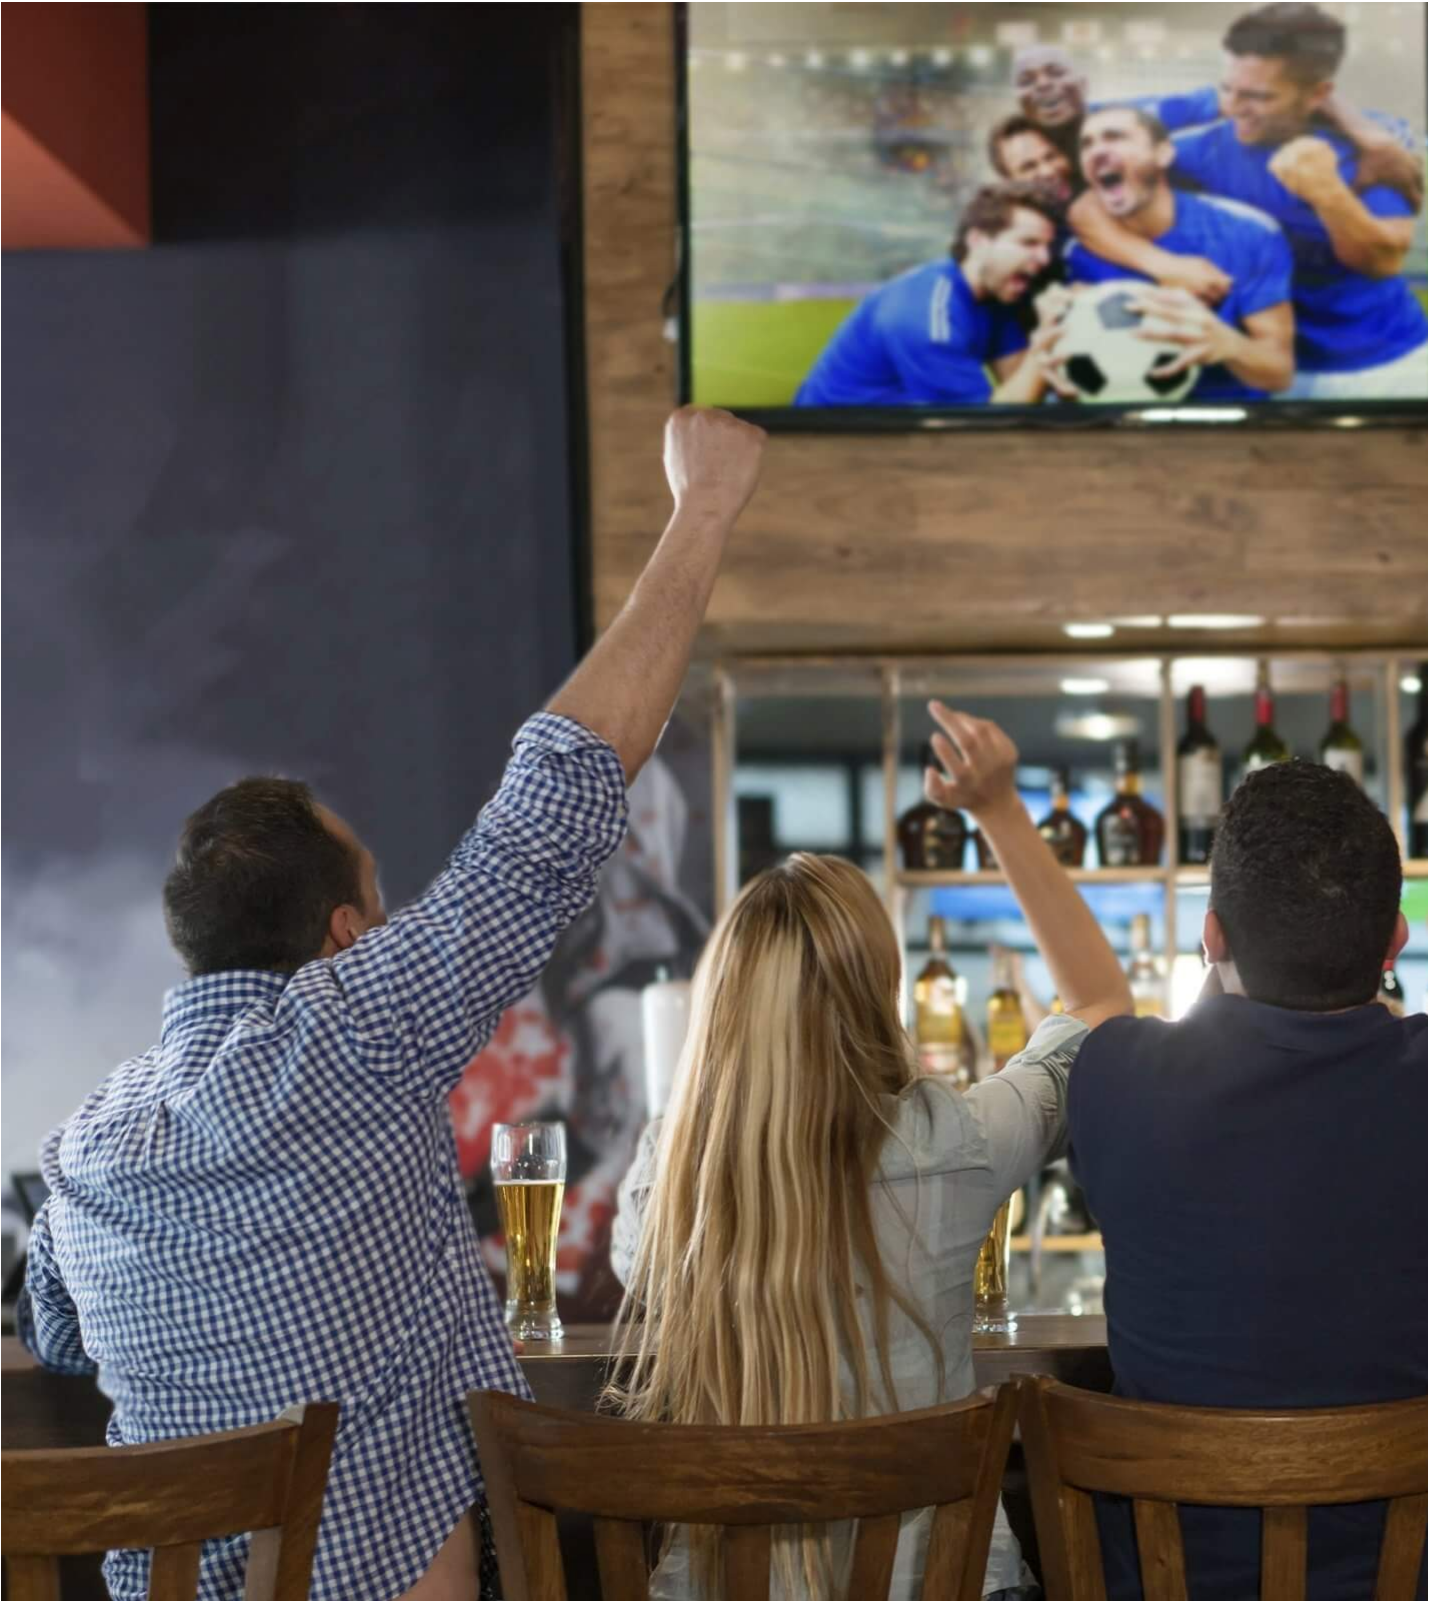

Sports Bar






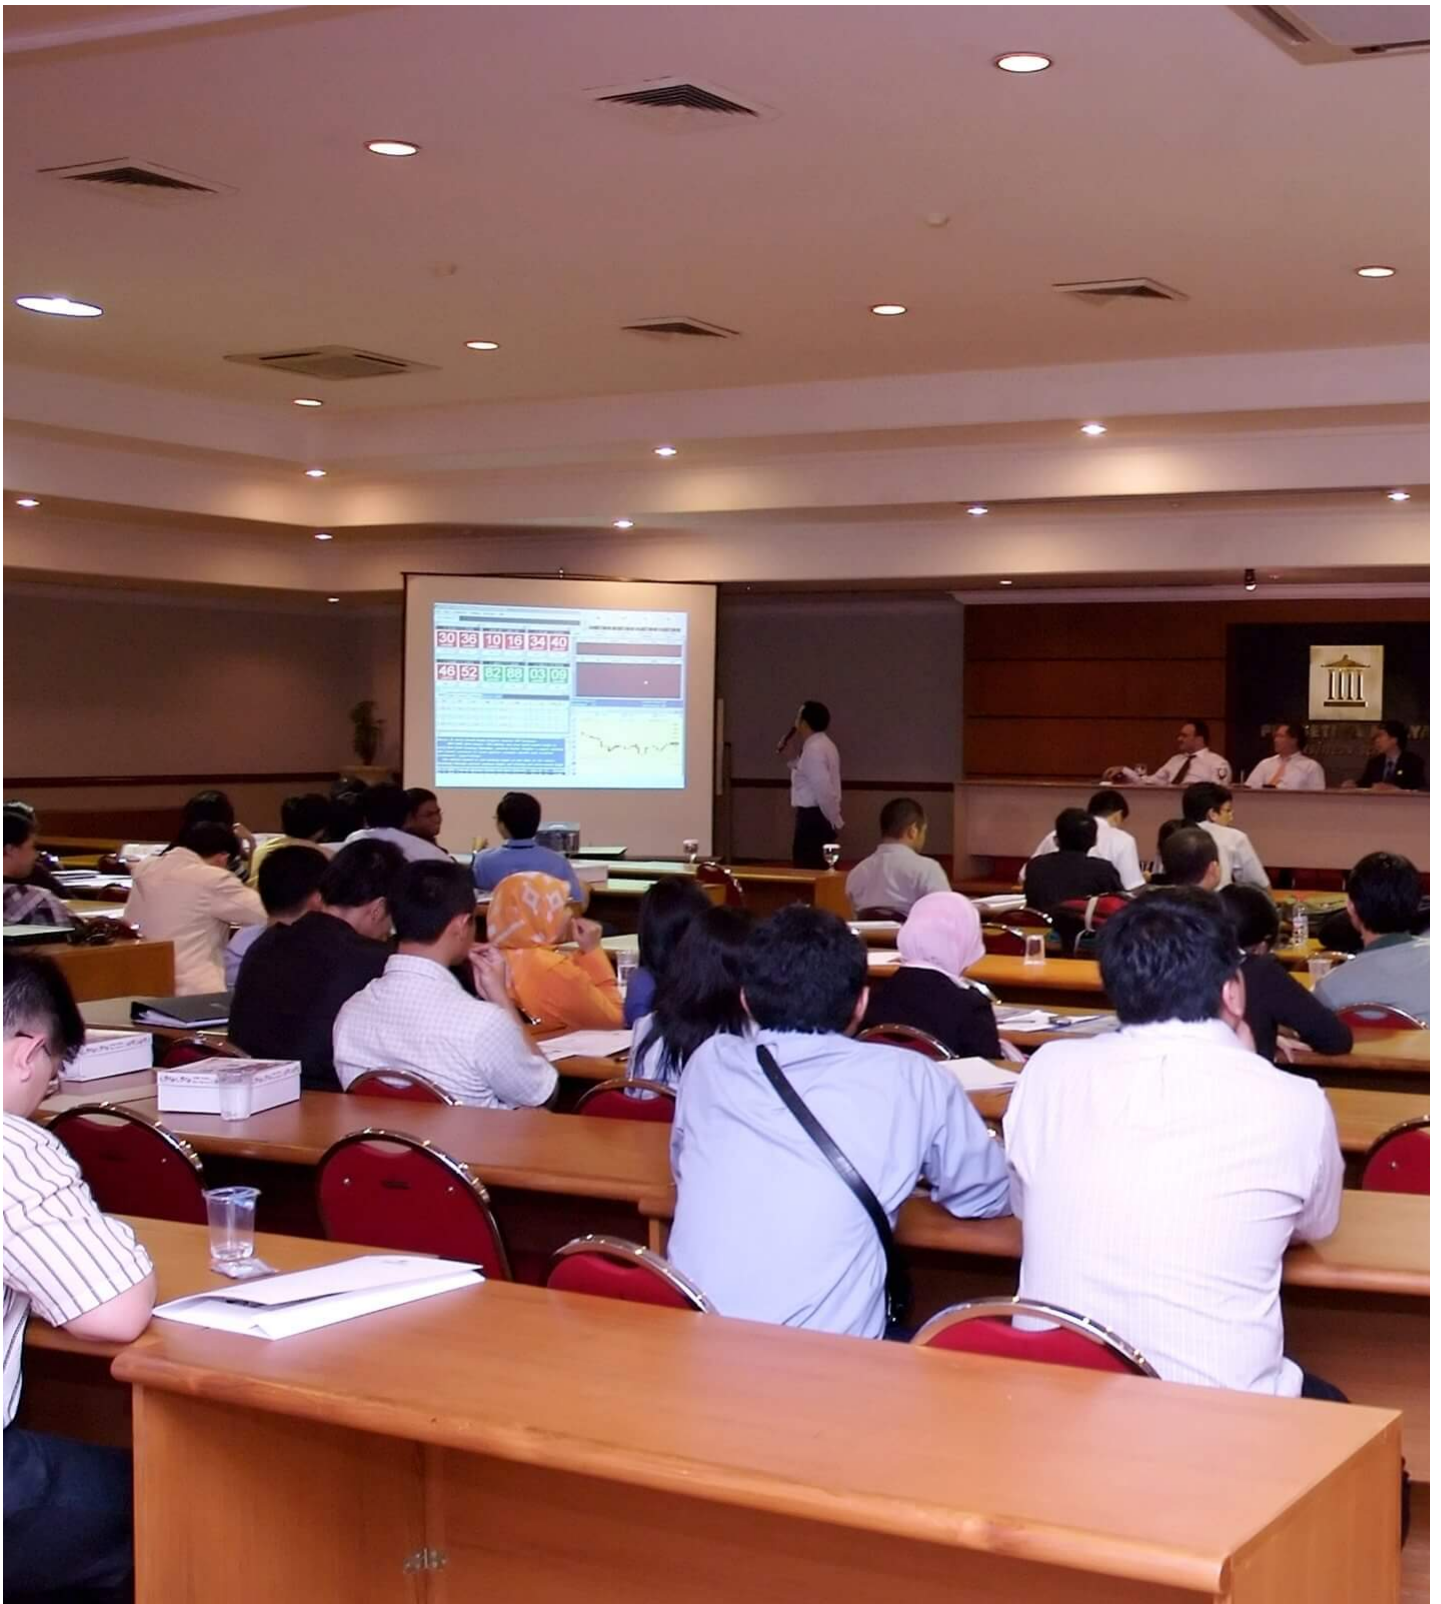

Lecture Hall



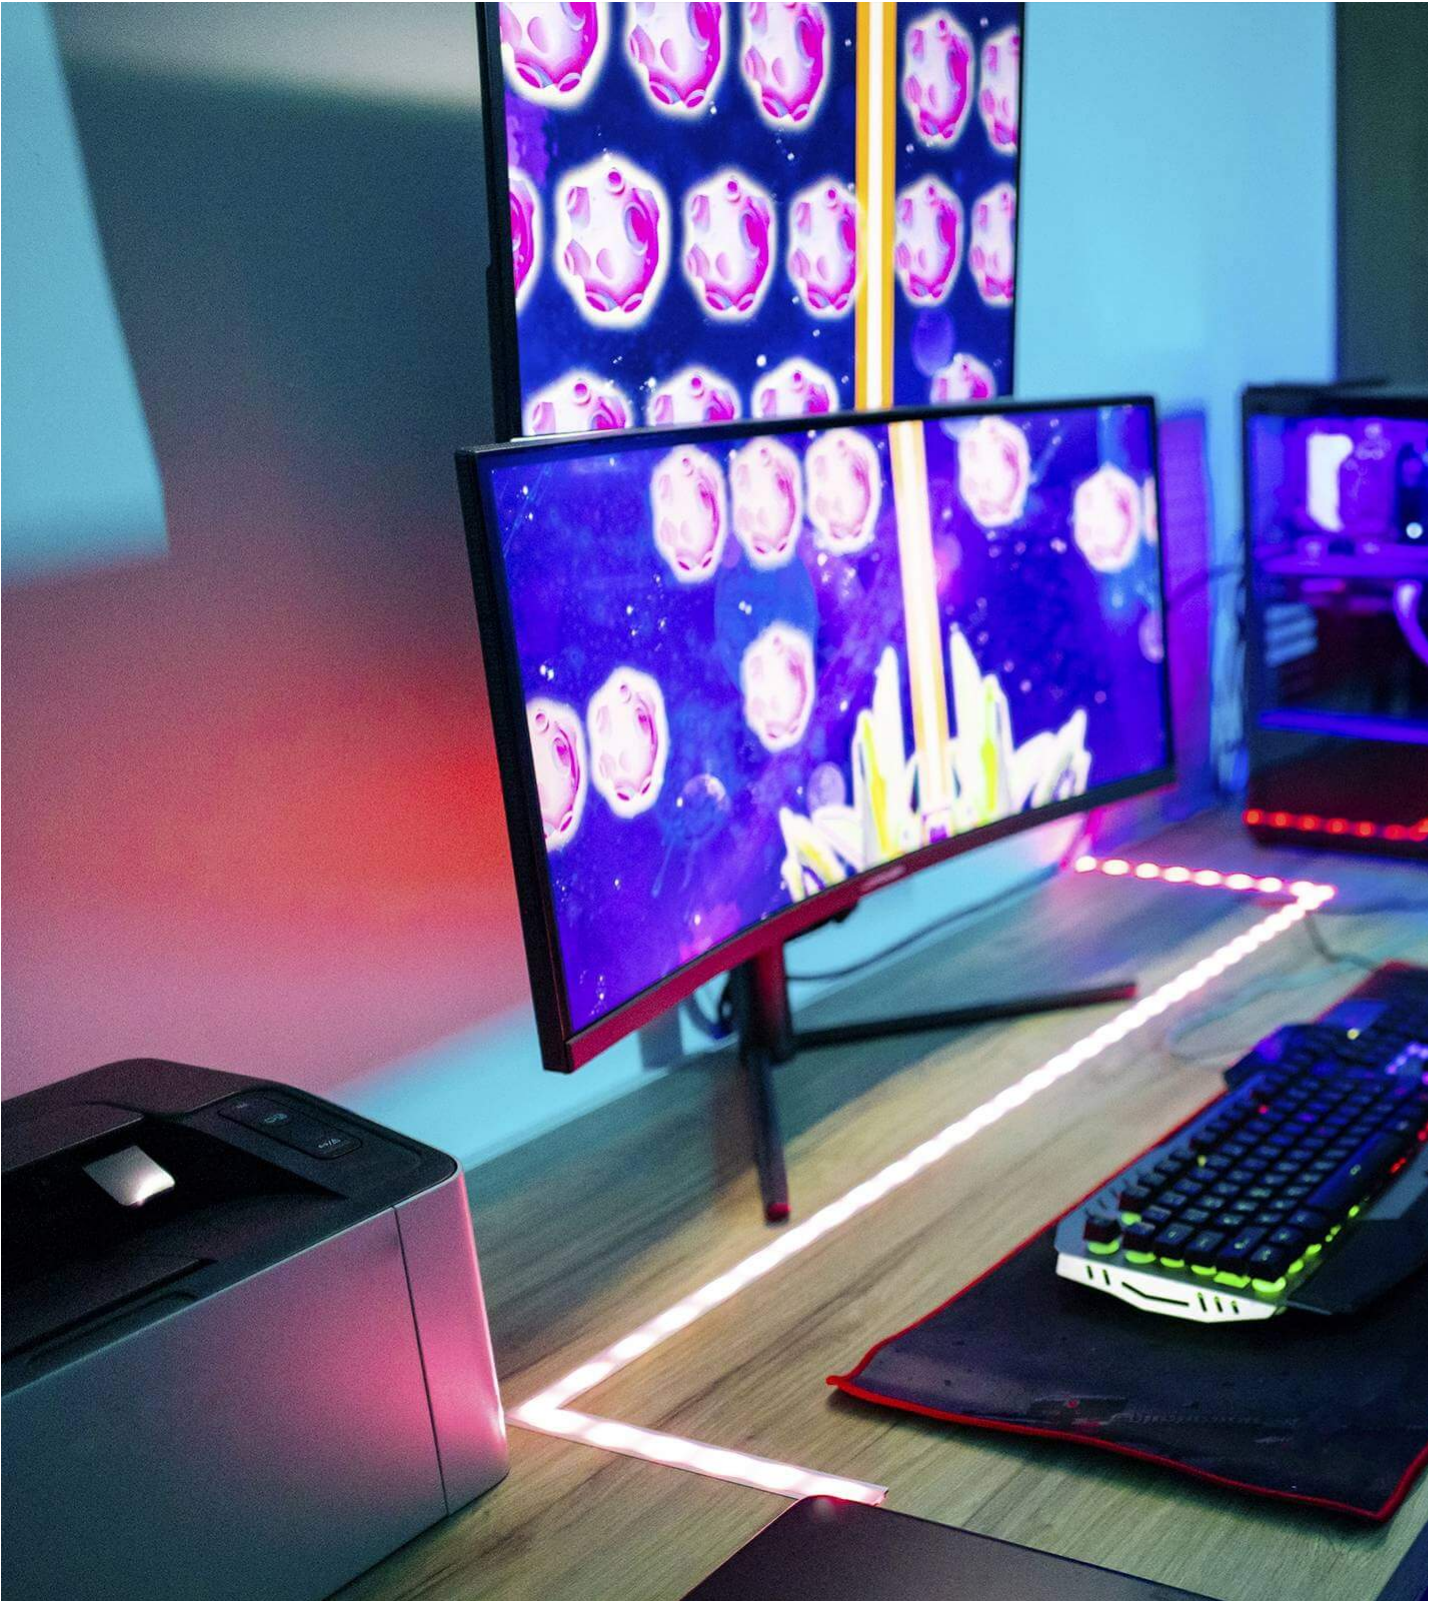

Live Game Streaming

[Previous](#) [Next](#)


Commitment to Best Quality

Each product is rigorously tested under diverse environmental conditions to ensure high-quality, reliable, and cost-effective performance for our customers.






Temperature & Humidity Test

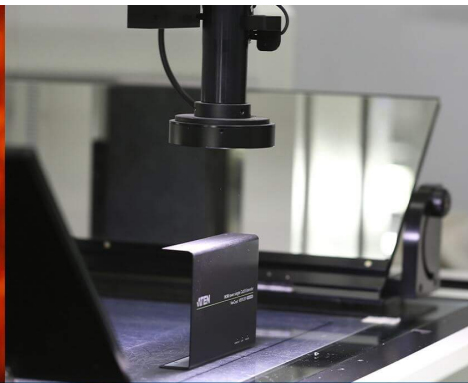

Reliability Test

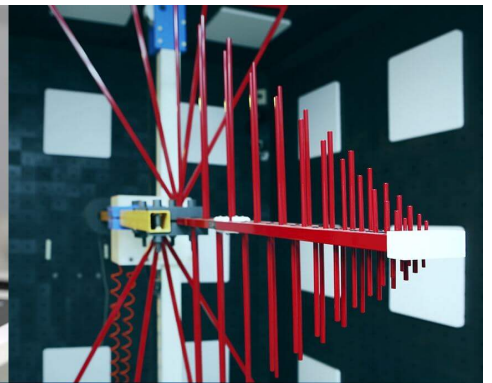

Electrical Safety Test



ISO9001:2015 & ISO14000



Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

<input type="text"/>	First Name *
<input type="text"/>	Last Name *
<input type="text"/>	- Country *
<input type="text"/>	Company *
<input type="text"/>	Email *
<input type="text"/>	Phone Number
<input type="text"/>	- Customer Type *
<input type="text"/>	Job Title *





#### Features

The VS182A HDMI Splitter is the perfect solution for anyone who needs to send one source of digital high definition video to two displays at the same time. It supports all HDMI-enabled equipment, such as DVD players, satellite set-top boxes and all HDMI displays.

The VS182A HDMI Splitter is HDCP (High Bandwidth Digital Content Protection) compliant, making it effective for use with all HDMI displays in home theater applications, as well as in corporate, educational and commercial settings.

- Connects one HDMI source to two HDMI displays at the same time
- HDMI (3D, Deep Color, 4K); HDCP Compatible
- Supports resolutions of up to Ultra HD 4k x 2k
- Supports Dolby True HD and DTS HD Master Audio
- Long distance transmission – up to 15 m (24 AWG)
- Supports max. data rate of 10.2 Gbps
- Plug-and-play – no software installation required


Note: Long distance transmission up to 20m (with ATEN [2L-7D20H](#))

#### Specifications

Video Input	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	3m @3840x2160@30Hz (4:4:4)
Video Output	
Interfaces	2 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	15m @3840x2160@30Hz (4:4:4)
Video	
Max. Data Rate	10.2 Gbps (3.4 Gbps Per Lane)
Max. Pixel Clock	340 MHz
Compliance	HDMI (3D, Deep Color, 4K); HDCP Compatible
Max. Resolution	Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)
Audio	
Input	1 x HDMI Type A Female (Black)
Output	2 x HDMI Type A Female (Black)
Connectors	
Power	1 x DC Jack
Environmental	
Operating Temperature	0-50 °C
Storage Temperature	-20 - 60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.31 kg ( 0.68 lb )
Dimensions (L x W x H)	12.50 x 8.00 x 2.50 cm (4.92 x 3.15 x 0.98 in.)
Carton Lot	20 pcs
Power Consumption	DC5.3V:3.12W:15BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.



Diagram

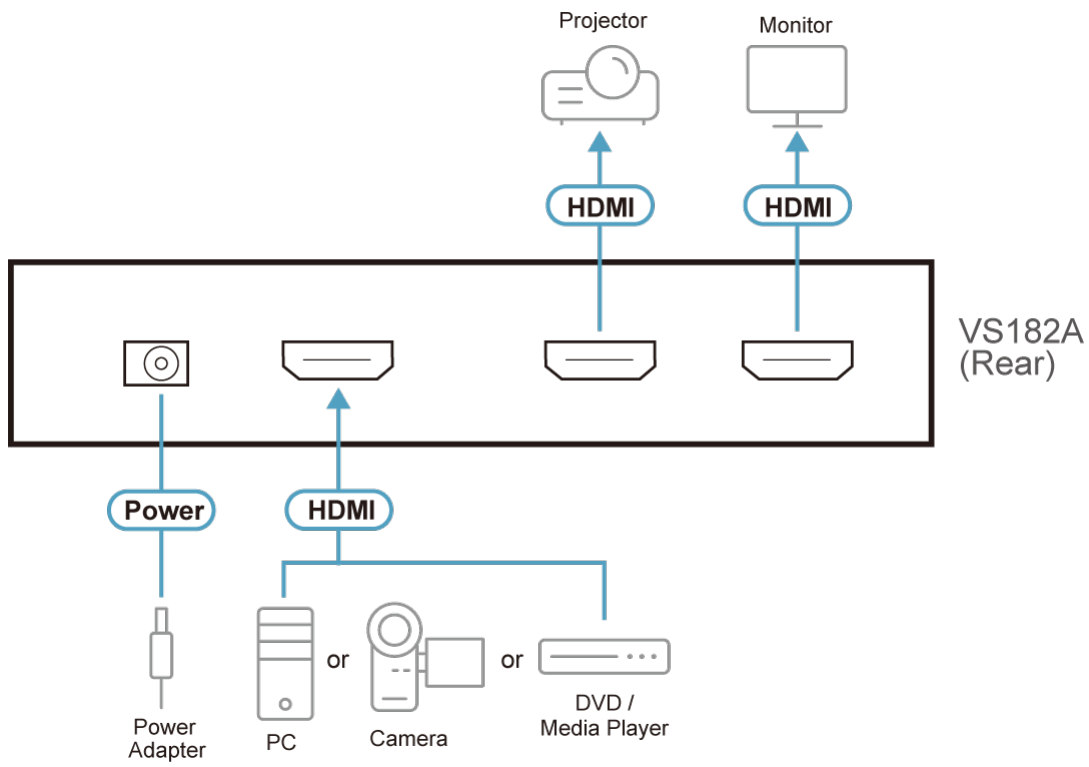

**ATEN International Co., Ltd.**

3F., No. 125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.