

## VS0401

4-Port VGA/Audio Switch




The VS0401 4-Port VGA Switch with Audio allows you to connect four audio/video source computers to a single monitor or projector with full audio and quickly switch between the devices for use.

VS0401 built-in bi-directional RS-232 serial port for high-end system control, and advanced RS-232 control. With the ability to use high-end serial control devices via RS-232 commands allows the VS0401 to be controlled by secondary systems with advanced functions such as; port switching, auto switching, front panel pushbutton lock, and Power on Detection.

The VS0401 is perfect for the meeting room, media centers, class rooms, or any presentation environment requiring multiple audio/video sources to be accessed on a single display.

**RS-232  
Control**

**VDS** Video  
DynaSync



**Video In**

**HDB-15**



**Video Out**

**HDB-15**



**Stereo  
Audio**

## Features

- Displays the video output of four computers on a single monitor or projector
- Quick and easy switching between VGA/Audio sources via front panel pushbuttons, RS-232, or IR remote control
- Superior video quality – up to 1920 x 1440
- Long-distance transmission – up to 30 m \*
- Supports VGA, SVGA, UXGA, WUXGA and multisync monitors
- [Video DynaSync™ – Exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports](#)
- Built-in bi-directional RS-232 serial port for high-end system control \*\*
- RS-232 Control:
  - Power On Detection – if one VGA source is powered off, the VS0401 will automatically switch to the next powered-on source
  - [Auto Switching](#) – sets the priority for auto switching to a connected port
  - [Pushbutton Lock](#) – locks use of the front panel pushbuttons
- Supports stereo audio
- DDC compatible
- Supports up to 300MHz bandwidth for optimal video quality
- LED indication of power status and source device
- All-metal casing provides durability and protection
- Plug-and-play – no software installation required

\* Video content sent over very long distance using a VGA cable might result in slight degradation of the video signal and quality.


\*\* Note: The VS0401 AP and GUI operation instructions can be downloaded from the ATEN website ([www.aten.com](http://www.aten.com))

## Specifications

|                 |                                                                                                                                            |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Video Input     |                                                                                                                                            |
| Interfaces      | 4 x HDB-15 Male (Blue)                                                                                                                     |
| Impedance       | 75 $\Omega$                                                                                                                                |
| Max. Distance   | 1.8 m                                                                                                                                      |
| Video Output    |                                                                                                                                            |
| Interfaces      | 1 x HDB-15 Female (Blue)                                                                                                                   |
| Impedance       | 75 $\Omega$                                                                                                                                |
| Max. Distance   | 30 m                                                                                                                                       |
| Video           |                                                                                                                                            |
| Max. Bandwidth  | 300 MHz                                                                                                                                    |
| Max. Resolution | Up to 1920 x 1440                                                                                                                          |
| Max. Distance   | Up to 30 m                                                                                                                                 |
| Audio           |                                                                                                                                            |
| Input           | 4 x Mini Stereo Jack Female (Green)                                                                                                        |
| Output          | 1 x Mini Stereo Jack Female (Green)                                                                                                        |
| Control         |                                                                                                                                            |
| RS-232          | Connector: 1 x DB-9 Female (Black)<br>Baud Rate and Protocol:<br>Baud Rate: 19200, Data Bits: 8, Stop Bits:1, Parity: No, Flow Control: No |
| IR              | 1 x Mini Stereo Jack Female (Black)                                                                                                        |
| Connectors      |                                                                                                                                            |

|                        |                                                                                                                                                                                                                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power                  | 1 x DC Jack                                                                                                                                                                                                                                                                                              |
| Power Consumption      | DC5.3V:0.47W:2BTU/h<br><br>Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul> |
| Environmental          |                                                                                                                                                                                                                                                                                                          |
| Operating Temperature  | 0 - 50°C                                                                                                                                                                                                                                                                                                 |
| Storage Temperature    | -20 - 60°C                                                                                                                                                                                                                                                                                               |
| Humidity               | 0 - 80% RH, Non-Condensing                                                                                                                                                                                                                                                                               |
| Physical Properties    |                                                                                                                                                                                                                                                                                                          |
| Housing                | Metal                                                                                                                                                                                                                                                                                                    |
| Weight                 | 0.66 kg ( 1.45 lb )                                                                                                                                                                                                                                                                                      |
| Dimensions (L x W x H) | 20.00 x 7.61 x 4.40 cm<br>(7.87 x 3 x 1.73 in.)                                                                                                                                                                                                                                                          |
| Carton Lot             | 5 pcs                                                                                                                                                                                                                                                                                                    |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                                                                          |

## Diagram

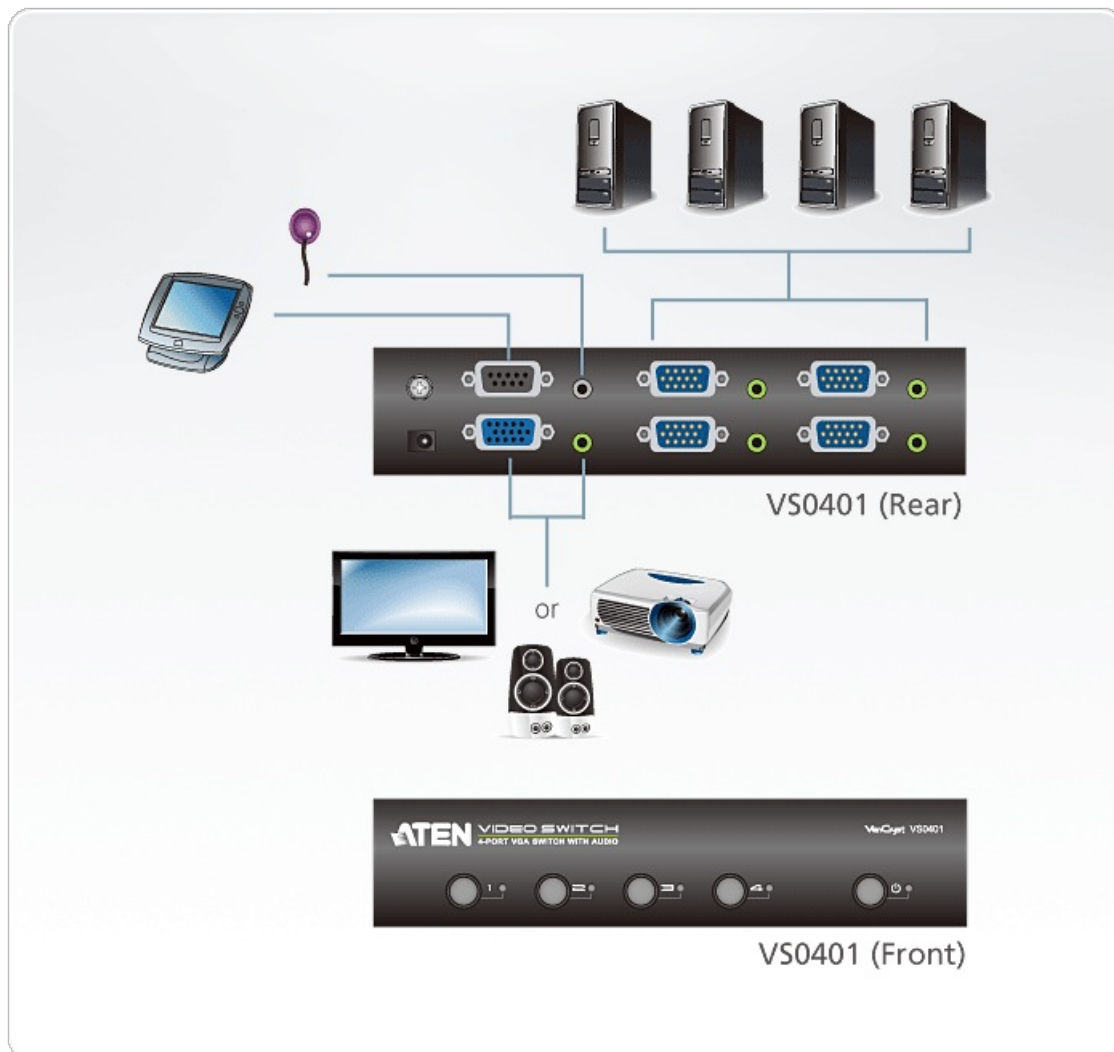

### ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.