

UH3231

USB-C Dual-DisplayPort Mini Dock



The ATEN UH3231 is a [USB-C](#) Dual-DisplayPort Mini Dock which transforms your [USB-C](#) device to a dual monitor workstation. It's compliant with the latest USB 3.2 Type-C specifications and supports a variety of video converters that can convert HDMI, DVI or VGA outputs for use in dual display mode. The UH3231 can route video from the source device to two DisplayPort monitors, splitting the video transmission for a dual-view display via a single cable while maintaining a high quality resolution up to 1080p.

The UH3231 [USB-C](#) Dual-DisplayPort Mini Dock uses [USB-C](#) connections to create high-speed and reliable data transfers between a laptop or computer with the ability to connect up to 128 additional peripherals, including Dual DP and USB 3.0 devices. The UH3231's slim and light design makes it ideal to maximize your workspace and travel with for business on the go.

Meet the ATEN Docking Series




Features

- USB 3.2 Gen1 compliant
 - Connects a computer to two DisplayPort monitors with Dual-View output
 - Supports 4K (UHD) resolutions via single display output
 - Supports dual-display video output up to 1920 x 1080 simultaneously*
 - USB 3.2 Gen1 port with data transfer rates up to 5 Gbps
 - Supports variety of video converters via Dual mode DisplayPort standard
 - Plug and Play – no drivers or external power adapter needed
 - Works with all major operating systems: Windows®, OS X®, Android and iPad Pro
- * With Intel 7th- Generation Core Processor (Kaby Lake) and above. For Dual-View to work, a computers graphics card must support [MST](#) technology. Mac computers, Android and iPad Pro only support a single-view output

Specifications

Computer Connections	1
Connectors	
Computer	1 x USB-C Female (Black)
Device	1 x USB 3.2 Gen1 Type A Female (Blue)
Video Output	2 x DisplayPort Female (Black)
LEDs	
Power	1 (Blue/Orange)
Video Resolution	Single-View: DisplayPort - 3840*2160@30* Dual-View:** DisplayPort - 1920*1080@60* ** With Intel 7th-Generation Core Processor (Kaby Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html For video output to work through a USB-C port, device with DP Alt Mode support is required. The UH3231 supports DP++ standard for using optional active/passive video adapter to convert DP signals to DVI/HDMI. ** For Dual-View to work, a computer's graphics card must support MST technology. Mac computers only support a single-view output.
Power Consumption	DC5V:0.81W:23BTU
Package Contents	1 x 1m USB-C Cable
Environmental	
Operating Temperature	0–40°C
Storage Temperature	-20–60°C
Humidity	0–80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.10 kg (0.22 lb)
Dimensions (L x W x H)	9.37 x 9.30 x 2.68 cm (3.69 x 3.66 x 1.06 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

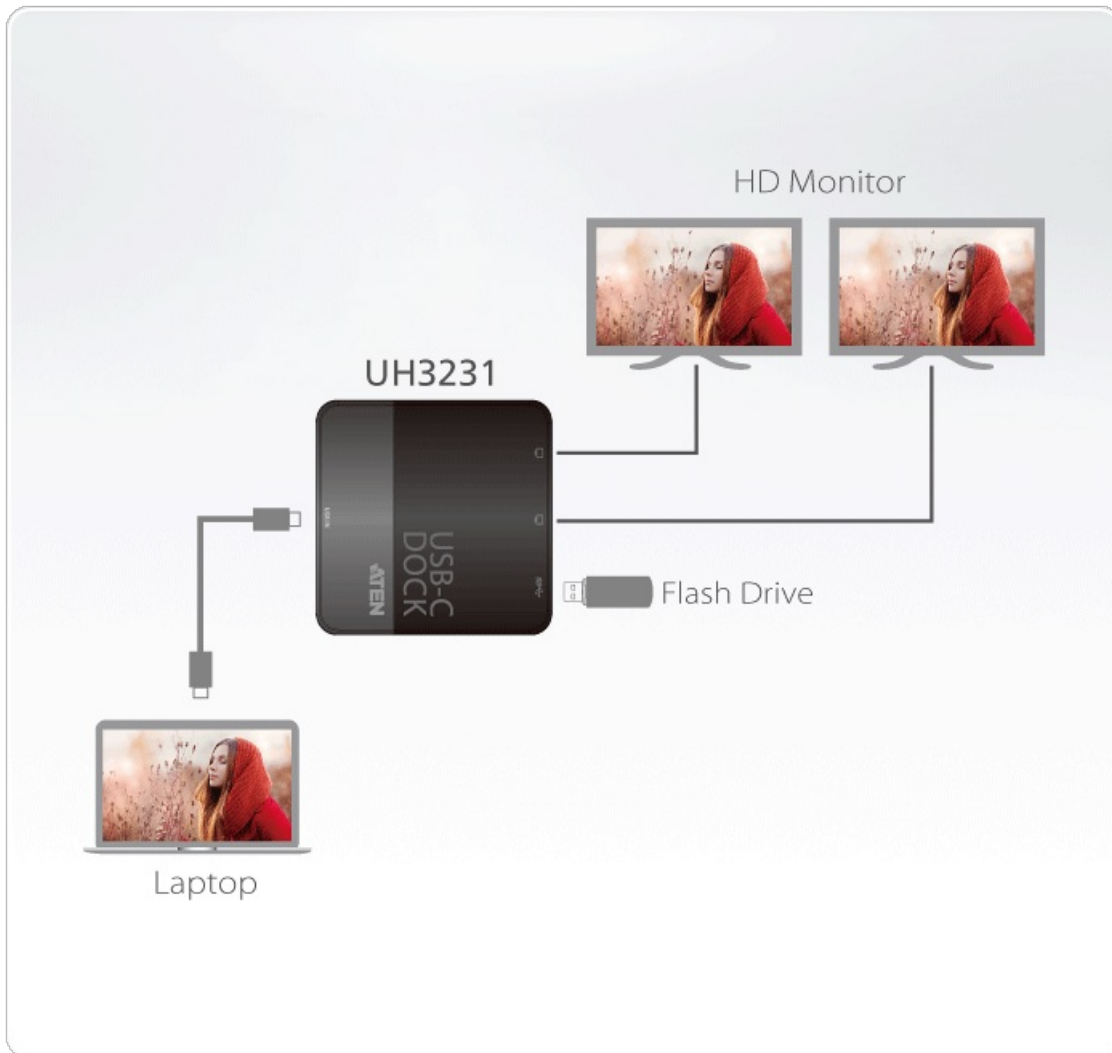

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.