


## **UH3238**

USB-C Travel Dock with Power Pass-Through





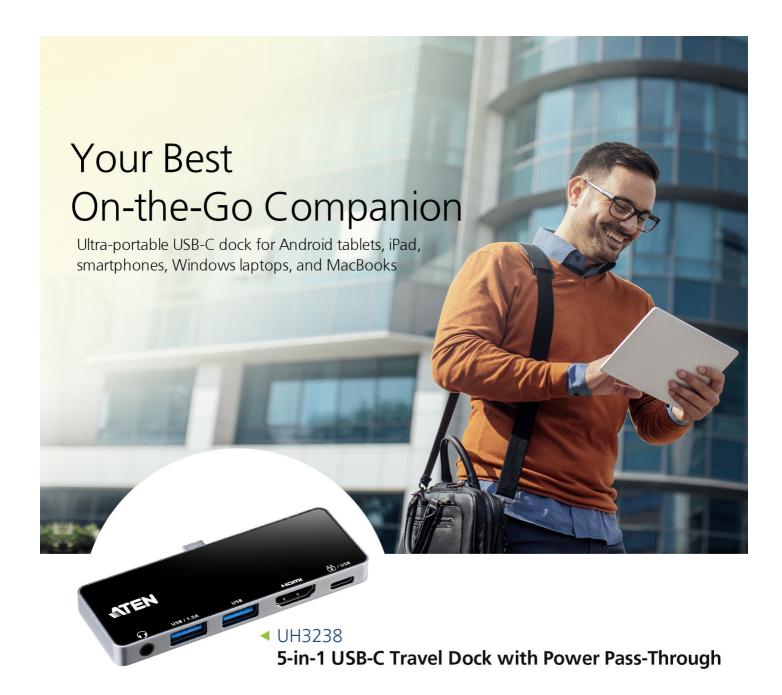

#### 5-in-1 Ultra-Portable Travel Dock

The ATEN UH3238 USB-C Travel Dock provides an uncompromising mobile experience, giving all your USB-C mobile devices portable access to multiple media devices. With its pocket size, you can travel lighter with this ultra-portable dock and make the most of your mobile devices.






## Universal Design. Made for USB-C Mobile Devices

The Travel Dock is specifically designed for any USB-C device, such as an Android tablet, iPad, smartphone, Windows laptop, and MacBook with universal compatibility.



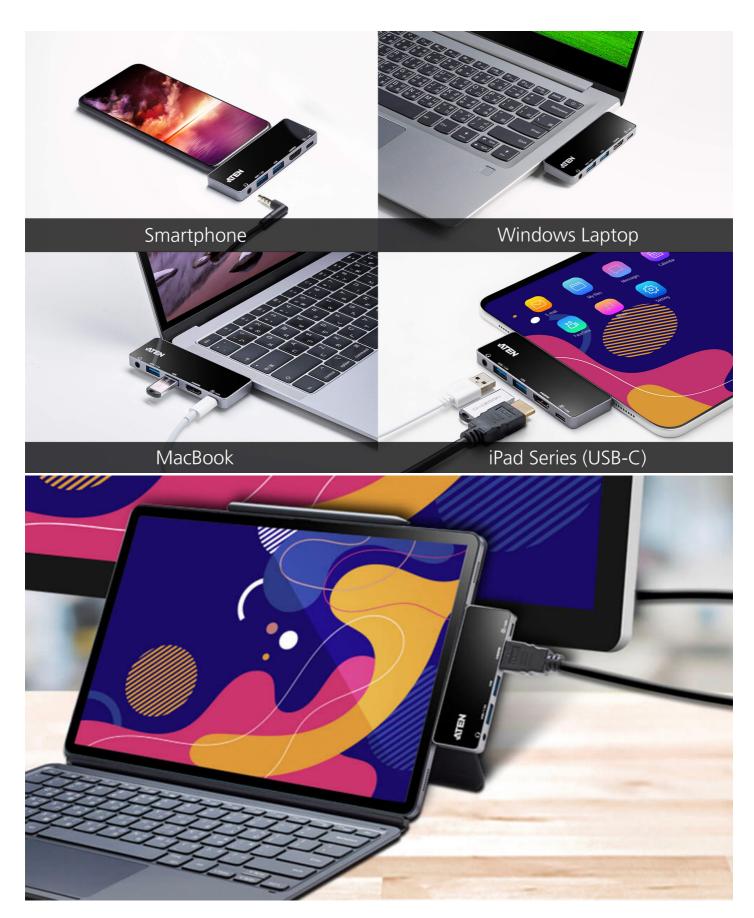



### Stunning 4K@60Hz HDMI Display

Extends your viewing workspace with a single monitor for crystal-clear resolution, up to 4K@60Hz, for on-the-go presentations, conference calls, and video streaming.



### Restores 3.5mm Audio Jack

The 3.5mm audio jack restores wired headphones connectivity to your mobile devices. You can once again enjoy high-quality audio with your wired headphones.






Type-C 92W PD and 5Gbps Data Transfer



The USB-C port supports 92W power delivery providing full-speed pass-through charging for your Windows laptop, MacBook, Android tablet, iPad Pro, or smartphone, while also supporting standard 5Gbps data transfer.

### One Travel Dock for Massive Expansion

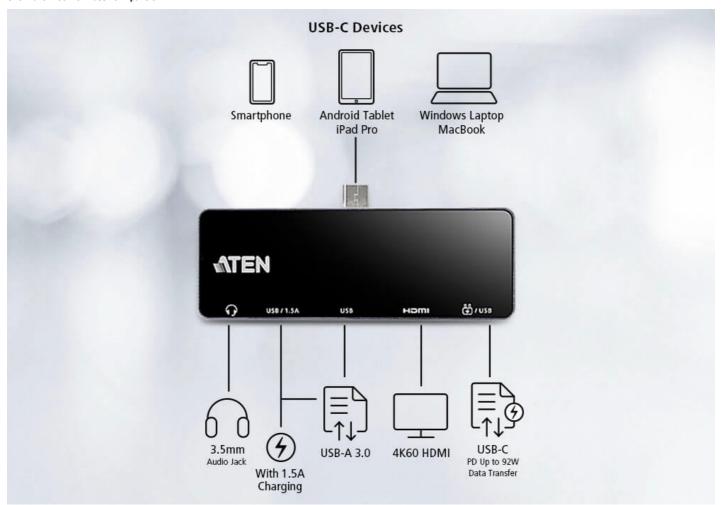

# **Talk to Our Experts**

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly



First Name *	_	
Last Name *		
- Country *		
Company *		
Email *		
Phone Number		
- Customer Type *		
Job Title *		
	•	











### Features

Designed and made to be a portable and versatile connectivity solution, the UH3238 USB-C Travel Dock with Power Pass-Through contains 5 essential ports – one audio port, two USB Type-A ports, one HDMI port, and one USB-C DC in port – to provide connectivity and power supply for users that travel and require mobile office scenarios. The Thunderbolt 3 and USB 3.2 Gen 1-compatible interface guarantees superior data transmission speed up to 5 Gbps. With the support for up to 4K HDMI (3840 x 2160 @ 60Hz), the device allows users to multitask at stunningly realistic UHD resolution. The UH3238 boasts a plug-and-play design and is compatible with all major operating systems (Windows®, macOS X, iPadOS, and Android). Weighing at just 44g, it is a compact, yet competent, and ideal data and power transmission solution for every mobile workstation ecosystem.

- 5-in-1 travel dock that includes one audio port, two USB Type-A ports, one HDMI port, and one USB-C DC in port
   Supports USB PD 3.0 for charging up to 92W via USB-C PD power adapter power profiles include 5V, 9V, 15V, 20V
   Supports DP 1.4 Alt mode with up to 4K (3840 x 2160) @ 60Hz for superior video output
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compliant
- Plug and Play no drivers needed
  Works with all major operating systems: Windows®, macOS X, iPad Pro (USB-C), and Android
  Compatible with Thunderbott™3 (USB-C)
- Compact, lightweight design for mobile workstation Apple M1 chip compatible




## Specifications

Computer	1	
Connections		
Connectors		
Computer	USB 3.2 Gen 1 Type-C	
Device	1 x USB 3.2 Gen 1 Type-A female supports BC 1.2 (Max. output 5V, 7.5W)* 1 x USB 3.2 Gen 1 Type-A female (Max. output 5V, 4.5W)* 1 x USB 3.2 Gen 1 Type-C female (Max. output 5V, 12.5W)*  *a. 2 x USB-A ports share total 5V, 9W when UH3238 powered by external USB-C PD power adapter *b. 2 x USB-A and 1 x USB-C ports share total 5V, 7.5W when UH3238 powered by iPad via USB-C.	
	*c. 2 x USB-A and 1 x USB-C ports share total 5V, 12.5W when UH3238 powered by PC via USB-C. (@5V,3A bus-powered)	
Video Output	1 x HDMI Female (Black)	
Audio	1 x 3.5mm stereo 4-pole microphone and headphone jack	
Power	1 x USB Type-C Female (supports USB 3.2 Gen 1 Data transfer)*	
	*Support Power Delivery 3.0 for laptop charging up to 92W, power profiles include 5V, 9V, 15V, 20V (additional USB-C PD power adapter needed)	
Video Resolution	3840 x 2160@60Hz*	
	* To get max bandwidth, upstream should support standard DP1.4 Alt mode with DSC3:1 and HBR3. When connecting a DP1.2 Alt mode supported upstream, the max resolution of HDMI is 4k@30Hz due to bandwidth limitation	
Power Consumption	DC5V:8WBTU/h	
	Note:  The measurement in Watts indicates the typical power consumption of the device with no external loading.  The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.	
System Requirements	Windows 10 or above, USB-C enabled computer with DP Alt Mode*  * With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html	
	macOS 10.12 or later, USB-C enabled computer	
	iPadOS 13.1 or later, iPad (USB-C)	
	iOS 17.0 or later, iPhone (USB-C)	
	Android 8.0 or later, USB-C enabled Smartphone with DP Alt Mode	
Environmental		
Operating Temperature	0-40°C	
Storage Temperature	-20–60°C	
Humidity	0–80% RH, Non-condensing	
Physical Properties		
Housing	Aluminum	
Weight	0.04 kg ( 0.1 lb )	
Dimensions (L x W x H)	9.00 x 3.20 x 0.82 cm (3.54 x 1.26 x 0.32 in.)	
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	



## Diagram

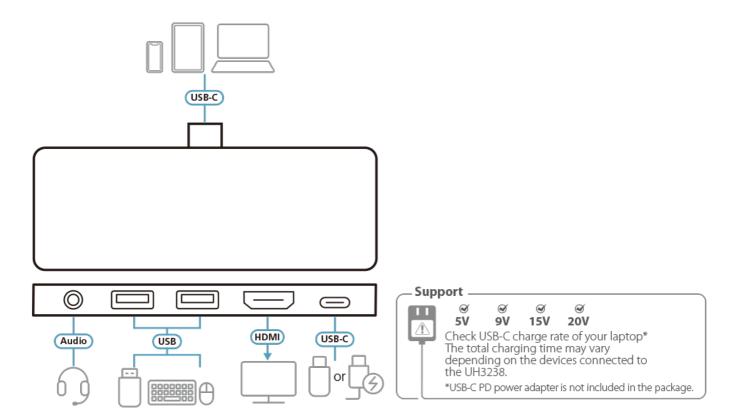

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd. ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.