

## UCE3250

4-Port USB 2.0 Cat 5 Extender (up to 50 m)



The UCE3250 4-port USB 2.0 Cat 5 Extender is a two-unit device that serves as a USB hub and a USB extender. The UCE3250 unit can connect as many as 4 USB peripherals from up to 50 meters away from your computer over an Ethernet cable.

The UCE3250 transmits data through signal packages with better compatibility and preserves the integrity of the data over long distances. The power supply at the remote UCE3250 unit helps provide sufficient power to any type of USB device, such as flash drives, keyboards, mice, webcams, scanners, or printers, etc.

With its durable metal housing, this high-quality USB extender provides a fast and flexible solution for industrial applications. In addition, the compact size and integrated wall mounting enables [space-saving](#) installation.

Note: Please visit [ATEN Support Center](#) to view the test report for the compatible webcams for more information.




### Features

- High-Speed USB 2.0 compliant with a data transfer rate of up to 480 Mbps
- Extension distance of up to 50m over an Ethernet cable
- Receives up to 4 USB peripherals of all types – flash drives, keyboards, mice, webcams, scanners, printers and more
- Metal mechanical with wall mount design supports industrial deployment
- Supports Windows®, OS X®, and Linux®
- Plug- and- play

# Specifications

Function	UCE3250L	UCE3250R
Connectors		
USB Port	1 x USB Type B Female	4 x USB Type A Female
Link	1 x RJ45 Female	1 x RJ45 Female
Power	N/A	1 x DC Jack
USB Specification	2.0 / 1.1 High / Full / Low Speed	2.0 / 1.1 High / Full / Low Speed
USB Devices Supported	N/A	4 Devices
Power Consumption	BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.	DC5V:13W:48BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental		
Operating Temperature	0–50°C	0–50°C
Storage Temperature	-20–70°C	-20–70°C
Humidity	0–80% RH, Non-condensing	0–80% RH, Non-condensing
Physical Properties		
Weight	0.09 kg ( 0.2 lb )	0.16 kg ( 0.35 lb )
Housing	Metal	Metal
Dimensions (L x W x H)	6.70 x 6.02 x 2.37 cm (2.64 x 2.37 x 0.93 in.)	6.33 x 11.04 x 2.41 cm (2.49 x 4.35 x 0.95 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	

Diagram

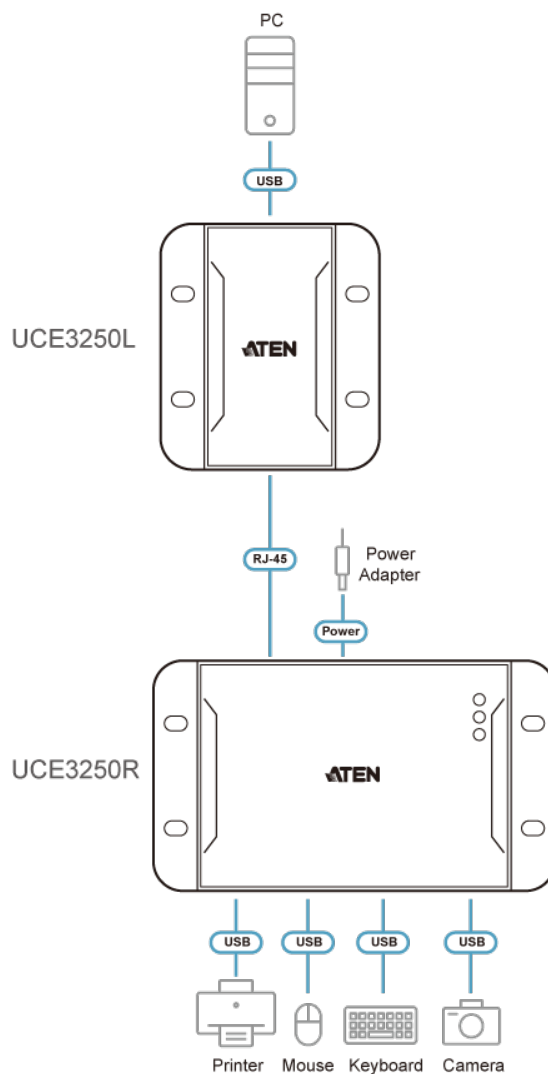

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.