

CS62

Switch KVM PS/2 VGA cablato 2-porte (1,2 m)



CS62 2-port KVM Switch has a handy design integrating with 1.2m of cable. It can control 2 servers via a single console.


Caratteristiche

- One PS/2 console controls 2 PS/2 computers
- Compact design, built in 1.2m cables
- All-in-one design
- Superior video quality-up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered
- OS Compatibility includes Windows 2000/XP/ [Vista](#), LINUX and FreeBSD

Specifiche

Collegamenti del computer	2
Seleziona porta	Tasto di scelta rapida
Connettori	
Porte console	1 x Min-DIN 6 pin femmina (viola) 1 x Min-DIN 6 pin femmina (verde) 1 x HDB-15 femmina (blu)
Porte KVM	2 x Mini-DIN 6 pin maschio (viola) 2 x Mini-DIN 6 pin maschio (verde) 2 x HDB-15 maschio (blu)
LED	
Selezionato	2 (verde)
Lunghezza del cavo	
Computer	1,2 m
Emulazione	
Tastiera / Mouse	PS/2
Video	2048 x 1536; DDC2B
Intervallo di scansione	3, 5, 10, 20 secondi
Ambiente	
Temperatura di esercizio	0-50°C
Temperatura di conservazione	-20-60°C
Umidità	0 - 80% di umidità relativa, senza condensa
Proprietà fisiche	
Struttura	Plastica
Peso	0.27 kg (0.59 lb)
Dimensioni (L x P x A)	7.30 x 6.24 x 2.25 cm (2.87 x 2.46 x 0.89 in.)
Nota	Per alcuni prodotti per il montaggio su rack, le dimensioni fisiche standard LxPxA sono indicate utilizzando il formato LxLxA.

Diagramma topologia

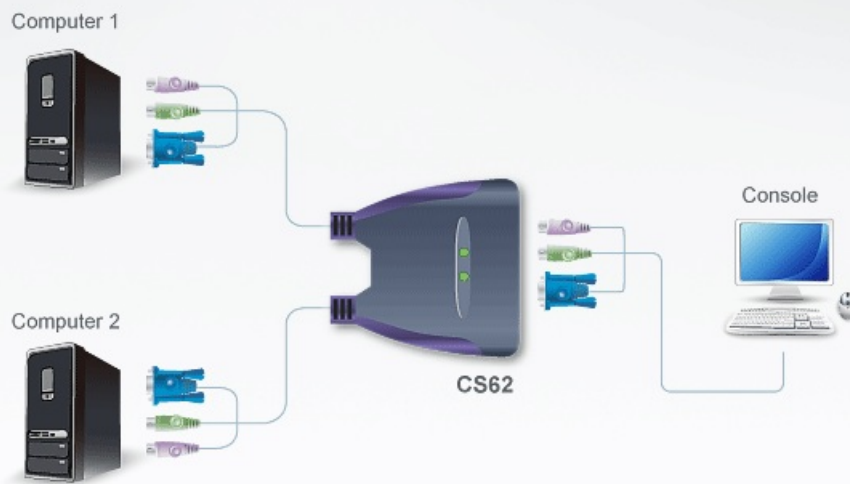

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.