


## EA1440

Photo Door Sensor

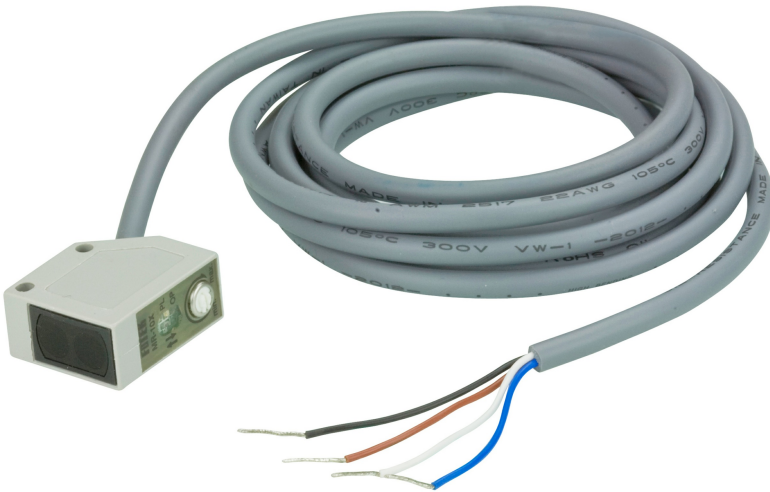

For the security of your data center, ATEN provides Photo Door sensor probes that work in tandem with the Power Distribution Units, which allows the monitoring of a rack mounted enclosure's door access, notifying users when a door has been opened. Various conditions can be monitored with alarms according to customizable minimum/maximum settings.

\* The Sensor is an optional accessory and you can use the ATEN PDU without the door sensors. However, if you want to have complete energy management of your data center with the full use of ATEN solutions, a sensor installation is required.


### 특장점

- The Photo Door Sensor allows the monitoring of a rack mounted enclosure's door access – notifying users when a door has been opened
- High sensitivity
- Easy operation

## 사양

감지 거리	10 cm
동작 온도	10 - 30 VDC; Ripple<20% Peak to Peak
전류 소비	30 mA(Max)
출력 방식	NPN & PNP Two Output
출력 상태	Normal open NO type
출력 전류	150 mA(Max)
누수 전류	0.8 mA(Max)
잔류 전압	0.6 mA(Max)
보호 회로	Short Circuit & Polarity Protection
센서 반응 시간	1 ms(Max)
감도 조정	270° Trimmer
이력현상	10% of Sensing Distance Max
Emitter	Infrared LED
조명	Sunlight < 10,000Lux.; Lamplight < 5,000Lux.
제품 외관	
재질	Plastic

## 다이어그램

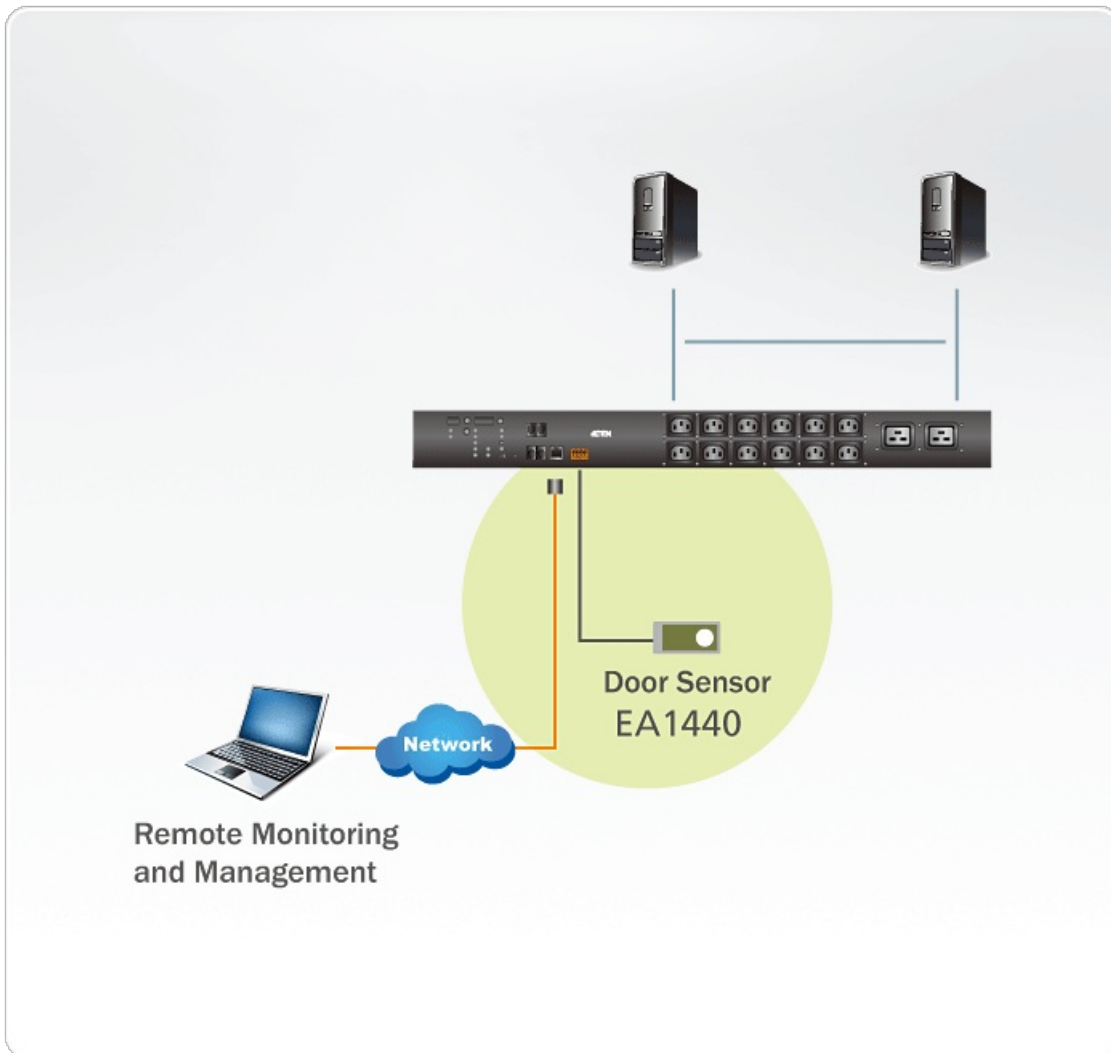

### **ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.