

WMPII-SD-L

10U/12U/15U Wall Mount Rack



......



Space Saving Wall Mount Rack to Enclose and Maximize Usage of Resources



ATEN wall mount racks can be trusted to house your diverse array of assets, including switches, routers, and various networking and surveillance equipment. Our devotion to crafting the finest cabinets and enclosures stems from over 30 years of R&D dedicated to fulfilling the versatile needs of our clients. This is exemplified through our certifications and patents, including UL and CE. Additionally, our premium quality racks are EIA/ECA-310-E compliant, ensuring the overall design requirements for cabinets and racks are fully met.



Space Optimization



Improved Cooling and Ventilation



Wall Mountable





Rack Mountable to Maximize Space

Off-the-ground installation overcomes spacing and cabling limitations by maximizing space and avoiding entangled cabling

Robust and Sturdy Build

Crafted from bent SPCC steel, with maximum capacity of 50 Kg









Designed for Easy Installation & Maintenance

Cable holes deftly designed on both sides of the rack for easier cabling

Advanced Cooling Designs for Efficient Ventilation

45° slant heat dissipation holes are provided on the front of the top and bottom of the rack, for maximum heat dissipation and convection without sacrificing external aesthetics





Contact Us

Get a quote for this product or get in touch with our sales experts

Get Quote <u>Contact Sales</u>

Prevent Overheating to Extend Equipment Shelf Life

Top of the rack is equipped with120V/230V AC fan for effective cooling and accelerated heating dissipation, protecting equipment from overheating and malfunctioning






Applications

ATEN's Wall Mount Racks are ideally suited for locations with tight and limited space, or placed higher up on the wall, such as classroom, train platform, security room, and retailer.



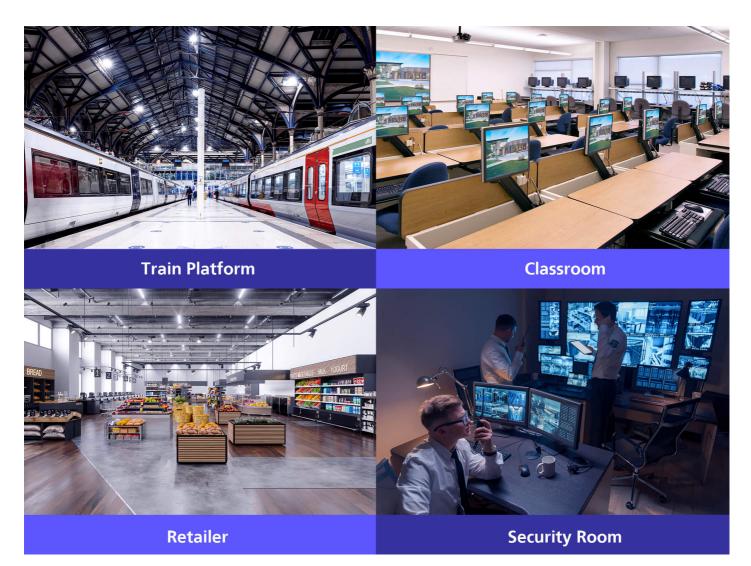

Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly



First Name *		
Last Name *		
- Country *	 	•
Company *		
Email *		
Phone Number		
- Customer Type *		•
Job Title *		



Características

With more than 30 years of experience in R&D and manufacturing cabinet products, ATEN can tailor exclusive products for its customers based on their needs. Our cabinet products, all of which are extremely popular, have been certified by UL and by CE. All ATEN's rack products are EIA/ECA-310-E compliant. Our high-quality cabinets have multiple patents numbered: M377678, M385174, and M513193.

ATEN wall mount racks use a suspended design, and can be affixed on the walls of buildings. This makes them suitable for locations with limited space or when they need to be placed higher up on the wall, such as piping rooms in buildings, classrooms, and train platforms. The cabinets are sturdily built and are equipped with a 120V/230V AC fan, which prevents equipment malfunctions caused by overheating in the rack.

Sturdy Structural Design

- Designed to be installed off the ground, solving the issues of limited space or difficult cabling
- Made from bent SPCC steel, maximum capacity of 50kg
- · Cable holes are provided on both sides of the rack for easier cabling
- 45° heat dissipation holes are provided on the front of the top and bottom of the rack, for maximum heat dissipation and convection while not damaging the external aesthetics
- Comes with a fan (120V/230V AC) on the top of the rack as standard, providing faster heat dissipation and protecting the equipment from malfunctions
- · Holes are provided on the left and right sides of the back of the rack for hanging, and wall plugs are provided for easy installation

Certifications

- UL Certified and CE Certified
- · Compatible with the latest specification of EIA/ECA-310-E

Includes

- WMPII-SD-L wall mount rack enclosure frame × 1 pc
- Acrylic front door (with door lock and key) × 1 pc
- 120V /230V AC Fan \times 1 pc
- M5 Mounting Screw × 20 pcs
- Cage nut × 20 pcs
- Expansion bolt × 4 pcs



Especificaciones

WMPII-106056-19	WMPII-126056-19	WMPII-156056-19				
YGAS-106056-001	YGAS-126056-001	YGAS-156056-001				
Propiedades físicas						
10U	12U	15U				
448 mm	537 mm	671 mm				
508 mm	597 mm	731 mm				
600 mm	600 mm	600 mm				
560 mm	560 mm	560 mm				
White	White	White				
SPCC	SPCC	SPCC				
SPCC	SPCC	SPCC				
Acrylic Front Door	Acrylic Front Door	Acrylic Front Door				
50 kg	50 kg	50 kg				
120 VAC / 230VAC	120 VAC / 230VAC	120 VAC / 230VAC				
	YGAS-106056-001 10U 448 mm 508 mm 600 mm 560 mm White SPCC SPCC Acrylic Front Door 50 kg	YGAS-106056-001YGAS-126056-00110U12U448 mm537 mm508 mm597 mm600 mm600 mm600 mm560 mm560 mm560 mmWhiteWhiteSPCCSPCCSPCCSPCCAcrylic Front DoorAcrylic Front Door50 kg50 kg				

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd. ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.