

RCMDVI40BT

DVI-I Dual Display KVM over IP Transmitter with Remote Access



The RCMDVI40BT is a high performance IP-based transmitter that connects to a DVI-interfaced PC/server which can be remotely accessed via WinClient / JavaClient at a console from a separated location. The RCMDVI40BT DVI-I Dual Display KVM over IP Extender supports two DVI display – provides lossless and low latency video transmissions up to 1920 x 1200 @ 60 Hz. The RCM extender setup allows remote access to computer systems via a USB console (USB keyboard / mouse, DVI monitor) over intranet or the Internet, enabling users to place the managed servers / computers in secure and temperature-controlled environments, which may be isolated from users' workstation.

The RCMDVI40BT is integrated with an exclusive RCM API for providing various extensive functions, including local / remote access control, automated operation sequences (SendKey / SendMouse), screen monitoring, remote troubleshooting, image sampling comparison, optical character recognition (OCR), and more. Additionally, by using the [RCMMS](#) (Remote Control & Monitoring Management Software), a centralized management platform featuring Panel Array, users can manage, monitor, and control up to hundreds of RCM devices simultaneously. The RCMDVI40BT is equipped with an FPGA graphics processor that offers great image and video quality to enhance OCR accuracy. Moreover, in order to enhance production line applications, the RCMDVI40BT supports OSD Title Bar Notification, RFID authentication from a local console, industrial status LED lights with status detection, and Access Control Box ([2XRT-0015G](#)) for managing remote control privilege at local site.

The RCMDVI40BT can be used with ATEN's [CCVSR](#) (Control Center Video Session Recorder software) to record all operations made on the server. Every operation and change – booting up at BIOS level to system level, logging in and logging out, running software applications to configure the operating system – is recorded and saved to a secure video file for security reference and troubleshooting purposes, and etc.

The transmitter supports connections via an RJ-45 port or a SFP slot. It can be connected to a receiver either directly, or via a high-speed network over a copper-based or fiber-based LAN. When connecting to a fiber optic network using 1-Gbps SFP fiber module* expansions, transmission distance can be extended up to 10 km. It also features dual power supplies for redundancy to ensure uninterrupted operation. In addition, with RS-232 support and Auto MDIX, the RCMDVI40BT provides a convenient way to enable digital extension for production line applications through a network.

As an IP-based matrix extender, the RCMDVI40BT can be used as a point-to-point / point-to-multipoint / multipoint-to-point / multipoint-to-multipoint extender. When combined with the KVM over IP Matrix Manager ([CCKM](#)), it can be integrated into a KVM over IP Matrix System (multipoint-to-multipoint) for providing more flexible applications in different working environments.

With integration with the [CCKM](#), IT administrators can benefit from advanced features such as auto detection of all extenders on the same subnet for the sake of fast installation or configuration, username / password authentication and authorization, and the ability to define different types of connections that can be switched and shared. Security features of the RCMDVI40BT include AES 128-bit encryption for secured data transmissions, as well as RADIUS, LDAP, Active Directory, TACACS+ for 3rd-party authentication services. All in all, the RCMDVI40BT is the most cost-effective and convenient way to provide full digital extension for production line applications through a network.

Caraterísticas

• Exclusive RCM functionalities

- Supports ATEN KVM over IP Access Control Box for on-site enabling / disabling of remote control privilege*
- Supports [RCMMS](#) for customizable Panel Array for operators to monitor all machines simultaneously
- OSD Title Bar Notification – instantly notifies users upon urgent events
- Control terminal – supports DI / DO / Relay for the status detection of stack lights or any other external sensors
- Supports an exclusive RCM API that enables more functions (e.g. OCR) to facilitate production line control for system integrators

Note: *The KVM over IP Access Control Box ([2XRT-0015G](#)) is sold separately. Contact your ATEN dealer for product information.

• Advanced Features

- RFID login without typing username and password
- Supports recording of remotely-accessed computer operations using [CCVSR](#)
- Boundless Switching – simply moves the mouse cursor across screen boundaries to switch between different receivers (Rx)
- "Push" and "Pull" – shares content instantly to / from a single Rx or video wall by just one click
- Video Walls – create multiple video walls with up to 12 x 12 (144 displays max.) in each layout
- Advanced Scheduling – improves efficiency and saves costs by allowing connections to be set based on time and date
- Virtual Transmitter – independently streams video, audio, USB, and serial sources from different Tx
- Internal and external authentication support – supports LDAP, Active Directory, RADIUS and TACACS+ external authentications
- Configurable user and group permissions for access and control of RCM devices

Note: These advanced functions are supported when the RCM transmitters are paired with KVM over IP receivers and managed by [CCKM](#).

Hardware

- Supports power / network failover – dual DC jacks for power redundancy and 1 RJ-45 and 1 SFP fiber ports for network failover to ensure constant availability for mission-critical applications
- Supports 1Gbps SFP fiber module expansions up to 10 km¹
- Advance processor provides lossless and low latency video transmissions up to 1920 x 1200 @ 60 Hz
- Supports digital (DVI) or analog (VGA) video output²
- Audio Enabled – supports stereo speakers and microphone
- High speed Virtual Media Support³
- Auto-MDIX – automatically detects cable type
- Built-in 8kV / 15kV ESD protection and 2kV surge protection
- Fanless design for silent operations that are energy efficient
- Mounting options:
 - [2X-021G](#) Dual Rack Mount Kit
 - [2X-031G](#) Single Rack Mount Kit
- Includes an industrial-grade power adapter – supports operating temperature of 0 – 50 °C to ensure durability and adaptability under harsh environmental conditions

Note:

1. The SFP module ([2A-136G](#) / [2A-137G](#)) is sold separately. Contact your ATEN dealer for product information.
2. To convert a DVI to VGA signal, a DVI-I to VGA converter is required.
3. Some features may not be supported, depending on the functionality of the cascaded KVM switch. (For example, some switches do not support virtual media.)

Management

- Integration with ATEN [CCVSR](#) Video Session Recording Software
- Local console – flexible local or over IP console access
- EDID Expert™ – selects optimum EDID settings for smooth power-up and highest quality display
- Four selectable access modes for multiple simultaneous access (Exclusive / Occupy / Share / View only mode) – administrators can select access modes of permissions on Tx devices to boost collaboration or to avoid interference among users
- On-screen Preview – allows users to view the video of up to 36 displays on one screen
- Fast Switching – switches between different remote video resolutions on a local display within 0.3 seconds
- Command Line Interface – administrators can control all RCM devices via RS-232 or TCP / IP using a CLI or 3rd party application
- Supports Hotkey Commands
- Flashing LED and beeping feature helps locate and identify devices
- RCM devices can "Push" and "Pull" to share content

Security

- Dedicated LAN port for RCM direct connections – can be isolated from the corporate network
- Secure data transmission – AES 128-bit encryption to secure all data before transmitted over a network and decrypts the data on the receiver
- Supports industry-standard Transport Layer Security (TLS) protocol

Virtual Media


- Virtual media enables file transfers, OS patching, software installations and diagnostic testing
- Supports USB 2.0 DVD / CD drives, USB mass storage devices, PC hard drives, folders and ISO images
- Supports Smart Card / CAC Reader
- Works with USB-enabled servers at OS and BIOS level

Especificações

Conectores	
Portas de consola	2 x USB Type A Female (White) 2 x DVI-I Female (White) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink) 1 x DB-9 Male (Black)
Portas KVM	1 x USB Type B Female (White) 2 x DVI-I Female (White) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink) 1 x DB-9 Female (Black)
Energia	2 x DC Jack (Black)
Portas LAN	1 x RJ-45 (Black) 1 x SFP Slot
Portas de Internet	1 x RJ-45 (Black)

Porta USB	1 x USB Type A Female (White)
Controlo	1 x 6-pin Mini-DIN (Purple)
E/S	9 x DI (0 - 24V) (Front) 1 x DO (0 - 24V) (Rear)
Relé	8 x Relay (Max 24VDC, 1.2A) (Rear)
Comutadores	
OSD	N/A
Vídeo	N/A
Gráficos	N/A
Reposição	1 x Semi-recessed Pushbutton
Seleção de modo	1 x Slide Switch (Auto, RS-232 Config/Access Control, Local)
LED	
Energia	2 (Green)
Local	1 (Green)
Remoto	1 (Green)
10/100/1000 Mbps	2 x LAN (100: Orange / 1000: Green)
Ligação	2 x LAN (Green) 1 x SFP (Green)
Emulação	
Teclado / Rato	USB
Consumo de energia	DC12V:19.7W:147BTU/h Nota: ● A medição em Watts indica o consumo de energia típico do dispositivo sem carga externa. ● A medição em BTU/h indica o consumo de energia do dispositivo quando este está totalmente carregado.
Resolução de vídeo	Up to 1920 x 1200 @ 60Hz
Especificações ambientais	
Temperatura de funcionamento	0–50°C
Temperatura de armazenamento	-20–60°C
Humidade	0–95% RH, Non-condensing
Propriedades físicas	
Caixa	Metal
Peso	1.53 kg (3.37 lb)
Dimensões (C x L x A)	21.50 x 21.33 x 4.18 cm (8.46 x 8.4 x 1.65 in.)
Nota	Para alguns produtos de montagem em prateleira, tenha em consideração que as dimensões físicas padrão LxPxA são expressas no formato CxLxA.

Diagrama

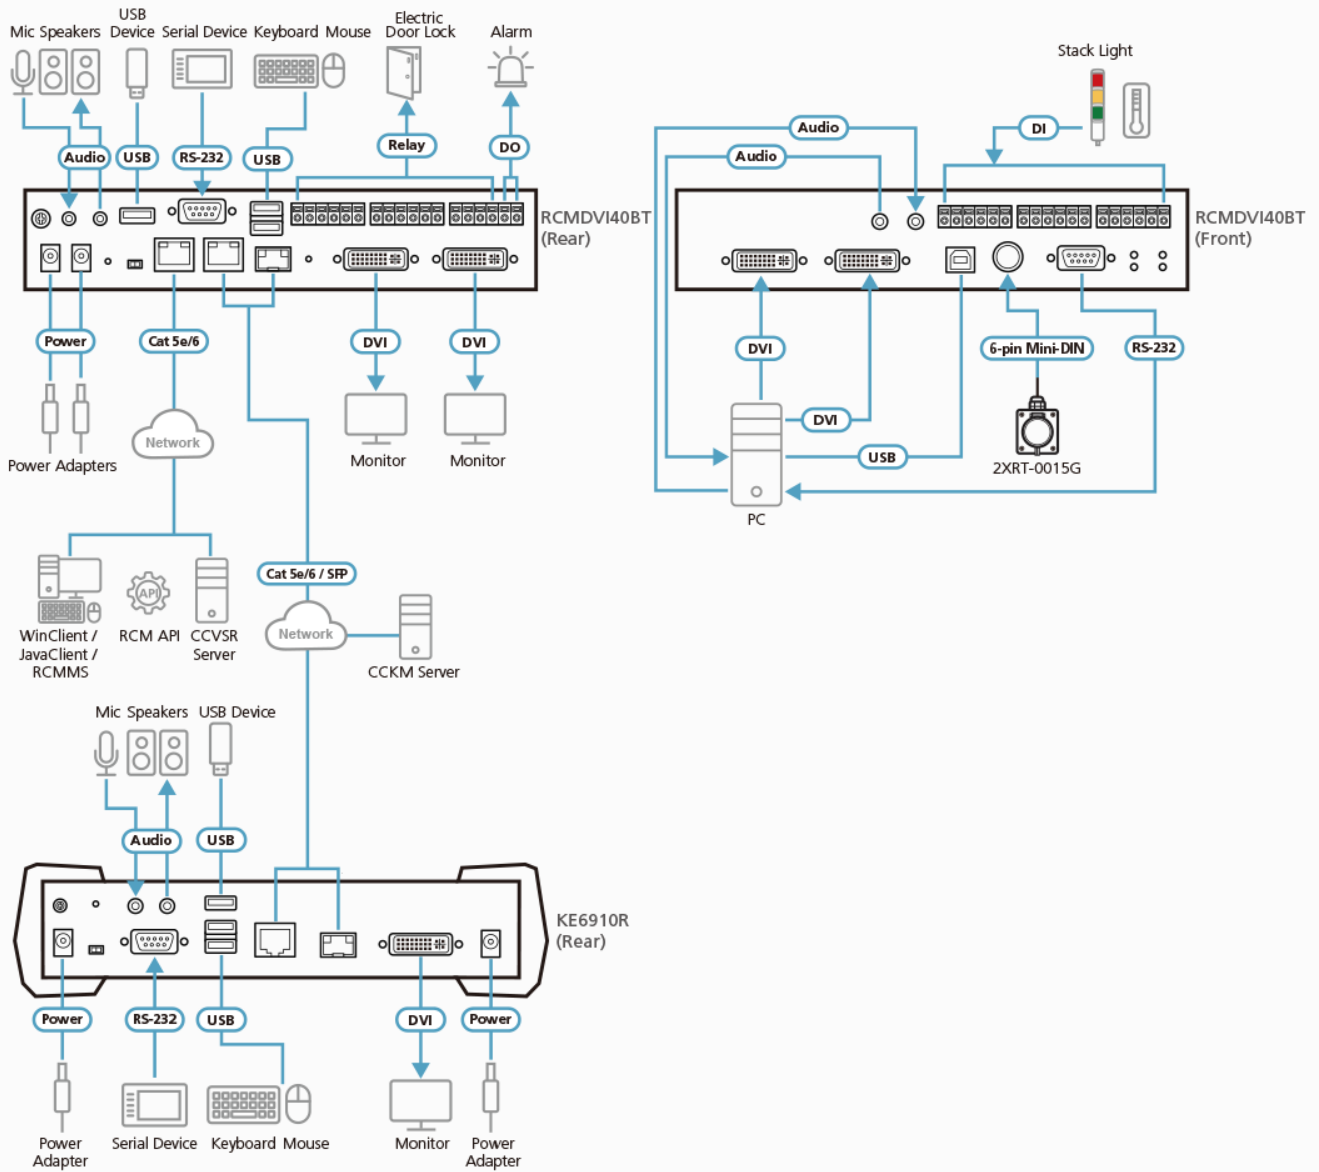

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.