

VS194

Divisor de DisplayPort 4K real de 4 puertos



The VS194 4-Port 4K DisplayPort Splitter is the perfect solution for anyone who needs to send one source of DisplayPort high definition video to 4 DisplayPort displays. The VS194, not only splits but also expands DisplayPort audio/video signals on 4 DisplayPort monitors, is ideal for any multi-display application.

The VS194 is compatible with DisplayPort 1.2a and can support up to 4K resolution at 60 Hz, making it effective and ideal for use with all DisplayPort displays in corporate, educational, and commercial settings.



Caraterísticas

- Liga uma fonte DisplayPort a quatro monitores DisplayPort
 Suporte para DisplayPort 1.2a; HDCP 1.3
 Suporte para resoluções de até 4096 x 2160 / 3840 x 2160 a 60 Hz
- Supports MST/ Extend Mode and SST/ Split Mode*

MST/ Extend Mode:

Extend a video source across 4 displays with a maximum resolution of 4K. SST/ Split Mode:

Duplicate a single video source to 4 displays with a maximum resolution of 4K on each monitor Suporte para Linkrate: HBR2 (High Bit Rate 2)

Note:

* The VS194 will bypass EDID Mode during SST Mode and will detect the resolution of the monitor connected to port 1.




Especificações

200000000000000000000000000000000000000	
Saída de vídeo	
Interfaces	4 x DisplayPort Fêmea (Preto)
Distância máx.	4,6m (4096 x 2160 / 3840 x 2160 a 60Hz) *Testado com 2L-7D04DP
Entrada de vídeo	
Interfaces	1 x DisplayPort Fêmea (Preto)
Distância máx.	4,6m (4096 x 2160 / 3840 x 2160 a 60Hz) *Testado com 2L-7D04DP
Vídeo	
Conformidade	DP 1.2a; HDCP 1.3
Resolução máx.	Até 4096 x 2160 / 3840 x 2160 a 60 Hz
Velocidade de dados máx.	21,6 Gbps (5,4 Gbps por faixa)
Conectores	
Energia	1 x Ficha DC
Consumo de energia	DC5V:3.36W:44BTU/h
	Nota:
Especificações ambientais	
Temperatura de funcionamento	0-40 °C
Temperatura de armazenamento	-20 - 60 °C
Humidade	0 - 80% HR, sem condensação
Propriedades físicas	
Caixa	Metal
Peso	0.33 kg (0.73 lb)
Dimensões (C x L x A)	12.50 x 8.00 x 2.50 cm (4.92 x 3.15 x 0.98 in.)
Lote de embalagem	20 unid.
Nota	
	·



Diagrama

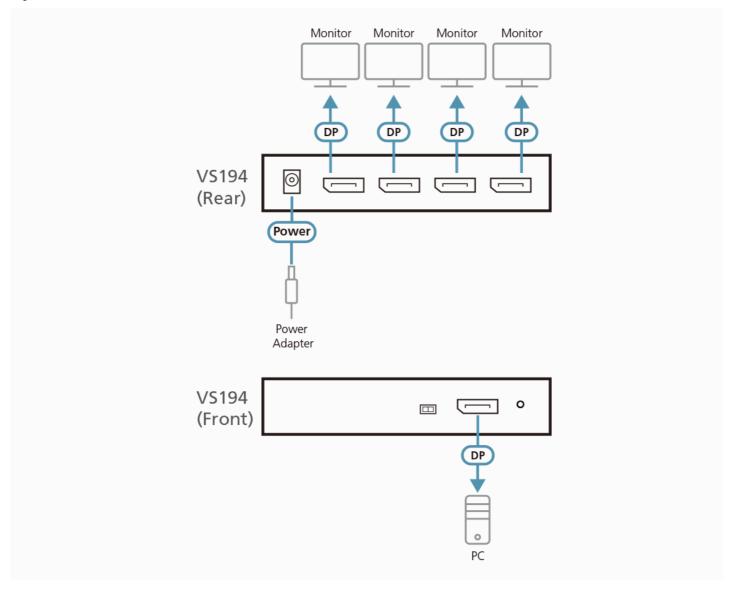

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.