

## KH0116

16-Port High-Density KVM Switch



The entry level series of ALTUSEN High-Density KVM switches are offered in 16 computer port configurations with a 1U high housing for convenient rack mounting. They allow administrators to control multiple computers from a single KVM (keyboard, video, mouse) console. All switches are capable of expansion to provide control of up to hundreds of computers from the original single console for a flexible and economical solution for server room administration.


Convenient features to help network administrators easily manage their server rooms include three selection methods to obtain instant access to any computer on the installation—manual, OSD, and hotkey, while a powerful Auto Scan feature permits scan interval setting and automatic one-by-one scanning and monitoring of the activities of all computers running on the installation.

ALTUSEN High-Density KVM switches are available in several models. These include the KH0116, which, when combined with the [KA9250](#) KVM Verlenger, can be accessed and controlled from a remote console up to 150m away via Cat 5e cable.

### Options

- A single PS/2 console controls up to 16 computers
- Remote Console Operation - control your system from the remote PS/2 keyboard, mouse, and monitor consoles
- Cat 5e cable to connect the KH0116 and remote units ([KA9250](#))
- Dedicated chain ports - daisy chain up to 31 additional units - control up to 512 computers from a single console
- No software required - convenient computer selection via Hotkeys and intuitive On Screen Display (OSD) menus
- No need for manual DIP switch setting - autosensing of station positions for daisy chained installations
- LED indicates station's position
- Auto Scan Mode enables continuous monitoring of user-selected computers
- Hot Pluggable - add or remove computers without having to power down the switch
- Two level password security - only authorized users view and control the computers - up to four Users plus an Administrator - separate profiles for each
- Port names automatically reconfigured when station sequence is changed
- Superior video quality - resolutions of up to 2048 x 1536 -each port supports DDC2B
- Multiplatform support: Windows 2000/XP/[Vista](#), Linux, Unix and FreeBSD.
- For more information about KVMs which can connect to KH0116, see [Compatible KVM Table](#)

## Diagram

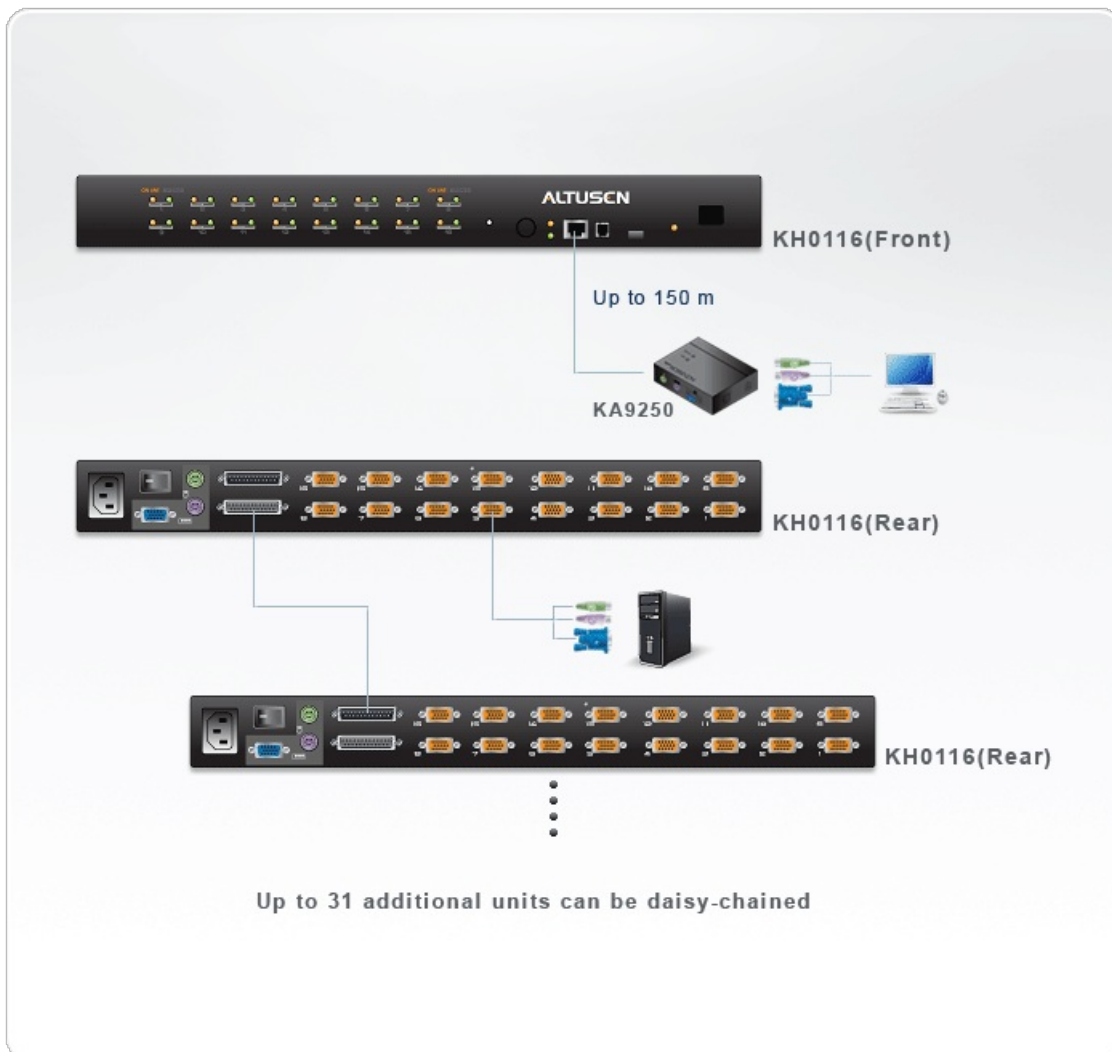

### **ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.