


VE170

VGA / Audio Cat 5 Extender (1024 x 768@300m)



The VE170 VGA / Audio Cat 5 Extenders, consisting of a transmitter (VE170T) and receiver (VE170R), are cost-effective and efficient solutions for sending and receiving high quality audio/video content over long distances. Simply connect the transmitter to the receiver via one Cat 5e cable, and a VGA display or projector can be located up to 300 m (1000 ft) away from the video source.

The VE170 VGA / Audio Cat 5 Extenders provides a flexible solution which is ideal for any professional A/V installation that requires multimedia content to be delivered over a long distance.

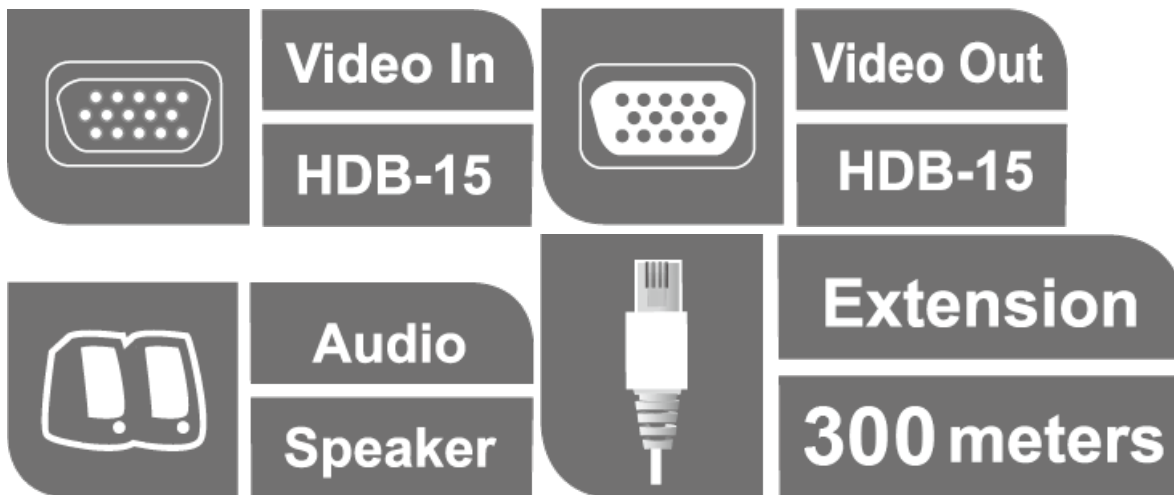

Features


- Connects a transmitter and receiver via Cat 5e cable
- Long distance transmission - up to 1920 x 1200@30m; 1024 x 768@300m
- Supports one local and one remote VGA display
- Long distance transmissions – up to 300 m
- [Adjustable Gain Control](#) – signal strength can be manually adjusted via video gain or video compensation tuners
- Audio supported (mono)
- Built-in ESD protection
- Rack-mountable

Specifications

Function	VE170R	VE170T
Video Input		
Interfaces	N/A	1 x HDB-15 Male (Blue)
Impedance	N/A	75 Ω
Max. Distance	N/A	1.8 m
Video Output		
Interfaces	1 x HDB-15 Female (Blue)	1 x HDB-15 Female (Blue)
Impedance	75 Ω	75 Ω
Video		
Max. Bandwidth	300 MHz	300 MHz
Max. Resolutions / Distance	Up to 1920 x 1200@30m; 1024 x 768@300m	Up to 1920 x 1200@30m; 1024 x 768@300m
Audio		
Output	1 x Mini Stereo Jack Female (Green)	1 x Mini Stereo Jack Female (Green)
Input	N/A	1 x Mini Stereo Jack Female (Green)
Connectors		
Power	1 x DC Jack	1 x DC Jack
Environmental		
Operating Temperature	0-50°C	0-50°C
Storage Temperature	-20 - 60°C	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing	0 - 80% RH, Non-Condensing
Physical Properties		
Housing	Metal	Metal
Weight	0.24 kg (0.53 lb)	0.25 kg (0.55 lb)
Dimensions (L x W x H)	12.77 x 9.04 x 2.26 cm (5.03 x 3.56 x 0.89 in.)	12.77 x 9.04 x 2.26 cm (5.03 x 3.56 x 0.89 in.)
Carton Lot	5 pcs	5 pcs

Power Consumption	DC5.3V:3.32W:16BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. 	DC5.3V:2.42W:11BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	

Diagram

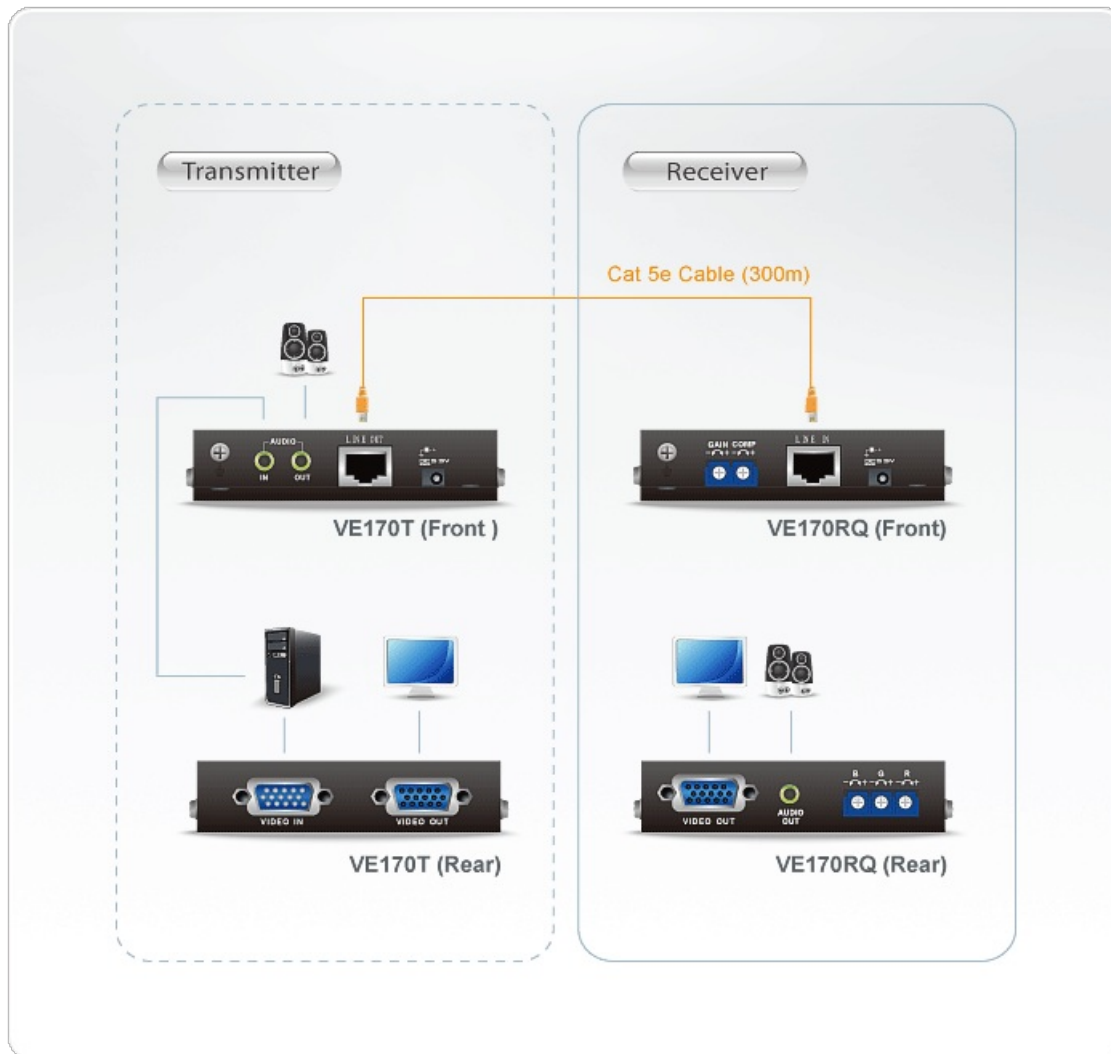

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.