

PN0108

8-Port Power Over the NET™



Altusen's PN0108 is equipped with eight hotpluggable ports for easy server room management. Each port can be individually controlled so that users can set the power on sequence and delay time for each port to allow equipment to be turned on in the proper order. On/Off scheduling allows for preset start/shutdowns/restarts on a daily, weekly,monthly basis. The PN0108 is the most convenient, reliable and cost effective way to obtain access to your server room remotely.*

Egenskaper

- Remote power on / off / reboot control for eight outlets via TCP/IP and a built in RS-232 PON (Power Over the NET™) port
- Local power on / off / reboot control via the PN0108's PON port to the computer's RS-232 port
- Daisy chain up to 15 additional stations to control up to 128 outlets
- Manual switching between Local and Remote access for each port via front panel push button switches
- Individual control of each port users can set the power on sequence and delay time for each port to allow equipment to be turned on in the proper order
- Easy setup and operation via a GUI interface
- Provides three configuration/management methods: Browser; Telnet; or Console Terminal
- Safe shutdown and rebooting for Windows systems*
- Overcurrent protection and recovery for each AC port (110 V model only); total port overcurrent protection (both models) remote users can monitor the outlet status via the GUI interface
- Separate circuits for the unit's power and the power to the devices the power control status menu is still accessible even when an overcurrent condition trips the devices' circuit breaker
- On/Off scheduling allows everything from a one-time start/shutdown, to daily, weekly, etc. starts/shutdowns at user-specified times
- Port grouping perform the same action on a specified group of ports
- LEDs for easy status monitoring
- Two level (Administrator and User) security
- · Configuration can be reset
- Firmware upgradeable daisy chained stations receive the upgrade via the daisy chain bus
- UL/TUV approved
- Multiplatform support: Windows 2000/XP/Vista, Linux, Unix and FreeBSD.

*Safe shutdown and rebooting is supported if the Power Monitor utility has been installed

For more information about KVMs which can connect to PN0108, see Compatible KVM Table


*The PN0108 is not a stand-alone unit. It must be connected to the CN6000, PN9108, SN0108 or SN0116 to access these features

Specifikation

alias



Diagram

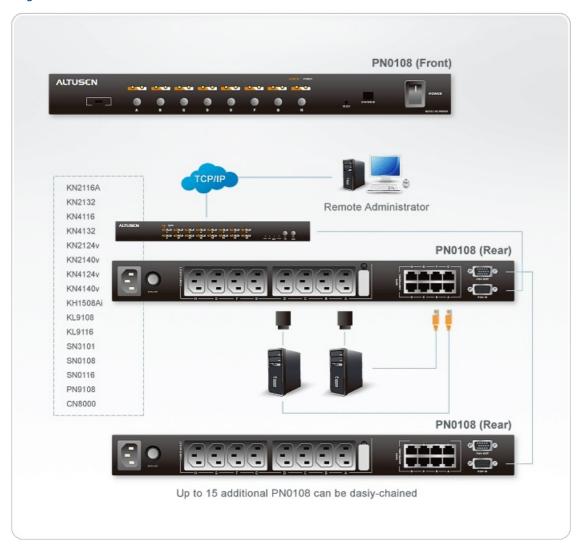

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.