Simply Better Connections

PE1324B

基本型可量測0U電源分配器

PE1324B

專門為提升IT環境中的配電及電源狀態監控效率而打造的ATEN基本型可量測電源分配器，採用0U規格並具有24個IEC電源插座，其緊密的配置以及支援機架安裝的設計有助於節省空間，並消除雜亂無章的走線。

為了監控連接設備的電源狀態，ATEN基本型可量測電源分配器搭載雙3位數7段顯示器，可即時顯示輸入電壓和輸出電流，為數據中心的IT設備 – 包括伺服器、儲存系統、KVM 多電腦切換器、網絡設備，提供安全、集中的電力控管，以優化電力消耗和資產管理。

功能

- 節省空間 – 0U機架安裝設計
- IEC或NEMA插座選擇
- 雙3位數7段顯示器，可顯示電壓和電流
- 搭配EC1000節能盒使用，可即時監控電源分配器的電流

規格

電子特性	
標稱輸入電壓	100-240 VAC
最大輸入電流	最高30A (UL最高24A)
輸入頻率	50-60 Hz
輸入連接介面	NEMA L6-30P
輸入電力	最高7200 VA (UL最高 5760 VA)
插座類型	(22) IEC 320 C13, (2) IEC 320 C19
最大輸出電流 (插座)	C13: 最高15A (UL最高12A) C19: 最高20A (UL最高16A)
最大輸出電流 (迴路)	最高20A (UL最高16A)
最大輸出電流 (總額)	最高30A (UL最高24A)
OPD(過載保護裝置)	有
機體屬性	
尺寸 - 長 x 寬 x 高 cm (公分), in. (英吋)	123.11 x 4.44 x 6.00 cm (48.47 x 1.75 x 2.36 in.)
重量 g (公克), kg (公斤), lb(英磅)	3.80 kg (8.37 lb)
電源線長度	10呎 (10#)
作業環境	
溫度 (操作 / 存放)	0 – 40°C / -20 – 60°C
高度	3000 公尺
規範	
EMC驗證	FCC Class A
安全認證	UL, 其他視要求而定
附註	對於部分上機架機種，規格表中尺寸 (長 x 寬 x 高) 亦代表 (寬 x 深 x 高)

連線圖

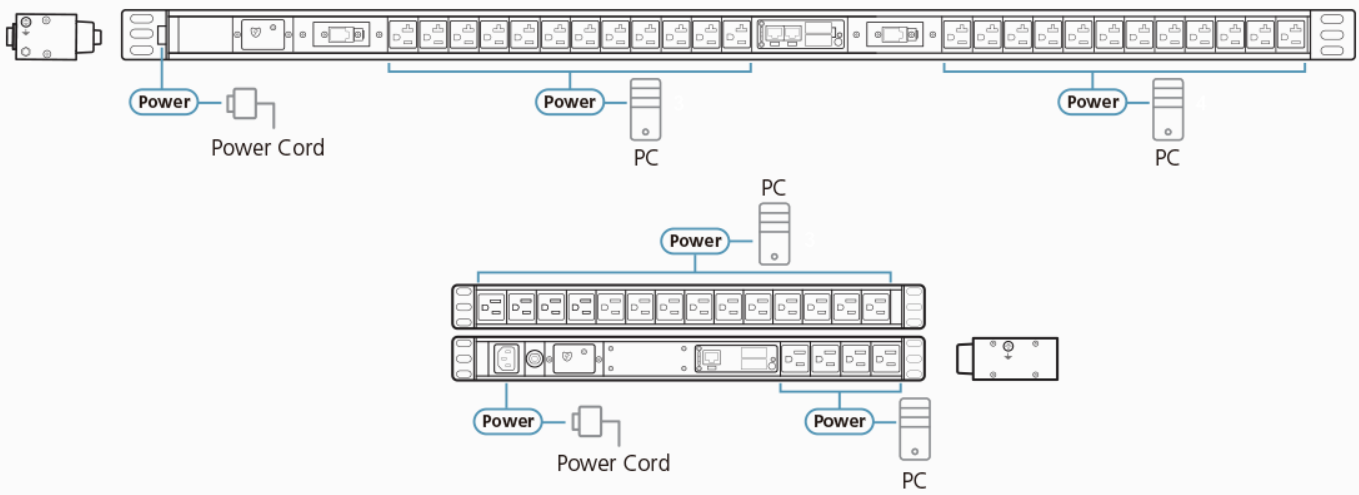

Note: As there are many Basic Metered PDUs, PE1324S (top) and PE1118S (bottom) are the respective 0U and 1U examples used here.

Simply Better Connections

ATEN International Co., Ltd.
3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.