

CS1732A

2-Port PS/2-USB VGA/Audio KVMP™ Switch



CS1732A 2 Port KVM Switch has built-in USB on each of the front and rear panels and audio signal connectors. It allows users to control the computer and peripheral devices via a signal console at ease.

Features


- One USB console controls 2 computers and two additional USB devices
- 2 port USB Hub built in
- Dual interface supports computers with PS/2 or USB keyboards and mice
- Multiplatform support: compatible with all operation platforms PC (Windows, Linux and most others), Mac and Sun
- With speaker and microphone support
- [Bi-directional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus](#)
- Auto PS/2 and USB interface detection
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality - up to 2048 x 1536; DDC2B
- Firmware upgradable
- OS Support: Windows 2000, Windows XP, [Windows Vista](#), LINUX, Mac, Sun and FreeBSD
- SUN/Mac keyboard support and emulation*
 - *1.PC keyboard combinations emulate SUN/Mac keyboards.
 - *2.SUN/Mac keyboards only work with their own computers

Specifications

| | |
|---------------------------------|---|
| Computer Connections | 2 |
| Port Selection | Hotkey, Pushbutton |
| USB Port / Audio Port Selection | Hotkey |
| Connectors | |
| Console Ports | 2 x USB Type A Female (White) 1 x HDB-15 Female (Black) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink) |

| | |
|------------------------|--|
| KVM Ports | 2 x SPHD-15 Female (Yellow) 2 x Mini Stereo Jack Female (Green) 2 x Mini Stereo Jack Female (Pink) |
| USB Hub | 2 x USB Type A Female (Black) |
| Firmware Upgrade | 1 x RJ-11 Female (Black) |
| Power | 1 x DC Jack |
| Switches | |
| Ports | 2 x Pushbutton |
| Firmware Upgrade | 1 x Slide |
| LEDs | |
| Online / Selected | 2 (Orange) |
| USB Link | 2 (Green) |
| Emulation | |
| Keyboard / Mouse | USB |
| Video | 2048 x 1536; DDC2B |
| Scan Interval | 1-99 seconds |
| Power Consumption | DC5V:0.94W:30BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0-50°C |
| Storage Temperature | -20-60°C |
| Humidity | 0-80% RH, Non-condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 0.55 kg (1.21 lb) |
| Dimensions (L x W x H) | 14.00 x 8.80 x 5.55 cm (5.51 x 3.46 x 2.19 in.) |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

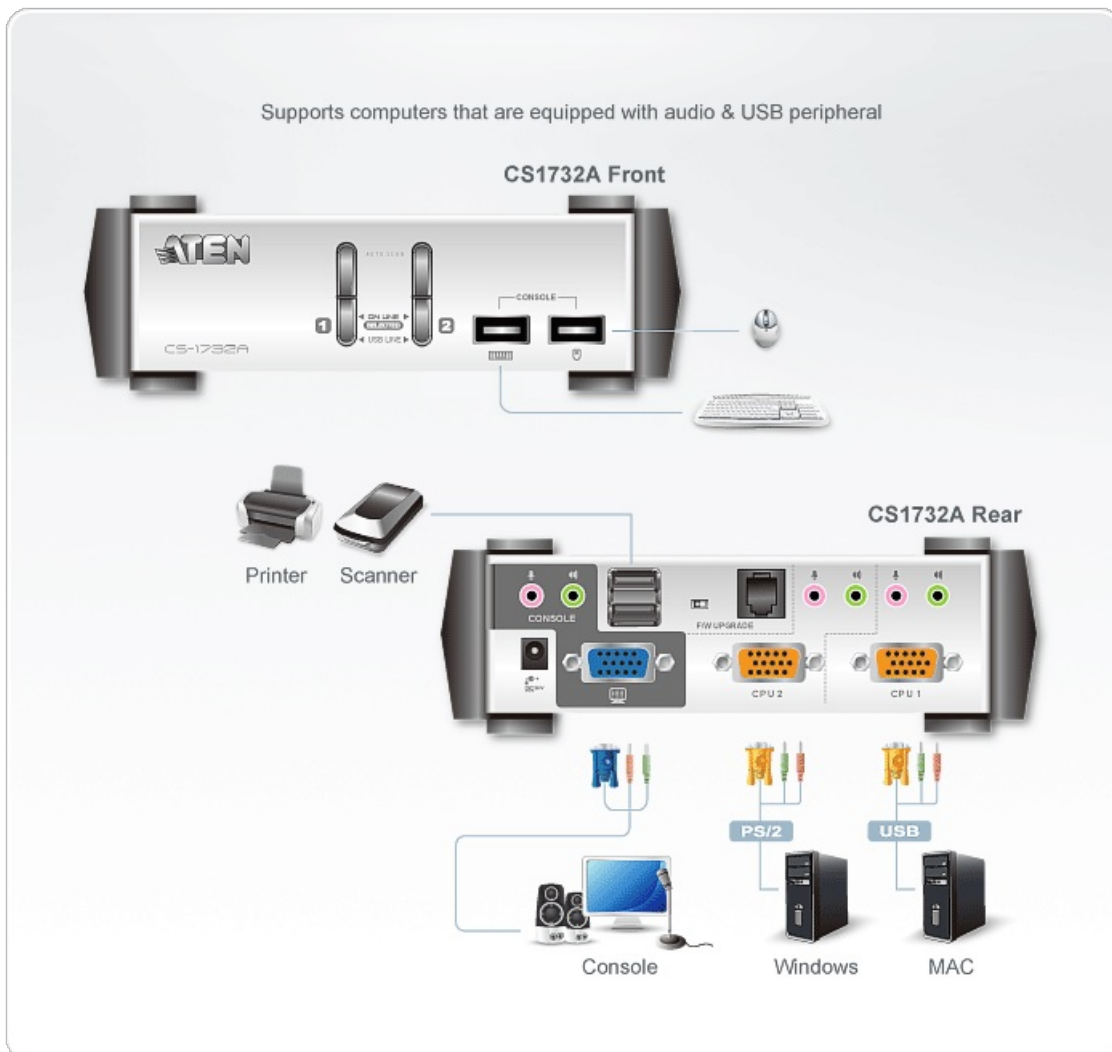

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.