

## KA7920

PS/2 VGA KVM Adapter Cable



[The most cost effective choice for installations with less than 4.5m between server and switch!](#)

The KA7920 PS/2 KVM Adapter Cable connects the KVM switch to the video, PS/2 mouse and PS/2 keyboard ports of the target computer. With its small form factor and light weight design, it fits perfectly into most of the rack-mount or desktop servers.


### Features

- Keyboard and mouse emulation - keeps your server functioning smoothly when it is disconnected from the switch's KVM port or relocated to different KVM port
- Lifetime firmware upgrades
- Built in 4.5m Cat 5 cable
- Superior video quality - supports resolution of up to 1600 x 1200 within the distance of up to 4.5m
- Hot pluggable - add or remove computers without having to power down the switch.
- Compact size

## Specifications

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Connectors             |                                                                                                                                 |
| Link                   | 1 x RJ-45 Male with 4.5m Cat 5 cable                                                                                            |
| Computer               | 2 x 6-pin Mini-DIN Male<br>1 x HDB-15 Male                                                                                      |
| LEDs                   |                                                                                                                                 |
| Online                 | 1 (Orange)                                                                                                                      |
| Environmental          |                                                                                                                                 |
| Operating Temperature  | 0-50°C                                                                                                                          |
| Storage Temperature    | -20-60°C                                                                                                                        |
| Physical Properties    |                                                                                                                                 |
| Housing                | Plastic                                                                                                                         |
| Weight                 | 0.25 kg ( 0.55 lb )                                                                                                             |
| Dimensions (L x W x H) | 7.93 x 3.70 x 1.55 cm<br>(3.12 x 1.46 x 0.61 in.)                                                                               |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

## Diagram

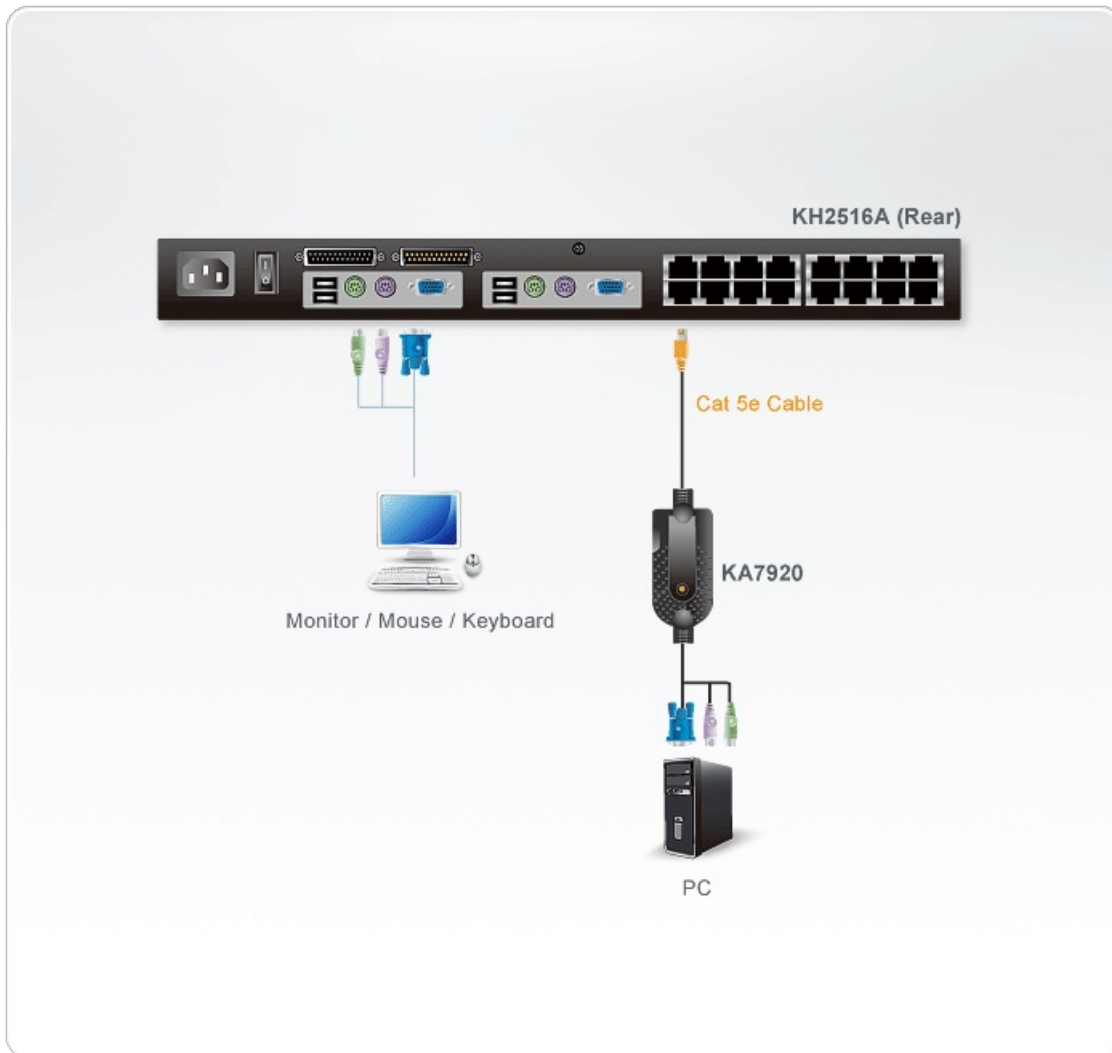

### **ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.