

# CN9850

1-Local / Remote Shared Access Single Port 4K HDMI KVM over IP Switch



The CN9850 KVM over IP Switch allows for remote access to video, audio, and virtual media of a PC or workstation, and features HDMI high-definition video with resolutions of up to 4K DCI (4096 x 2160) @ 30 Hz at both the local and remote consoles. Built with an advanced FPGA graphics processor, the CN9850 offers better image and video quality to enhance the user experience, while also meeting the RS-232 standards for serial control.

For user-friendly operation, a mini USB port on the front panel is designed as a Laptop USB Console (LUC) port for connection to a laptop, which allows the user to access the PC / server for easy routine maintenance without requiring an additional monitor, keyboard, and mouse.

To seamless stable connectivity, the CN9850 is equipped with dual LAN and dual power functionality to keep operations in the server room smooth and efficient. Its power status detection function automatically sends out event notifications when the devices are offline (e.g. power failure) for device status monitoring. Moreover, the CN9850 features a 5-pin Relay / DI (digital input) terminal block allowing for remote reboot of the local server, and receiving digital input from a connected input/alarm device for notification of critical events.

For ease of remote management, the CN9850 WebClient Viewer supports remote desktop access without additional software applications. The HDMI 4K KVM over IP Switch provides a webbased GUI for remote access and management. In addition, a unified multi-language interface can minimize user training time and increase productivity.

The CN9850 is ideal for data centers, server rooms, and control rooms for remote access management in industries with requirements for high-quality images and multitasking, such as global organizations and companies with several office locations where it can function as a bridge between local and remote workplaces.





### Features

The CN9850 KVM over IP Switch allows for remote access to video, audio, and virtual media of a PC or workstation, and features HDMI high-definition video with resolutions of up to 4K DCI (4096 x 2160) @ 30 Hz at both the local and remote consoles. Built with an advanced FPGA graphics processor, the CN9850 offers better image and video quality to enhance the user experience, while also meeting the RS-232 standards for serial control.

For user-friendly operation, a mini USB port on the front panel is designed as a Laptop USB Console (LUC) port for connection to a laptop, which allows the user to access the PC / server for easy routine maintenance without requiring an additional monitor, keyboard, and mouse

To seamless stable connectivity, the CN9850 is equipped with dual LAN and dual power functionality to keep operations in the server room smooth and efficient. Its power status detection function automatically sends out event notifications when the devices are offline (e.g. power failure) for device status monitoring. Moreover, the CN9850 features a 5-pin Relay / DI (digital input) terminal block allowing for remote reboot of the local server, and receiving digital input from a connected input/alarm device for notification of critical events.

For ease of remote management, the CN9850 WebClient Viewer supports remote desktop access without additional software applications. The HDMI 4K KVM over IP Switch provides a webbased GUI for remote access and management. In addition, a unified multi-language interface can minimize user training time and increase productivity

The CN9850 is ideal for data centers, server rooms, and control rooms for remote access management in industries with requirements for high-quality images and multitasking, such as global organizations and companies with several office locations where it can function as a bridge between local and remote workplaces.

## Hardware

- Supports HDMI resolution up to 4K DCI (4096 x 2160) @ 30 Hz 1
- A mini USB port in the front panel can serve as a Virtual Media USB port or a Laptop USB Console (LUC) port
- A minil use poin in the front parier can serve as a virtual webal use port of a Laptop use to Compact and slim design for space utility optimization.
  Supports 5-pin Relay / DI Terminal for environment monitoring and remotely reboot control Provides an FPGA graphics processor for better image quality
  Two 10 / 100 / 1000 Mbps NiCs for redundant LAN or two IP operation
  Dual power supply to ensure seamless connectivity

- Provides over IP capability to HDMI KVM switches without over IP functionality <sup>2</sup>
   Allows access to the CN9850 via a built-in serial viewer, or via third-party software (such as PuTTY) for Telnet and SSH se

- Audio is not supported by CN9850 HDMI and can only be transmitted through its 3.5 mm audio ports.
   When the CN9850 is used with CS1798 or CS17916, the mouse on the CN9850 should be changed to manual sync mode to avoid compatibility issue.

### Management

- Complies to the RS-232 standards for serial control
- Up to 64 user accounts up to 32 users can simultaneously share control
   Note: As more users connect to the device, the bandwidth allocated to each user decreases
- Console access right management
   End session feature administrators can terminate running sessions

- End session feature administrators can terminate running sessions
  Event logging and Windows-based Log Server support
  Event logging the CN9850 can record all events that take place on it and write them to a searchable database
  Supports instant notification of critical system events via email, SNMP trap, and Syslog
  Firmware upgradable via remote access
  Out of Band support access the CN9850 through its serial port using a dial-up connection
  Local / Remote Share Mode conveniently grants shared or exclusive console privilege
  Port Share Mode allows multiple users to gain access to a server simultaneously
  DDNS allows mapping of a dynamic IP address assigned by a DHCP server to a host name
  Supports export / import of user account and configuration settings
  Supports Prof.
  Supports IPv6
  Integration with ATEN CC2000 Management Software

- Integration with ATEN <u>CC2000</u> Management Software
   Integration with ATEN <u>CCVSR</u> Video Session Recording Software

## - Fasy-to-Use Interface

- Browser-based and AP GUIs offer a unified multi-language interface to minimize user training time and increase productivity Multiplatform client support (Windows, Mac, Linux, Sun)
  Multibrowser support (IE, Firefox, Safari, Opera, Chrome)

- Browser-based UI in pure web technology allows administrators to perform administrative tasks without pre-installed Java software package requirements Full-screen or sizable and scalable Virtual Remote Desktop
- Magic Panel with configurable function for guick launch

# Advanced Security

- External authentication support: RADIUS, LDAP, LDAPS, and MS Active Directory
- Supports TLS 1.2 data encryption and RSA 2048-bit certificates to secure users logging in from browsers
  Flexible encryption design allows users to choose any combination of 56-bit DES, 168-bit 3DES, 256-bit AES, 128-bit RC4, or Random for independent keyboard / mouse, video, and virtual media data encryption
  Supports TLS 1.2 data encryption design allows users to choose any combination of 56-bit DES, 168-bit 3DES, 256-bit AES, 128-bit RC4, or Random for independent keyboard / mouse, video, and virtual media data encryption
  Supports TLS 1.2 data encryption and RSA 2048-bit certificates to secure users logging in from browsers
- Supports password protection
   Private CA

## Virtual Media

- Virtual media enables file applications, OS patching, software installation, and diagnostic testing
   Works with USB-enabled servers at OS and BIOS level
   Supports USB 2.0 DVD / CD drives, USB mass storage devices, PC hard drives, folders, and ISO images

# Virtual Remote Desktop

- Video quality and video tolerance can be adjusted to optimize data transfer speed; monochrome color depth, threshold, and noise settings can be adjusted for compression of the data bandwidth in low-bandwidth situations


- Video quality and video tolerance can be adjusted to optimize data transfer speed; mone Full-screen video display or scalable video display or Sessee Board for communication among remote users
   On-screen keyboard with multi-language support
   Mouse DynaSync™—automatically synchronizes the local and remote mouse movement Supports Exit Macros
   SUNS-Just 1 concre
- BIOS-level access




# Specifications

Specifications	
Connectors	
Console Ports	2 x USB Type A Female (White) 1 x HDMI Female (Black) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
KVM Ports	1 x USB Type B Female (White) 1 x HDMI Female (Black) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
LAN Ports	2 x RJ-45 Female
Power	2 x DC Jack
Serial	2 x RJ-45 Female
Control	1x PS/2 Female
Laptop USB Console (LUC) Port	1 x USB Mini-B Female
Switches	
Reset	1 x Semi-recessed pushbutton (Black)
Emulation	
Keyboard / Mouse	USB
LEDs	
Power	2 (Green)
Video	Local console - 4096 x 2160 @ 30 Hz Remote console - 4096 x 2160
Power Consumption	DC5V:10.07W:48BTU/h  Note:  The measurement in Watts indicates the typical power consumption of the device with no external loading.  The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0 - 50°C (CN9850) 0 - 40°C (Power Adapter)
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.84 kg (1.85 lb)
Dimensions (L x W x H)	20.00 x 15.05 x 2.84 cm (7.87 x 5.93 x 1.12 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

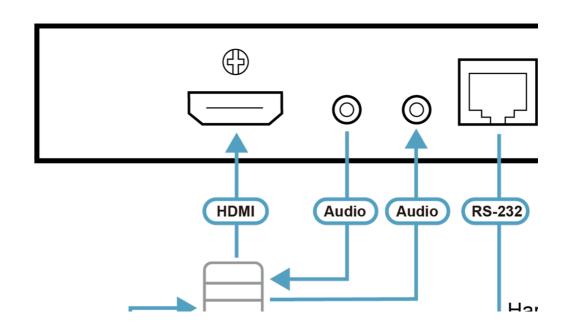



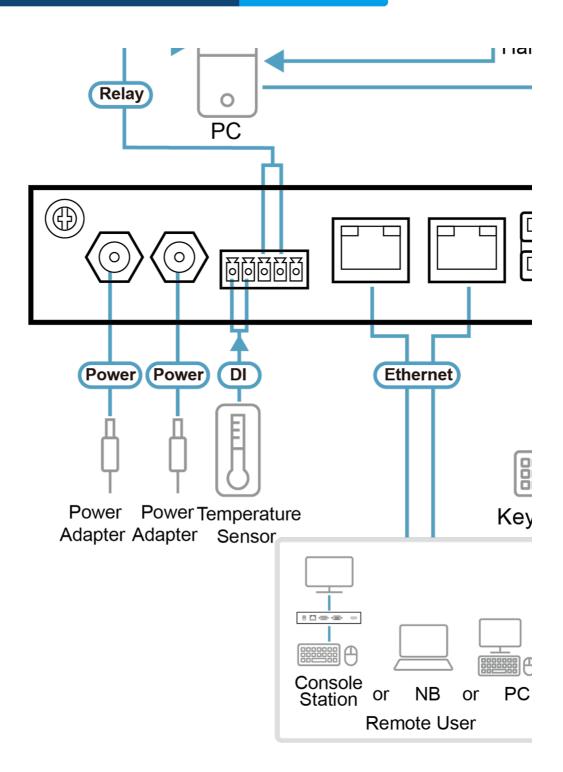

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com

