

CS1182DPH4C

2-Port USB 5K DisplayPort/HDMI Universal Secure KVM Switch with CAC (PSD PP v4.0 Compliant)



ATEN PSD PP v4.0 Universal Secure KVM Switch CS1182DPH4C is specifically designed to meet the stringent security requirement of secure defense and intelligence installations. ATEN PSD PP v4.0 Universal Secure KVM Switch CS1182DPH4C is compliant with PSD PP v4.0 (Protection Profile for Peripheral Sharing Device, Version 4.0) standard certified by the National Information Assurance Partnership (NIAP).

ATEN PSD PP v4.0 Universal Secure KVM Switch CS1182DPH4C provides isolation between computer sources and peripherals while sharing a single keyboard, mouse, monitor, speaker set, and Common Access Card (CAC) reader between connected computers of various security classifications. Compliance with PSD PP v4.0 ensures peripheral sharing capabilities provide maximum user data security when switching port focus, preventing unauthorized data flows or leakage between connected sources. Key protections include isolation and unidirectional data flow, restricted peripheral connectivity and filtering, user data protection, configurable device filtration and management, strict audio filtration, and always-on tamper-proof design, keeping sensitive assets isolated and providing advanced security and a user friendly design for instantly secure deployment.

To fulfill different customer demands, ATEN PSD PP v4.0 Universal Secure KVM Switches offer a wide range of options, including 2-port and 4-port, CAC and Non-CAC models, and support for DisplayPort or HDMI interfaces through a single combo connector. ATEN PSD PP v4.0 Universal Secure KVM Switches also provide customers with the flexibility to connect single or dual displays, providing superior video quality up to 5K (5120 x 2880 @ 60Hz) 1. 5K resolution provides greater screen real estate and sharper detail, allowing users to view multiple classified sessions, monitoring dashboards, or data-intensive applications side by side with uncompromised clarity. This enhanced visual precision helps minimize task-switching and potential errors, improving both operational accuracy and overall productivity in mission-critical or security-conscious workplaces.

To enhance security, ATEN PSD PP v4.0 Universal Secure KVM Switch CS1182DPH4C only offers manual switching methods including front panel pushbuttons and Remote Port Selector (RPS) 2. With multi–layered security, ATEN PSD PP v4.0 Universal Secure KVM Switch CS1182DPH4C ensures high-level desktop security and data safekeeping for applications such as government and military agencies, healthcare providers, banking & finance institutions, and other organizations that often handle sensitive or confidential data on separate networks.

- 1. Supports video output resolutions up to 5120 × 2880 @ 60Hz, 5120 × 2160 @ 60Hz, 5120 × 1440 @ 60Hz/120Hz/144Hz, 3840 × 2160 @ 60Hz/120Hz/144Hz.

 2. The Remote Port Selector is not supplied in the package and requires a separate purchase.















Data Channel Isolation



Unidirectional Data Flow









Features

· NIAP Common Criteria Compliant

• Compliant with PSD PP v4.0 (Protection Profile for Peripheral Sharing Device, Version 4.0) security requirements

Multi-Layered Security

- Always-on chassis intrusion detection renders the ATEN PSD PP v4.0 Universal Secure KVM Switch series inoperable when physical tampering is detected
 Tamper-evident labels provides visual indication of any attempt to access the ATEN PSD PP v4.0 Universal Secure KVM Switch's internal components
 Non-reprogrammable firmware prevents reprogramming the ATEN PSD PP v4.0 Universal Secure KVM Switch's firmware
 Restricted peripheral connectivity non-authorized HIDs (Human Interface Devices), video, or authentication device connections are rejected
 Port selection via pushbuttons / Remote Port Selector (RPS) 1 only to enhance security
 Configurable Port LED color and Port Name Labels easier identification between ports connected to different security classification levels
 LED indicators for peripheral filtering and KVM security status
 Strict audio filtration protects against audio leakage
 Compact size, rugged metal enclosure

• Data Channel Isolation and Unidirectional Data Flow

- True data path isolation data cannot be transferred between computers
- The ATEN PSD PP v4.0 Universal Secure KVM Switch controls and isolates data flow between the console devices and connected computers
 Unidirectional data flow between console devices and the selected computer is ensured
- Supports analog audio (speaker only) 2

• User Data Protection

• The ATEN PSD PP v4.0 Universal Secure KVM Switch's keyboard/mouse data is automatically deleted after transmission and automatically purged when the KVM port focus is switched

Security Management


- Supports administrative configuration of CAC Port filtering to accept or reject specific USB authentication devices
 Supports administrative configuration of keyboard / mouse ports filtering to reject specific USB HID devices
 Provides administrative functions for authorized administrators to audit KVM log data
 Supports enable / disable CAC function by port

• Superior Video Quality and Flexible Connectivity


- $_{\circ}$ Superior video quality up to 5K (5120 x 2880 @ 60Hz) 3
- DisplayPort / HDMI combo connectors support DisplayPort and HDMI video interfaces (both PC and Console sides)
 Video DynaSync™ exclusive ATEN technology eliminates boot-up display problems and optimizes resolutions when switching among different sources

- Note:
 1. The Remote Port Selector is not supplied in the package and requires a separate purchase.
 2. Only analog speaker data input is supported.
 3. Supports video output resolutions up to 5120 × 2880 @ 60Hz, 5120 × 2160 @ 60Hz, 5120 × 1440 @ 60Hz/120Hz/144Hz, 3840 × 2160 @ 60Hz/120Hz/144Hz

Diagram

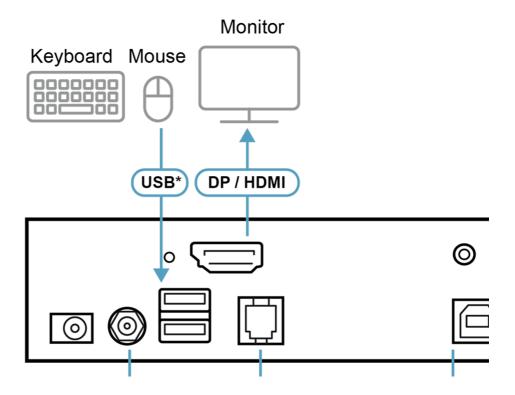



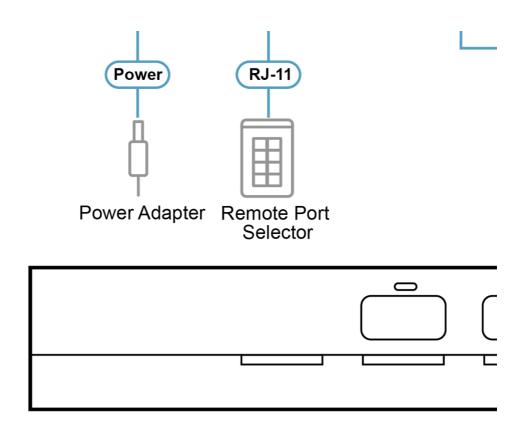

*USB Keyboard / Mouse **USB CAC

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

