

VS184A

4-Port 4K HDMI Splitter







The VS184A is a 4-Port HDMI video splitter that delivers up to 4K@30 resolution from a single HDMI source to four HDMI displays simultaneously, ensuring reliable content sharing in home entertainment, educational, and commercial setups such as studios, offices, classrooms, retail stores, and more.

One Source. 4-Way Video Distribution

The splitter accepts input from an HDMI device – such as a PC, laptop, media player, and more – and streams the AV content to up to four HDMI-enabled displays, making it suitable for both consumer and professional applications.







Pristine 4K Clarity

The VS184A supports Ultra HD resolutions up to 4K (3840 \times 2160 @ 30Hz, 4:4:4), delivering crystal-clear detail.

Flexible Long-Distance Cabling

The VS184A allows flexible cabling, with connections up to 3 meters (using 2L-7D03H) to an HDMI source and up to 15 meters (using 2L-7D15H) to each HDMI display, delivering data rates of up to 10.2 Gbps.



Applications

The video splitter is ideal for applications that require seamless distribution of pristine audiovisual content across multiple displays, ensuring a stunning viewing experience in any AV setup.


1. 2. 3. 4. 5.





Superstore



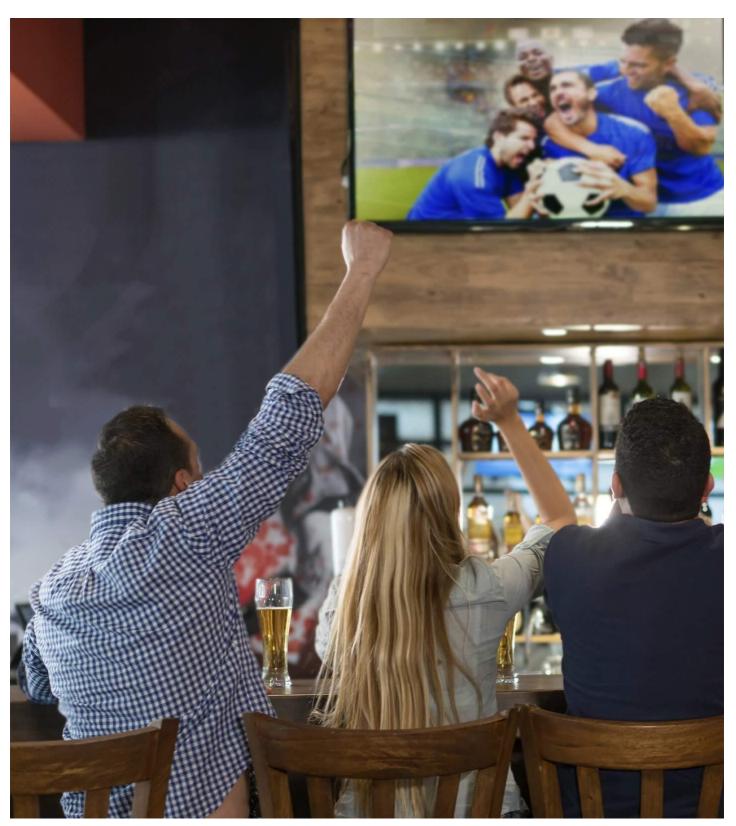


Sports Bar






Station



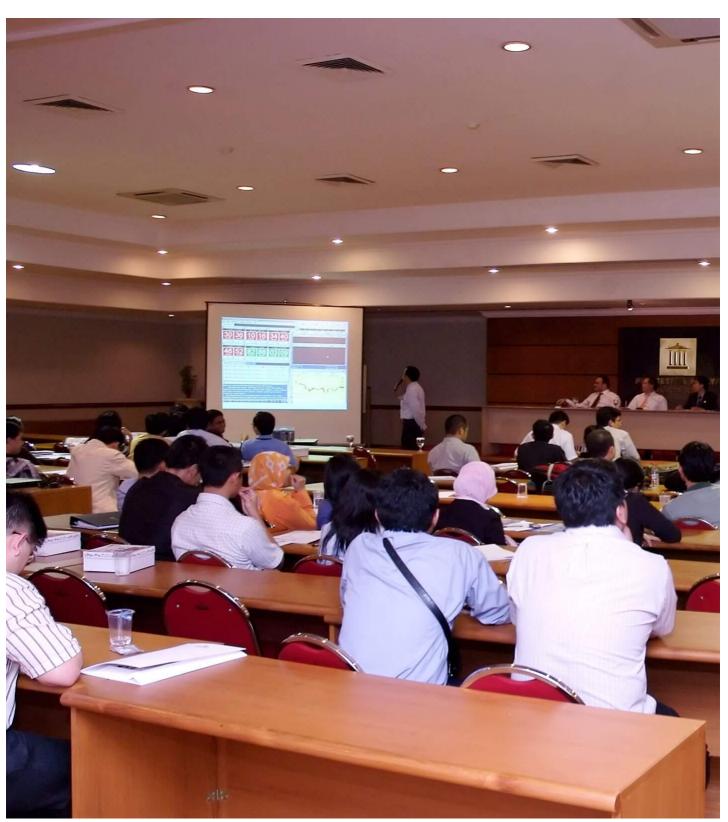

Lecture Hall



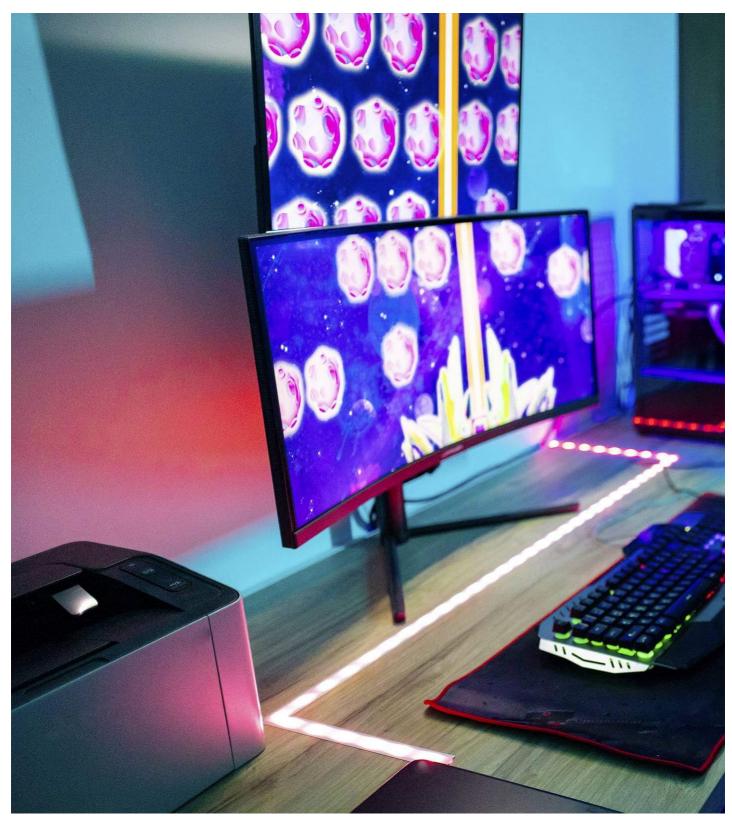


Live Game Streaming

Previous Next

Commitment to Best Quality

Each product is rigorously tested under diverse environmental conditions to ensure high-quality, reliable, and cost-effective performance for our customers.



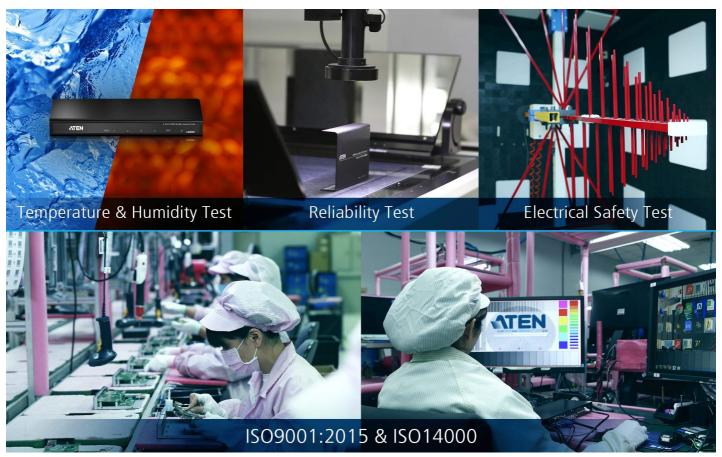

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name *		
Last Name *		
- Country *		v
Company *		
Email *		
Phone Number		
- Customer Type *		<u>_</u>
Job Title *		













The VS184A HDMI Splitter is the perfect solution for anyone who needs to send one source of digital high definition video to four displays at the same time. It supports all HDMI-enabled equipment, such as DVD players, satellite set-top boxes and all HDMI displays.

The VS184A HDMI Splitter is HDCP (High Bandwidth Digital Content Protection) compliant, making it effective for use with all HDMI displays in home theater applications, as well as in corporate, educational and commercial settings.

- Connects one HDMI source to four HDMI displays at the same time
 HDMI (3D, Deep Color, 4K); HDCP Compatible
 Supports resolutions of up to Ultra HD 4k × 2k
 Supports Dolby True HD and DTS HD Master Audio
 Long distance transmission up to 15 m (24 AWG)
 Supports max. data rate of 10.2 Gbps
 Plug-and-play no software installation required


Note: Long distance transmission up to 20m (with ATEN 2L-7D20H)

Specifications

Video Input	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	3m @3840x2160@30 (4:4:4)
Video Output	
Interfaces	4 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	15m @3840x2160@30 (4:4:4)
Video	
Max. Data Rate	10.2 Gbps (3.4 Gbps Per Lane)
Max. Pixel Clock	340 MHz
Compliance	HDMI (3D, Deep Color, 4K); HDCP Compatible
Max. Resolution	Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)
Audio	
Input	1 x HDMI Type A Female (Black)
Output	4 x HDMI Type A Female (Black)
Connectors	
Power	1 x DC Jack
Power Consumption	DC5.3V:6.02W:28BTU/h
	Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0.50 °C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.47 kg (1.04 lb)
Dimensions (L x W x H)	20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.
-	



Diagram

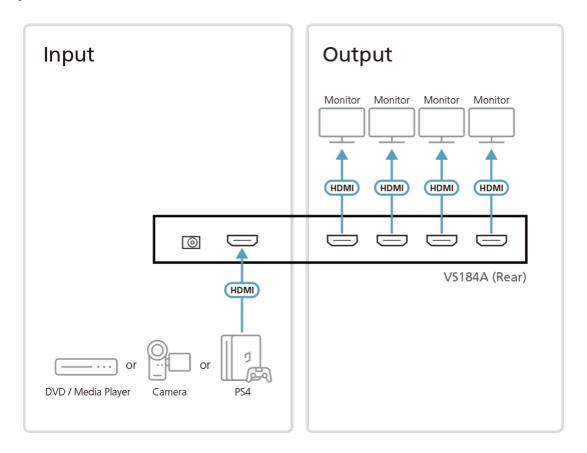

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

