

**UC232C**

USB-C to RS-232 Adapter (45 cm)



## USB-C to Serial Adapter

USB-C to RS-232 Adapter 45cm

UC232C



USB-C



RS-232



Anti-EMI




Compatible with  
**Windows 10, 8, 7 / macOS / Linux**

**Multi-System Support**

The UC232C is compatible with multiple operating systems, such as macOS, Linux, and Windows 7/8/10.

**Stable Performance, Fast Transmission**

The UC232C offers USB 2.0 connectivity and is equipped with a robust cable that ensures proven anti-EMI performance for reliable signal transmission at speeds of up to 921.6 Kbps baud rate.

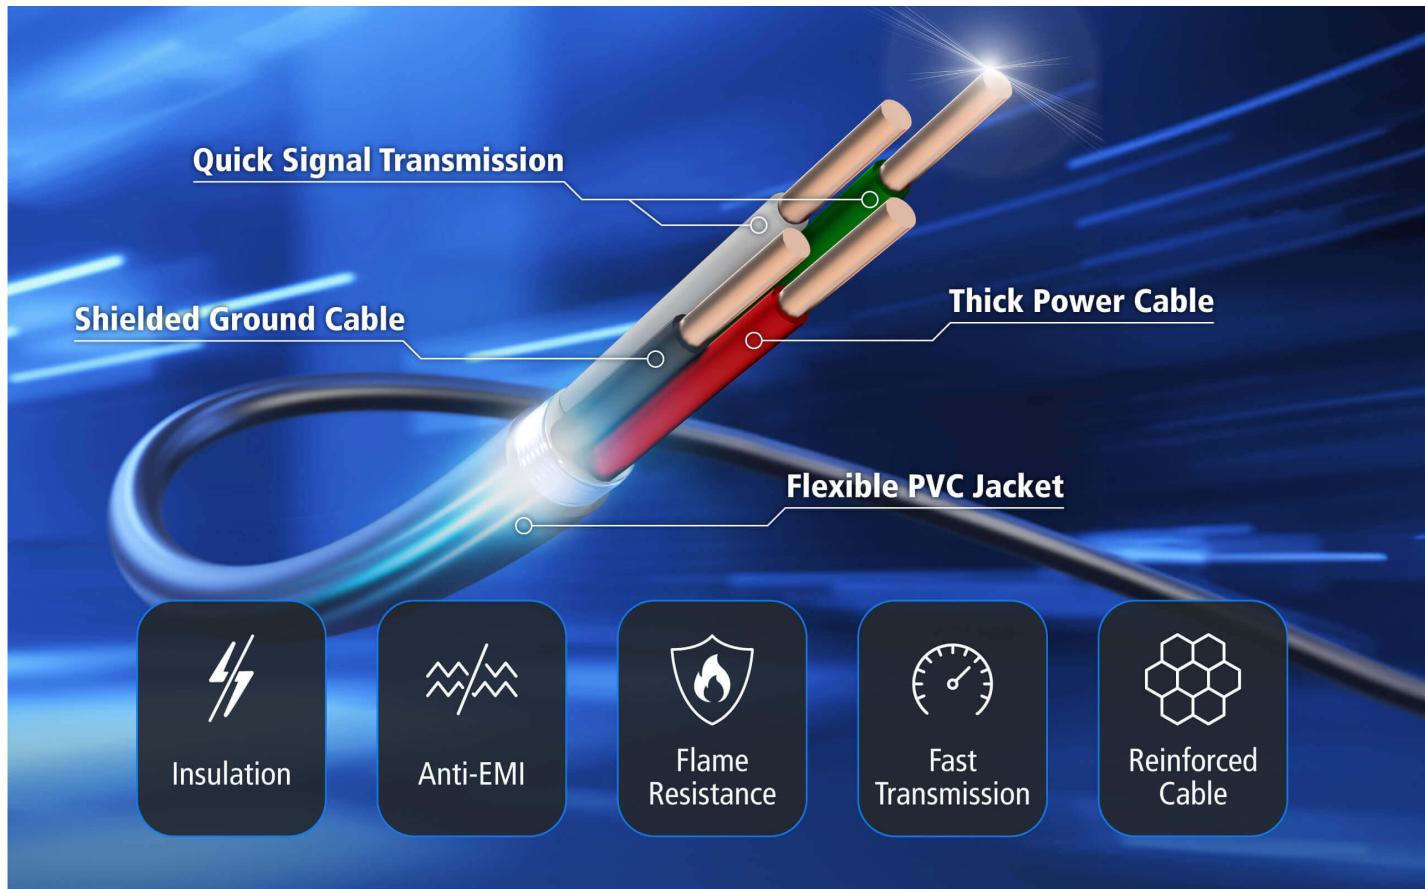

## USB-C



Laptop



PC

## RS-232



Modem



Network Switch



PLC Controller



Printer



Scanner



POS





Simply Better Connections

#### **Broadly Compatible with Serial Devices**


The UC232C allows your PC or laptop to control and communicate with various RS232 serial devices such as modem, network switch, PLC controller, printer, scanner, POS and so on.

#### **Applications**

- 1.
- 2.
- 3.
- 4.



Barcode Scanning

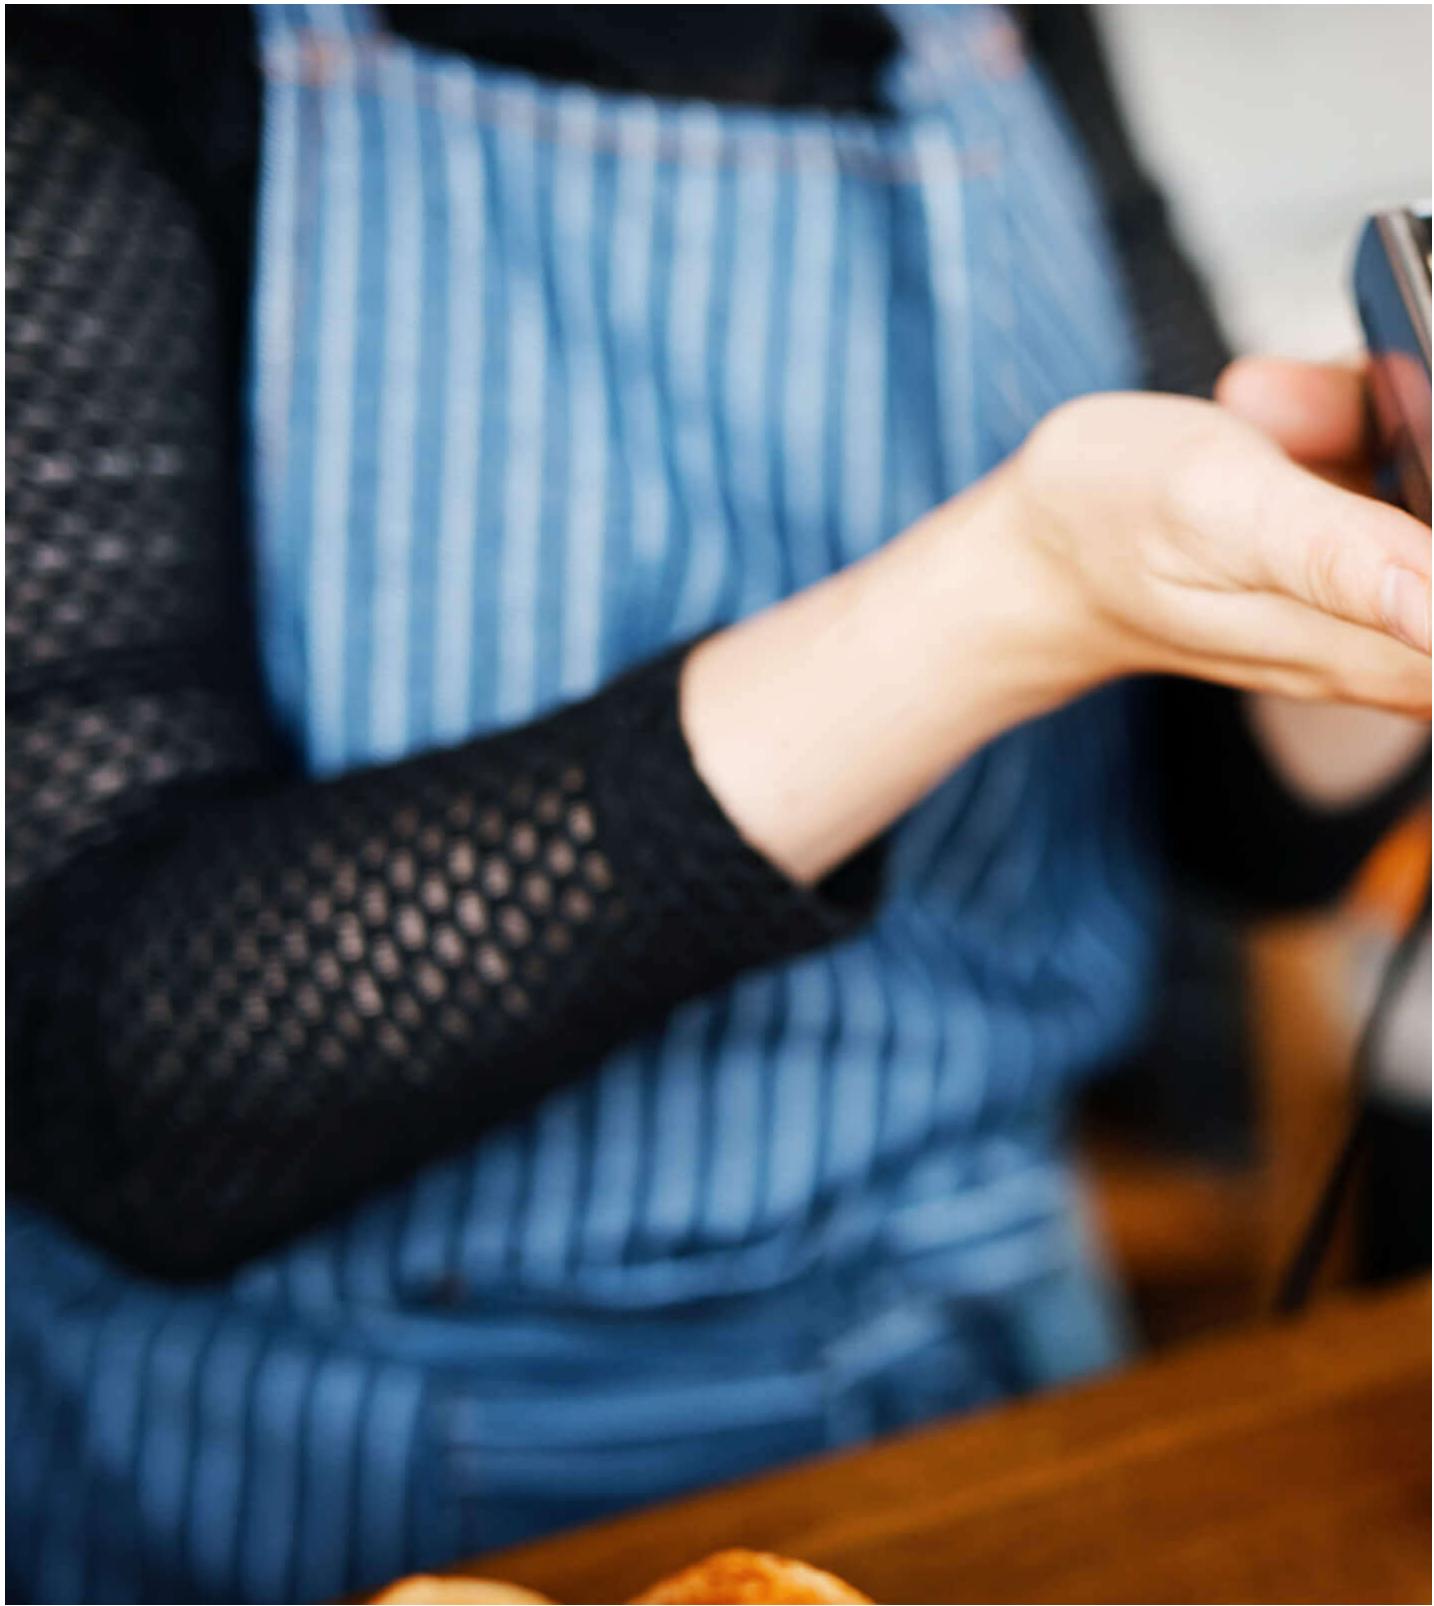

POS Terminal



PLC Programming

**Medical / Scientific Instrument**[Previous](#) [Next](#)**Product Comparison**

The UC232 lineup is well-suited for a variety of applications including industrial automation, IT networking, and control systems.

\*Notes: Models equipped with FTDI chip provide better signal transmission with legacy Windows OS.

[Talk to Our Experts](#)

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*

Company \*

Email \*

Phone Number \*

- Customer Type \*

Job Title \*



RS-232  
Functionality

Bus-  
Powered



#### Features


The UC232C is a USB-C to RS-232 adapter that enables legacy serial device connectivity for laptops / PCs without a COM / DB-9 serial port. Supporting both Windows and Mac platforms with data transfer rates up to 921.6 Kbps for rapid performance, it serves as a convenient connectivity solution for industrial automation systems, scientific instrument, point of sale systems, and any specialized industrial and consumer applications.

- Supports RS-232 serial interface
- Excellent anti-electromagnetic interference (anti-EMI) capability for stable transmission performance
- Full compliance with USB specifications
- Supports up to 921.6 Kbps data transfer rates
- OS Compatibility: Windows, Mac, and Linux
- Works with legacy serial devices

## Specifications

Connectors	
USB Port	1 x USB Type C Male
Serial	1 x DB-9 Male
Data Rate	Up to 921.6 Kbps
Cable Length	45cm
LEDs	Power (Orange)
Power Mode	Bus Powered
USB Specification	USB compliant
Power Consumption	DC5V:0.13W:1BTU/h  Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0–40°C
Storage Temperature	-20–60°C
Humidity	0–80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.04 kg ( 0.09 lb )
Dimensions (L x W x H)	6.59 x 3.40 x 1.60 cm (2.59 x 1.34 x 0.63 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

## Diagram

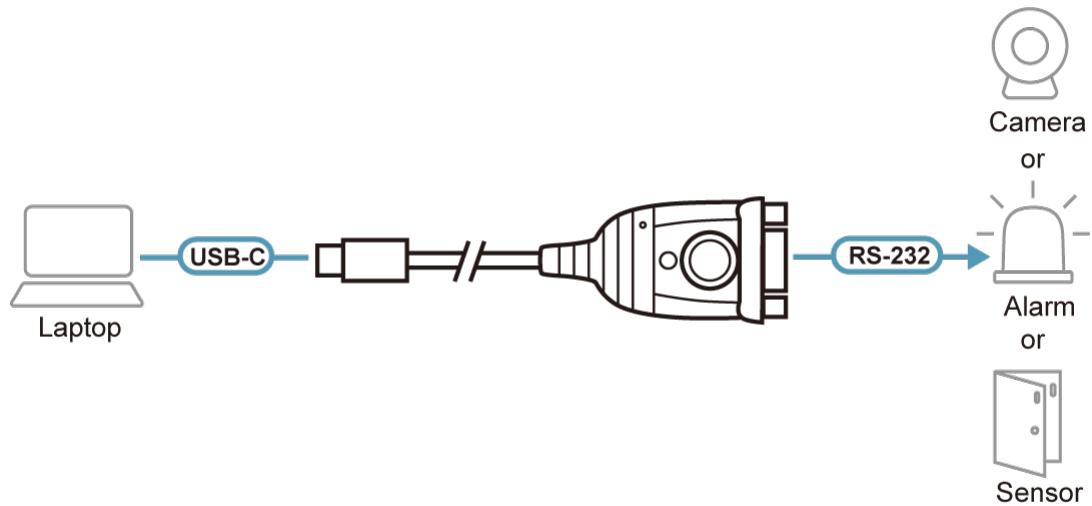



Simply Better Connections

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© 2009 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.