

## UC3008

USB-C to 4K HDMI Adapter



The UC3008 is a USB-C to HDMI 4K adapter that allows you to transfer the video of your USB-C equipped laptop, tablet or computer to a HDMI 4K display or projector. The UC3008 supports high video resolutions up to 4K so that you can conveniently scale your display output to a bigger monitor or do presentations from a projector.



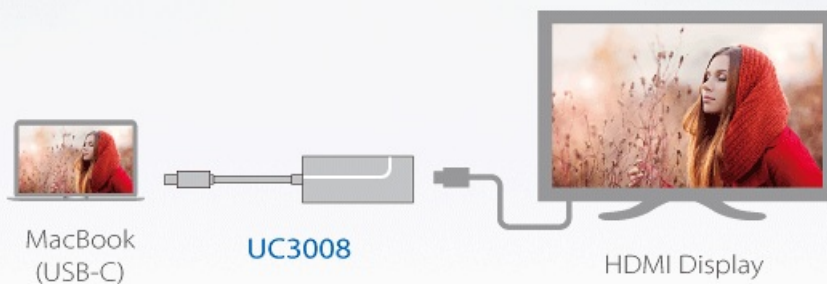
### Features

- Transfer high-quality video from a USB-C equipped laptop or tablet to a HDMI 4K display or projector
- [Compatible with the latest USB-C equipped laptops and tablet computers, including MacBook, Chromebook Pixel™ and Thunderbolt™ 3 devices](#)
- USB billboard feature proactively notifies users of alternate USB-C modes supported by the source device
- Premium manufacturing and high-quality design resists signal interference during video transmission
- Plug and Play – no software required
- Works with all major operating systems: Windows®, OS X®, and i-Pad Pro\*

\*Support iPad Pro video output and USB keyboard only

## Specifications

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Video Input            |                                                                                                                                 |
| Interfaces             | 1 x USB-C Male (White)                                                                                                          |
| Video Output           |                                                                                                                                 |
| Interfaces             | 1 x HDMI Type A Female (Black)                                                                                                  |
| Video                  |                                                                                                                                 |
| Max. Pixel Clock       | 300MHz                                                                                                                          |
| Max. Resolution        | 3840x2160@30Hz,                                                                                                                 |
| Compliance             | USB3.1 Type-C with DP Alt Mode (Thunderbolt™ 3 Compatible), USB Billboard Device Class, HDCP 1.4, HDMI 1.4b                     |
| Audio                  |                                                                                                                                 |
| Output                 | 1 x HDMI Type A Female (Black)                                                                                                  |
| Environmental          |                                                                                                                                 |
| Operating Temperature  | 0 - 40 °C                                                                                                                       |
| Storage Temperature    | -20 – 60 °C                                                                                                                     |
| Humidity               | 0 - 80% RH, Non-Condensing                                                                                                      |
| Physical Properties    |                                                                                                                                 |
| Housing                | Plastic                                                                                                                         |
| Weight                 | 0.03 kg ( 0.07 lb )                                                                                                             |
| Dimensions (L x W x H) | 7.00 x 2.70 x 1.50 cm<br>(2.76 x 1.06 x 0.59 in.)                                                                               |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

**Diagram****ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.