

CL5716

16-Port PS/2-USB VGA LCD KVM Switch with Daisy-Chain Port and USB Peripheral Support



Specification


16-Port Slideaway™ LCD KVM Switch

Function	CL5716M	CL5716N
Computer Connections		
Direct	16	16
Maximum	512 (via Daisy-chain)	512 (via Daisy-chain)
Port Selection	OSD, Hotkey, Pushbuttons	OSD, Hotkey, Pushbuttons
Connectors		
External Console Ports	1 x SPHD-18 Male (Yellow)	1 x SPHD-18 Male (Yellow)
KVM Ports	16 x SPHD-15/17 Female (Yellow)	16 x SPHD-15/17 Female (Yellow)
Daisy Chain Ports	1 x DB-25 Male	1 x DB-25 Male
Firmware Upgrade	1 x RJ-11 Female	1 x RJ-11 Female
Power	1 x 3-prong AC Socket	1 x 3-prong AC Socket
External Mouse Port	1 x USB Type A Female	1 x USB Type A Female
Switches		

Port Selection	2 x Pushbutton	2 x Pushbutton
Station Selection	2 x Pushbutton	2 x Pushbutton
Reset	1 x Semi-recessed Pushbutton	1 x Semi-recessed Pushbutton
Firmware Upgrade	1 x Switch	1 x Switch
Power	1 x Rocker Switch	1 x Rocker Switch
LCD Adjustment	4 x Pushbutton	4 x Pushbutton
LCD On/Off	1 x LED Pushbutton	1 x LED Pushbutton
LEDs		
Online	16 (Orange)	16 (Orange)
Port ID	2 (Yellow)	2 (Yellow)
Station ID	2 (Yellow)	2 (Yellow)
Power	1 (Dark Green)	1 (Dark Green)
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
Panel Spec		
LCD Module	17" TFT-LCD	19" TFT-LCD
Resolution	1280 x 1024 @ 75 Hz	1280 x 1024 @ 75 Hz
Response time	5 ms	5 ms
Viewing Angle	170° (H), 160° (V)	170° (H), 160° (V)
Pixel Pitch	0.264 mm x 0.264 mm	0.294 mm x 0.294 mm
Support Color	16.77M colors	16.77M colors
Contrast Ratio	1000:1	1000:1
Luminance	250 cd/m ²	250 cd/m ²
Emulation		
Keyboard / Mouse	PS/2, USB	PS/2, USB
Video		
Input Video Resolution	1920 x 1200 @ 60 Hz	1920 x 1200 @ 60 Hz
Second console	1920 x 1200 @ 60 Hz	1920 x 1200 @ 60 Hz
Scan Interval	1-255 seconds	1-255 seconds
Maximum Input Power Rating	100-240V AC, 50/60Hz, 1A	100-240 VAC, 50/60Hz, 1A

Power Consumption	AC110V:24.7W:129BTU AC220V:25.8W:134BTU	AC110V:26.9W:139BTU AC220V:27.9W:144BTU
Environmental		
Operating Temperature	0-50°C	0-50°C
Storage Temperature	-20-60°C	-20-60°C
Humidity	0-85% RH, Noncondensing	0-85% RH, Noncondensing
Physical Properties		
Housing	Metal + Plastic	Metal + Plastic
Weight	13.59 kg (29.93 lb)	13.65 kg (30.07 lb)
Dimensions (L x W x H)	48.00 x 64.27 x 4.40 cm (18.9 x 25.3 x 1.73 in.)	48.00 x 68.92 x 4.40 cm (18.9 x 27.13 x 1.73 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	

Diagram

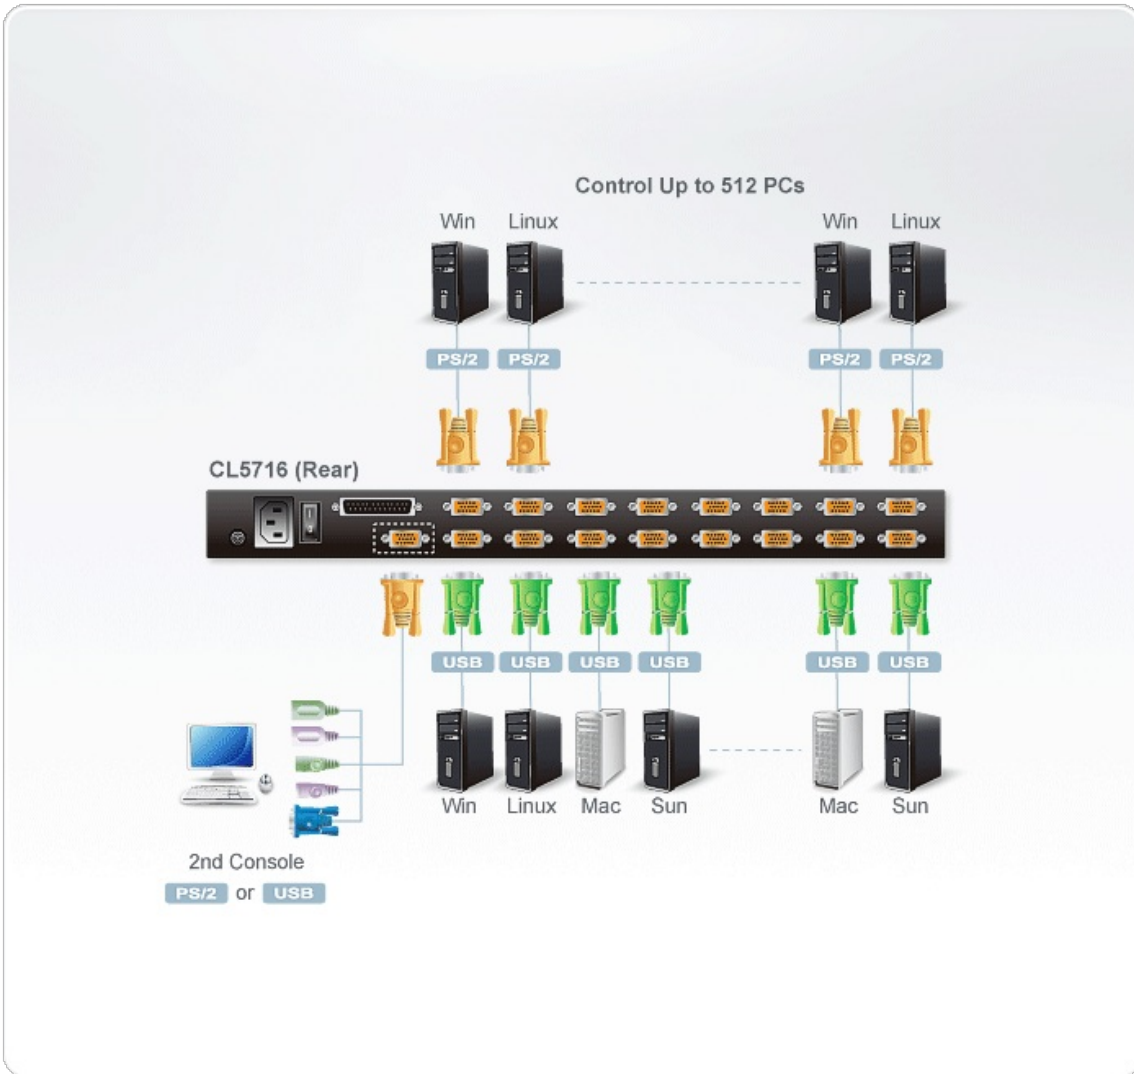

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.