

PN9108U

8-Port Power Over the NET™



The [PN9108](#) Power over the NET™ is a control unit that provides remote power management for eight AC outlets via a TCP/IP connection, allowing administrators to control the power off, power on, and reboot status for each attached device from any computer connected to the Internet, whether down the hall, or half way around the world. The [PN9108](#) is the most convenient, reliable and cost effective way to obtain access to your server room remotely.


Features

- Remote power on / off / reboot control for eight outlets via TCP/IP and a built in 10/100 Ethernet port
- Local power on / off / reboot control via the [PN9108](#)'s RS-232 port to the computer's RS-232 port
- Daisy chain up to 15 additional stations to control up to 128 outlets
- Manual switching between Local and Remote access for each port via front panel push button switches
- Individual control of each port - users can set the power on sequence and delay time for each port to allow equipment to be turned on in the proper order
- Easy setup and operation via a browser interface
- Provides three configuration/management methods: Browser; Telnet; or Console Terminal
- Safe shutdown and rebooting for Windows systems*
- Overcurrent protection and recovery for each AC port (110 V model only) plus total port overcurrent protection (both models) - remote users can monitor the outlet status via the GUI interface on their browsers
- Separate circuits for the unit's power and the power to the devices - the power control status menu is still accessible even when an overload condition trips the devices' circuit breaker
- Cumulative load measurement - remote users can view load information in amperes via the GUI on their browsers
- On/Off scheduling - allows everything from a one-time start/shutdown, to daily, weekly, etc. starts/shutdowns at user-specified times
- Port grouping - perform the same action on a specified group of ports
- Current Display for easy current status monitoring
- Out of Band (OOB) operation via terminal or dialup connection
- Two level (Administrator and User) security
- Detachable front panel for convenient rack mounting
- UL/TUV approved
- Multiplatform support: Windows 2000/XP/[Vista](#), Linux, Unix and FreeBSD.
- **Network Interfaces:** TCP/IP, PPP, UDP, HTTP, HTTPS, SSL, SMTP, DHCP, ARP, NTP, DNS, Telnet, 10Base-T/100Base-TX, auto sense, Ping

*Safe shutdown and rebooting is supported if the Power Monitor utility has been installed

- For more information about KVMs which can connect to [PN9108](#), see [Compatible KVM Table](#)

Diagram

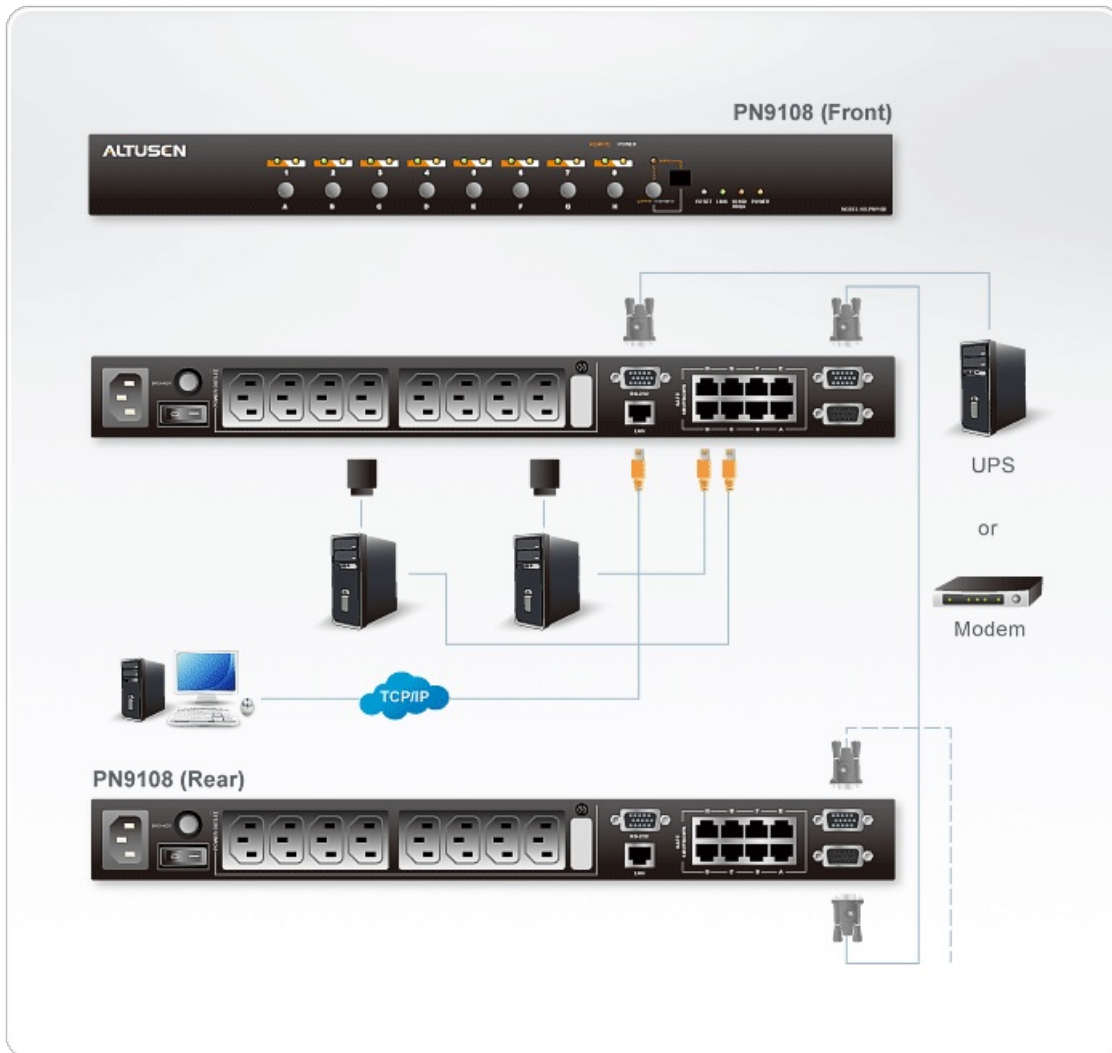

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.