


## VC965

DisplayPort to DVI Adapter

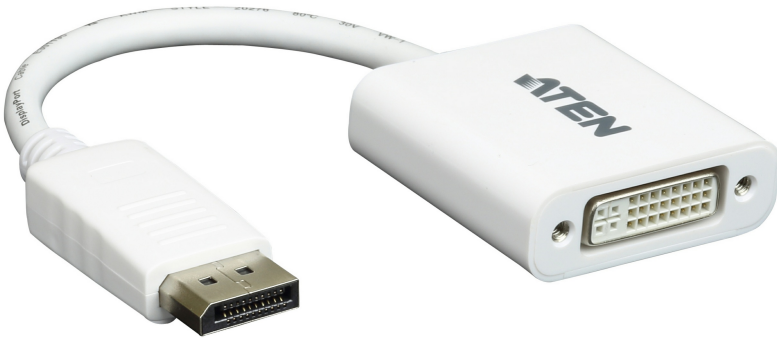

**Plug-n-Play**

No installation software or drivers required. The VC965 is the perfect solution for connecting DisplayPort inputs to DVI output displays.

**Supports 1080p**

Supports resolutions up to 1080p, making it highly compatible across devices.



## Contact Us


Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[Contact Sales](#)

### Superior Signal Quality

The internal copper foil shielding protection ensures signal integrity and minimizes external interference, giving you extra reliable and superior quality signals.

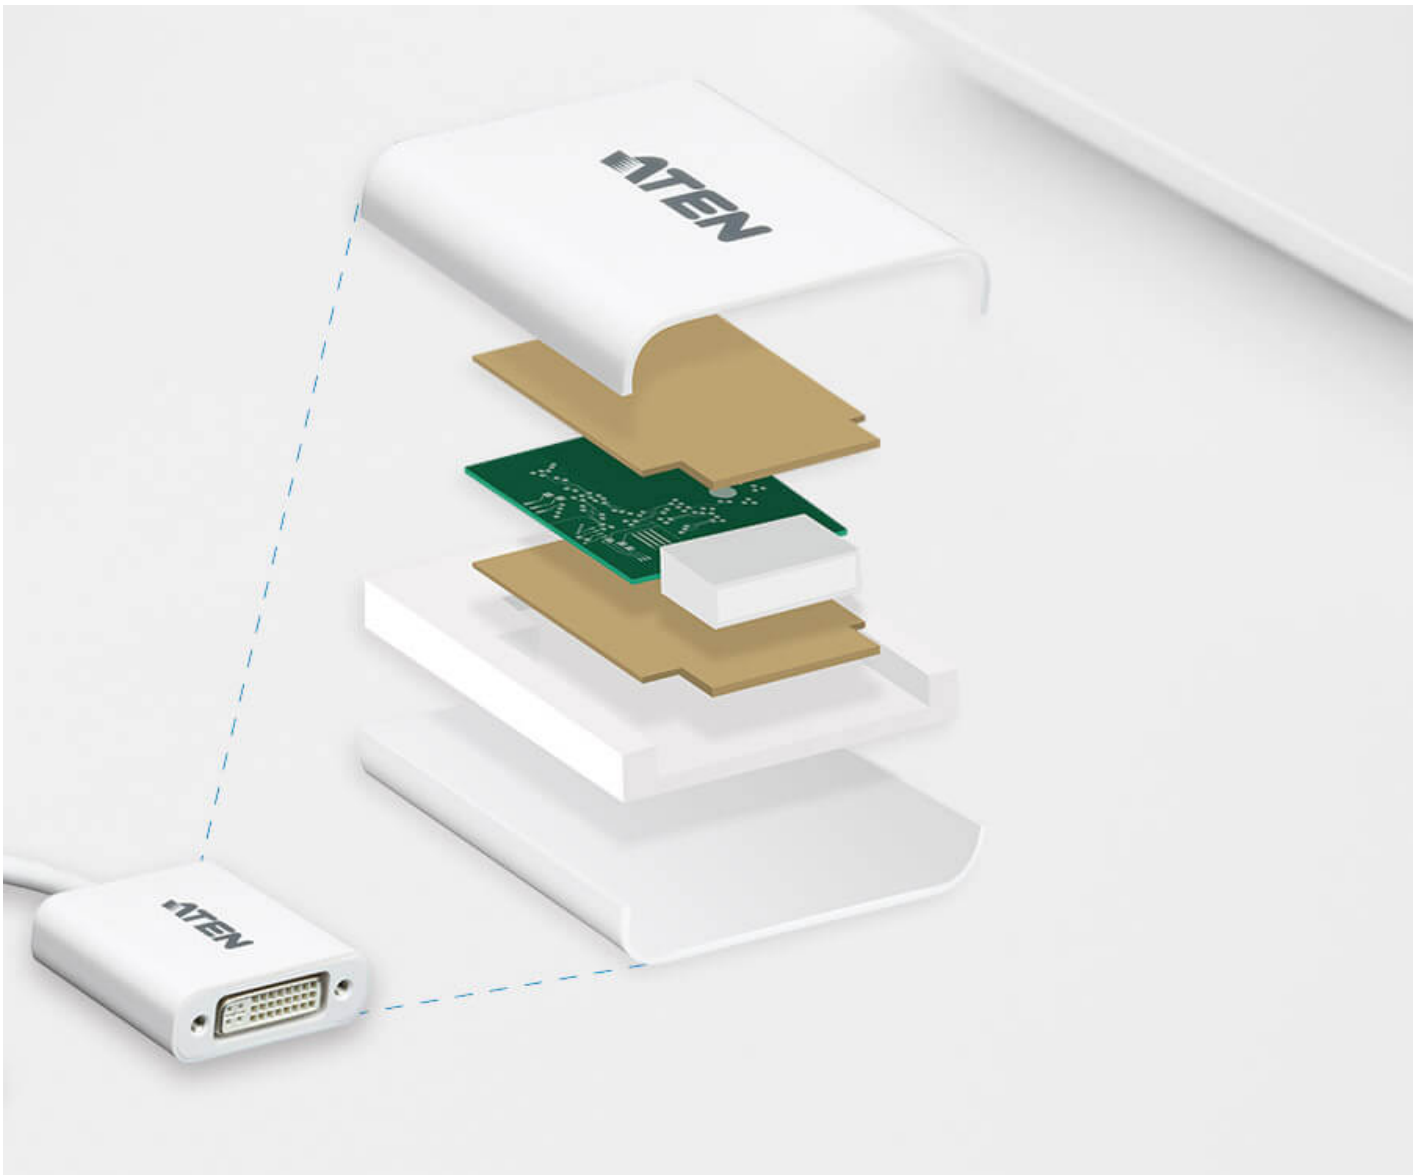

[Talk to Our Experts](#)

## Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*

Company \*

Email \*

Phone Number

- Customer Type \*

Job Title \*

---



## Features

The VC965 is a DisplayPort to DVI adapter, allowing you to connect your device's DisplayPort output to the DVI input of a TV or other display.


The VC965 provide a cost-effective yet high performance signal conversion solution. This adapter is therefore perfect for computers and notebooks, supporting display resolutions of up to 1080p (1920x1080@60Hz).

- Converts DisplayPort signals to DVI output
- DisplayPort 1.2 a compliant
- Supports VGA, SVGA, XGA, SXGA, UXGA and resolutions up to 1080p (HDTV)
- No software or driver installation required

## Specification

|                        |   |
|------------------------|---|
| Video Input            |   |
| Interfaces             | 1 x DisplayPort Male (White)  |
| Video Output           |   |
| Interfaces             | 1 x DVI-I* Female (White)<br>*Only support digital signal transmission  |
| Video                  |   |
| Max. Pixel Clock       | 165 MHz   |
| Max. Resolution        | Input up to 4096 x 2160@60Hz (4:4:4)<br>Output up to 1920 x 1080  |
| Compliance             | DP 1.2  |
| Environmental          |   |
| Operating Temperature  | 0 - 50 °C   |
| Storage Temperature    | -20–60 °C   |
| Humidity               | 0 - 80% RH, Non-Condensing  |
| Physical Properties    |   |
| Housing                | Plastic   |
| Weight                 | 0.04 kg ( 0.11 lb )   |
| Dimensions (L x W x H) | 18.00 x 4.50 x 1.50 cm<br>(7.09 x 1.77 x 0.59 in.)  |
| Carton Lot             | 40 pcs  |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

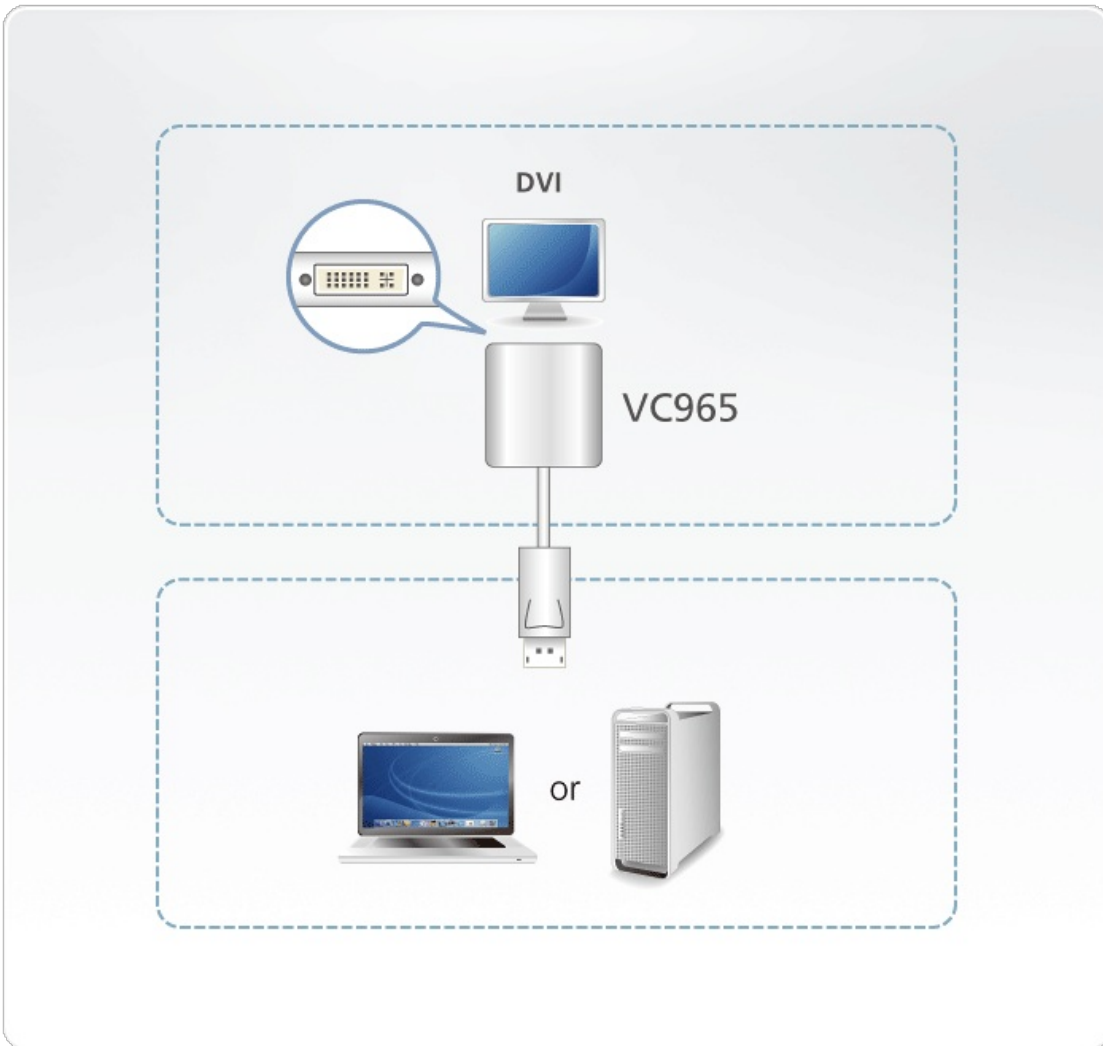

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.