

**VC981**

4K Mini DisplayPort to HDMI Active Adapter



## Mini DisplayPort to HDMI Active Adapter



**4K30**  
Refresh  
Rate

DisplayPort 1.2a compliant



Built-in chip ensures high quality signal conversion,  
smooth output, and compatibility with DP++.

**Plug-n-Play**

No installation software or drivers required. The VC981 is the perfect solution for connecting DisplayPort inputs to HDMI output displays. The built-in chip ensures high quality signal conversion, smooth output, and compatibility with DP++.

**Supports 4K**

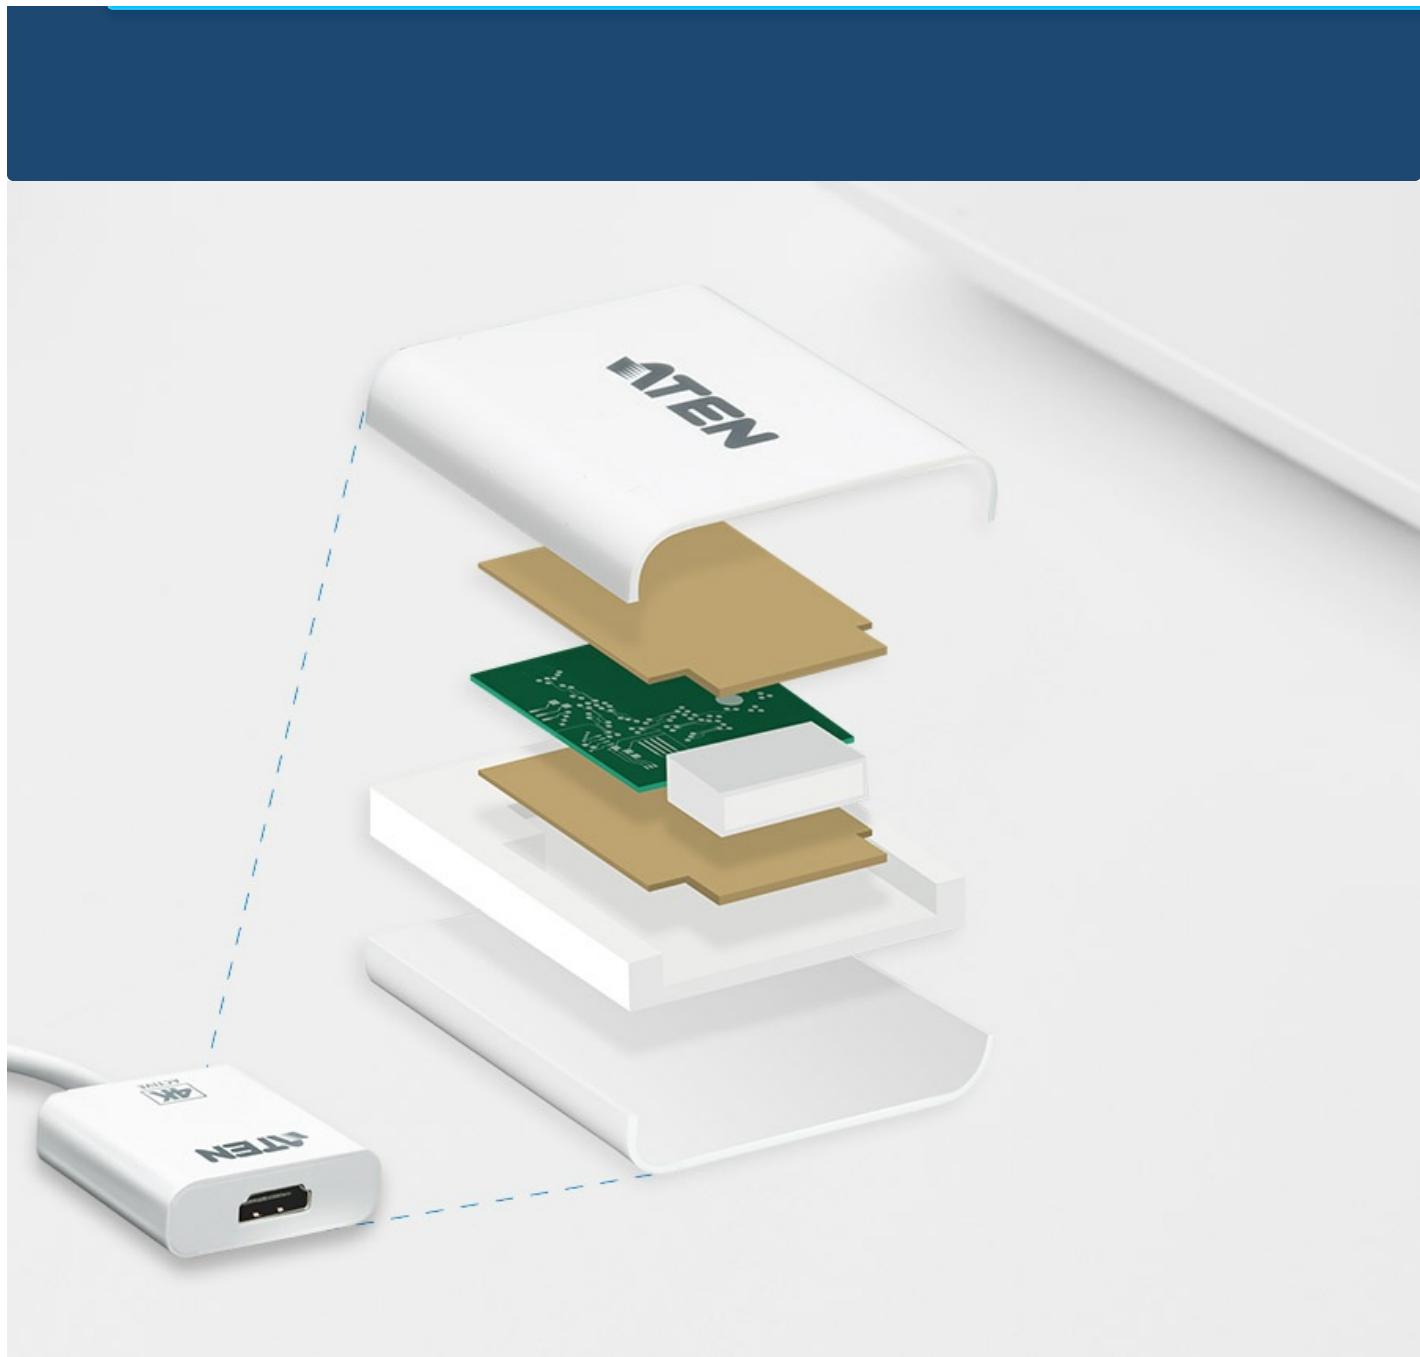
Supports resolutions up to 4K, making it highly compatible across devices.

**4K**

## Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)[Contact Sales](#)

**Superior Signal Quality**

The internal copper foil shielding protection ensures signal integrity and minimizes external interference, giving you extra reliable and superior quality signals.

**AMD Eyefinity Compatible**

Compatible with AMD Eyefinity graphics cards for multiple display applications.



## Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*

Company \*

Email \*

Phone Number \*

- Customer Type \*

Job Title \*



#### Features

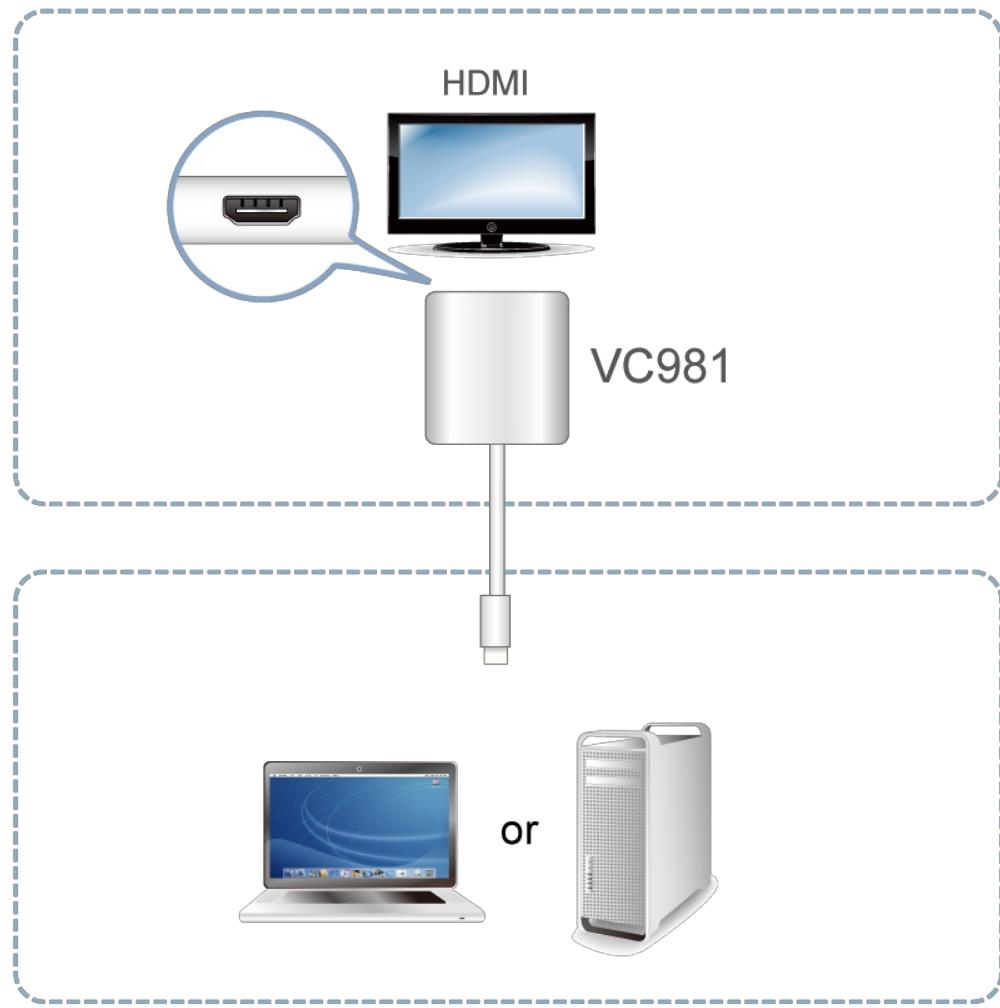
The VC981 is an active Mini DisplayPort to HDMI adapter that allow you to connect your Mini DisplayPort/DisplayPort output device to the HDMI input of a 4K TV or other display.

The ATEN VC981 is an active adapter, featuring advanced chips which ensure stable video signal conversion even when the video source does not support dual-mode DisplayPort (DP++)\*. Moreover, support for resolutions up to 4K make this adapter ideal for users who require a high performance signal conversion solution.

- Converts Mini DisplayPort signals to HDMI output
- Supports VGA, SVGA, XGA, SXGA, UXGA, 1080p and resolutions up to 4K UHD
- **Active adapter** – features an advanced chip which ensures stable video signal conversion even when the video source does not support dual-mode DisplayPort (DP++)\*
- **Supports AMD Eyefinity™ Technology (multi-screen setups)**
- Audio supported
- No software or driver installation required

**Specification**

Video Input	
Interfaces	1 x Mini DisplayPort Male (White)
Video Output	
Interfaces	1 x HDMI Type A Female (Black)
Video	
Max. Pixel Clock	297 MHz
Max. Resolution	3840 x 2160@30Hz, 1920 x 1200@60Hz.
Compliance	DP1.2a, HDMI(3D, Deep Color, 4K), HDCP 1.3
Audio	
Output	1 x HDMI Type A Female (Black)
Environmental	
Operating Temperature	0 - 50 °C
Storage Temperature	-20–60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.04 kg ( 0.09 lb )
Dimensions (L x W x H)	17.50 x 4.50 x 1.50 cm (6.89 x 1.77 x 0.59 in.)
Carton Lot	40 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

**Diagram**

**HDMI**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
[www.aten.com](http://www.aten.com) E-mail: [marketing@aten.com](mailto:marketing@aten.com)



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.