

VM5404H

4 x 4 HDMI Matrix Switch with Scaler



reddot award 2015
winner interface design



The VM5404H 4 x 4 HDMI Matrix Switch is a distinct HDMI solution that offers an easy and affordable way to route any of 4 HDMI video sources to any of 4 HDMI displays, with a quick view of all port connections via the front panel LCD.

The VM5404H includes seamless switching that employs a FPGA matrix architecture that ensures continuous video streams, real-time control and stable signal transmissions. With a built in high-performance scaler, the VM5404H easily converts various input resolutions into various output display resolutions, giving viewers the best video and picture quality across all displays. The switch integrates video wall functionality with an easy to use web GUI that lets you create 8 connection profiles that can be customized into different video wall layouts.

The VM5404H is an ideal solution for applications that require multiple HDMI displays with multiple HDMI sources to be conveniently setup in multiple locations, such as for stage presentations, competitions, control centers, and installations that require real-time reports.



Features

- Connects any of 4 HDMI sources to any of 4 HDMI displays
- Long Distance Transmission – supports up to 15 m (24 AWG)
- HDMI (3D, Deep color); HDCP 1.4 compatible
- **Seamless Switch™** – ATEN FPGA design unifies video formats to provide continuous video streams, real-time switching and stable signal transmissions*
- **Video Wall** –allows you to create custom video wall layouts via intuitive web GUI *
- **Scaler** – features a video scaling function to convert input resolutions to the optimum display resolutions
- **EDID Expert™** – selects optimum EDID settings for smooth power-up and highest quality display
- Multiple Control Methods – system management via front-panel pushbuttons, IR, RS-232 and Ethernet (Telnet / Web GUI) connections
- View and control via ATEN Video Matrix Control App in a swift and agile way
- **Features a built in high-performance scaler for the best image quality**
- Built-in bi-directional RS-232 serial port for high-end system control
- Superior video quality – HDTV resolution of 480p, 720p, 1080i and 1080p (1920 x 1080)
- ESD protection for HDMI
- Supports Dolby True HD and DTS HD Master audio
- Consumer Electronics Control (CEC) support
- Supports IR signals for remote control
- Firmware Upgradeable
- Rack Mountable (1U design)

* Note:


1. If Seamless Switch is enabled, the video output will not display 3D, Deep Color, or interlace (i.e., 1080i) resolution features. To use these features, you must disable Seamless Switch.
2. Videos may not display within range when Seamless Switch™ or Video Wall is enabled, in which case please adjust the display settings on your device.

Specification

Video Input	
Interfaces	4 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	3.0 m
Video Output	
Interfaces	4 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	15 m
Video	
Max. Data Rate	6.75 Gbps (2.25 Gbps Per Lane)
Max. Pixel Clock	225 MHz
Compliance	HDMI (3D, Deep Color) HDCP 1.4 Compatible Consumer Electronics Control (CEC)
Max. Resolution	Up to 1080p
Max. Distance	Up to 15 m
Control	
RS-232	Connector: 1 x DB-9 Female (Black) Baud rate and protocol: Baud Rate: 19200, Data Bits: 8, Stop Bits:1, Parity: No, Flow Control: No

IR	1 x Mini Stereo Jack Female (Black)
Ethernet	1 x RJ-45 Female
EDID Settings	EDID Mode: Default / Port1 / Remix / Customized (EDID Wizard support)
Connectors	
Power	1 x 3-Prong AC Socket
Power	
Maximum Input Power Rating	100-240 VAC; 50-60 Hz; 1.0A
Power Consumption	AC110V:34.1W:160BTU/h AC220V:34.4W:161BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	4.05 kg (8.92 lb)
Dimensions (L x W x H)	43.24 x 26.23 x 4.40 cm (17.02 x 10.33 x 1.73 in.)
Carton Lot	1 pc
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

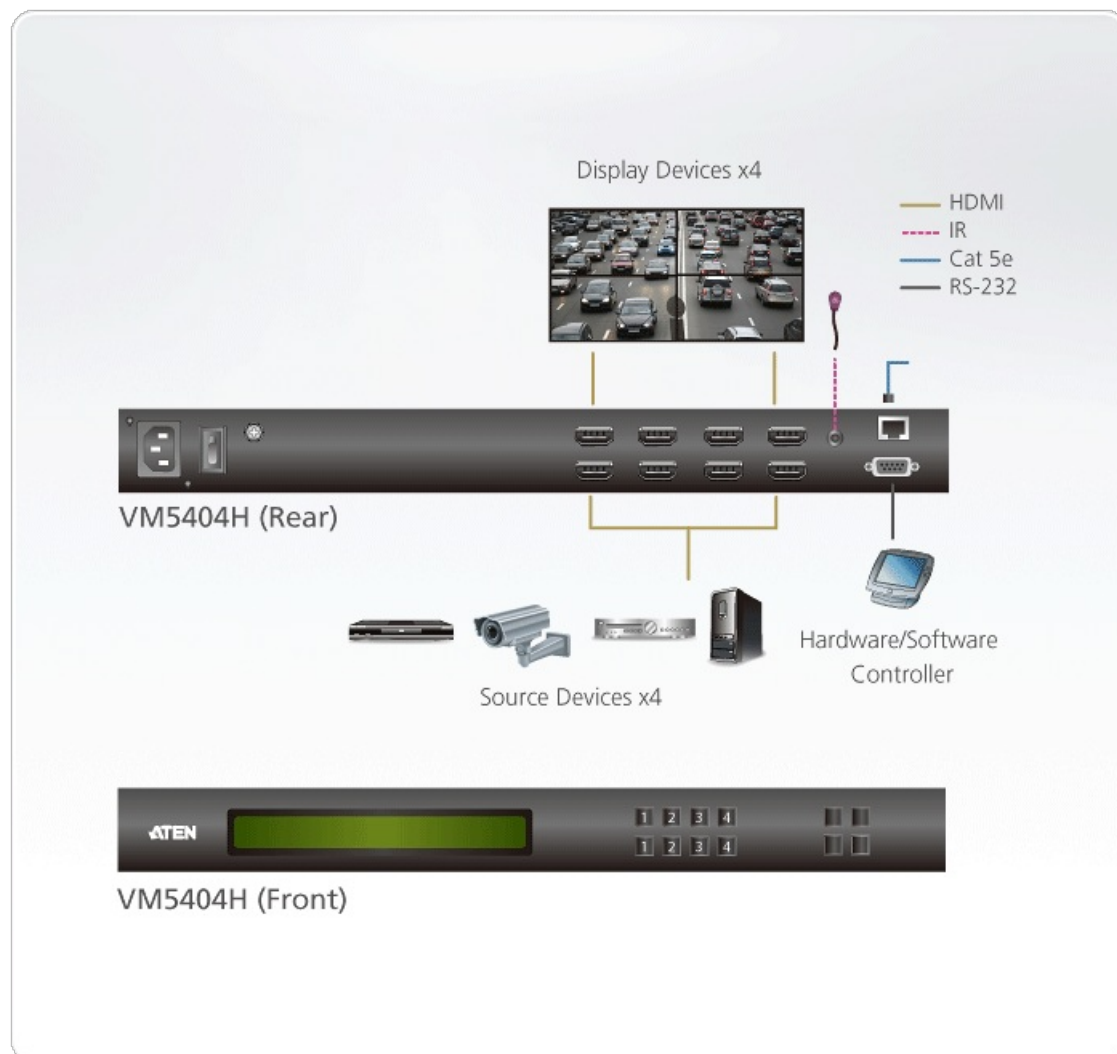

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.