

## UC3310

CAMLIVE MX UVC Camera Seamless Matrix



As meetings and conferences evolve in modernized workplaces, the need for versatile applications, such as the need to seamlessly switch between two UVC inputs to HDMI, is fast developing. The CAMLIVE MX optimizes the meeting and conference experience as it serves as an audio/video matrix with an extensive array of compatibilities and support. Leverage the full capacity of CAMLIVE MX to get the best meeting experience possible!

### USB AVSync™ with Seamless 4K Switching

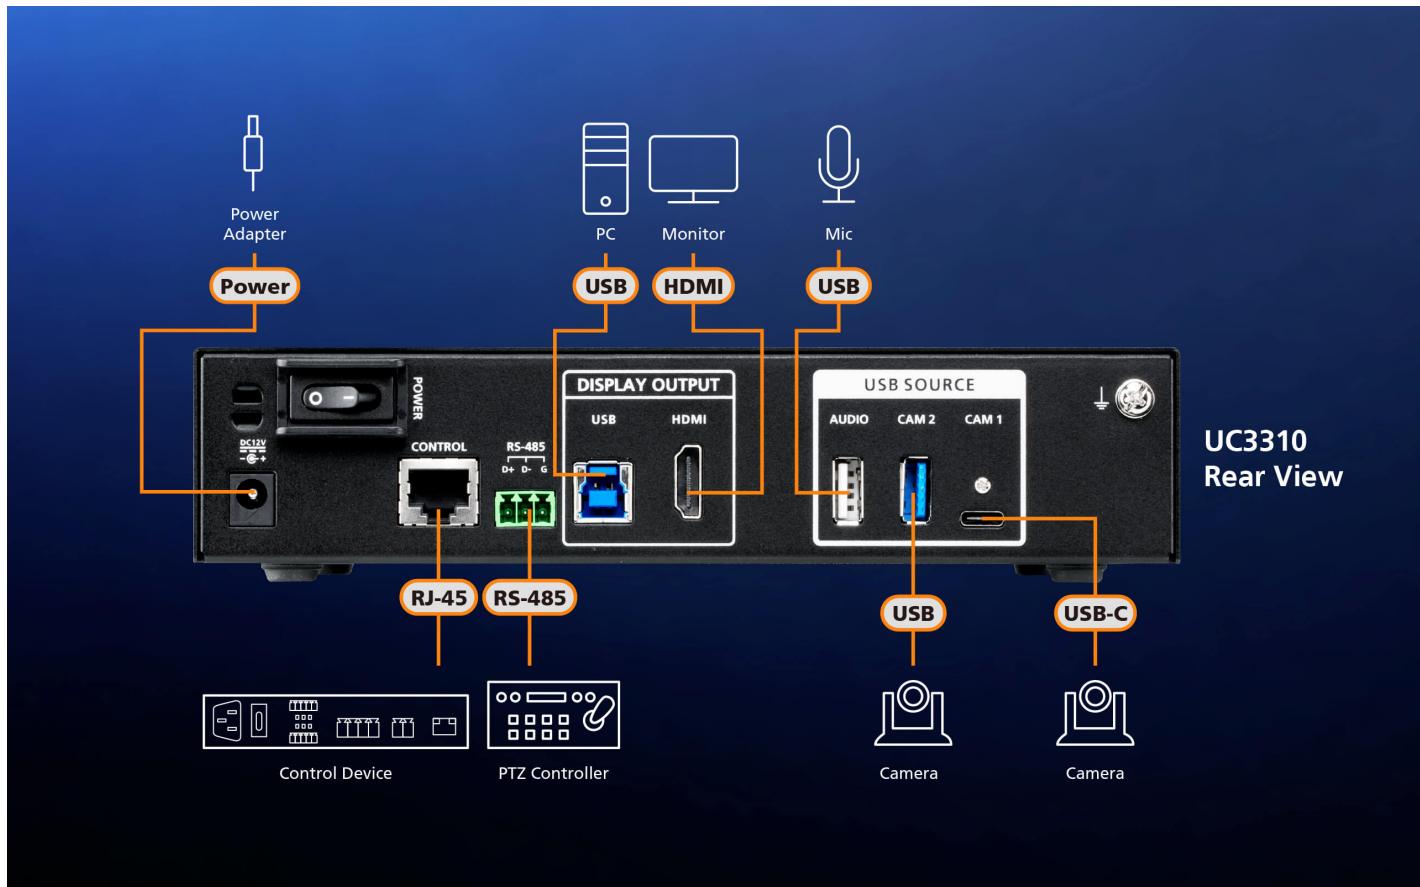
The UC3310 stands out as the sole UVC camera matrix on the market that enables flexible switching between two USB cameras (4K@30) for optimal HDMI visual clarity. ATEN's exclusive USB AVSync™ technology integrates zero-second USB video switching and UAFV (USB Audio Follow Video), and further presets the USB matrix path to play a role in different conference scenarios. This ensures BYOD devices stay effortlessly in sync with the meeting system – eliminating the need for any AV reconfiguration, leading to a smoother, more efficient meeting experience.



# USB x Seamless x Matrix

Independent 3x2 Audio/Video Matrix Switch

The advanced matrix supporting 3 audio and 2 video USB sources renders it to be a comprehensive and smooth system, delivering content of high clarity and detail.

**Wide and Expansive Compatibility of Meeting and Streaming Software**

The converted UVC video output stream is perfect for meeting software including: Microsoft Teams, Zoom, Google Meet, and Webex, while also compatible with popular streaming software: OBS, XSplit, YouTube, Facebook, GoToWebinar, and Twitch.

**Built-in RS-485 Interface for an Exceptional Meeting Experience**

Its support for VISCA protocol makes it compatible with a wide array of PTZ add-on cameras, ensuring an engaging and interactive meeting experience.

**PTZ Controller****Flexible and Versatile Deployment**

Optional rack mounting kits ([2X-052G](#), [2X-049G](#)) make installation easy and convenient, and additionally saves rack space for scalability purposes, such as media cabinets and DIT (Digital Imaging Technician) workstations.

**Applications**

The CAMLIVE MX encapsulates what is required for a modern meeting experience, but it can be further extended to these other applications:



Meeting Room

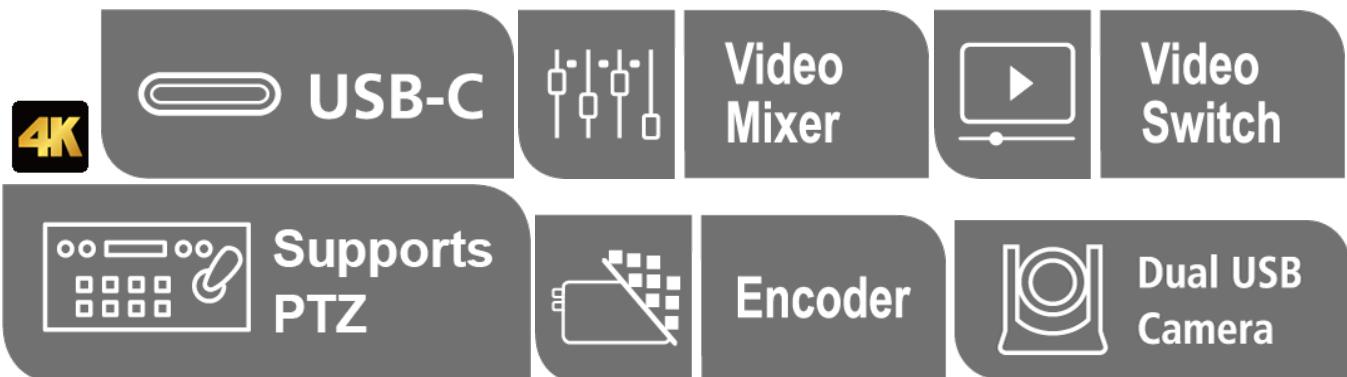


Conference Hall

**Talk to Our Experts**

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name *
Last Name *
- Country *
Company *
Email *
Phone Number *
- Customer Type *
Job Title *



#### Features

The CAMLIVE MX (UC3310) UVC Camera Seamless Matrix enables the conversion of up to two 4K @ 30 USB camera sources into one HDMI, allowing seamless switch among the sources. Besides, it features the encoding solution supporting 1080p@30 UVC output simultaneously for live broadcasting on popular streaming software such as Microsoft Teams, Zooms, OBS, XSplit, YouTube, Facebook, GoToWebinar, and Twitch, guaranteeing an engaging video conferencing experience with high quality images and sound.

Pushbuttons are built on the front panel for quick and intuitive signal selection. The RS-232 connection enables integration with ATEN VK series and other third-party control systems. The CAMLIVE MX also comes with RS-485 interface to support VISCA protocol for PTZ camera controller connection. An optional rack mount kit is available to give installation flexibility in media cabinets or DIT stations. The CAMLIVE MX delivers plug-and-play convenience with no software drivers needed. In addition, it runs on all major operating systems including windows 10 and macOS 10.1 for all users to customize video streams for various online meeting applications.

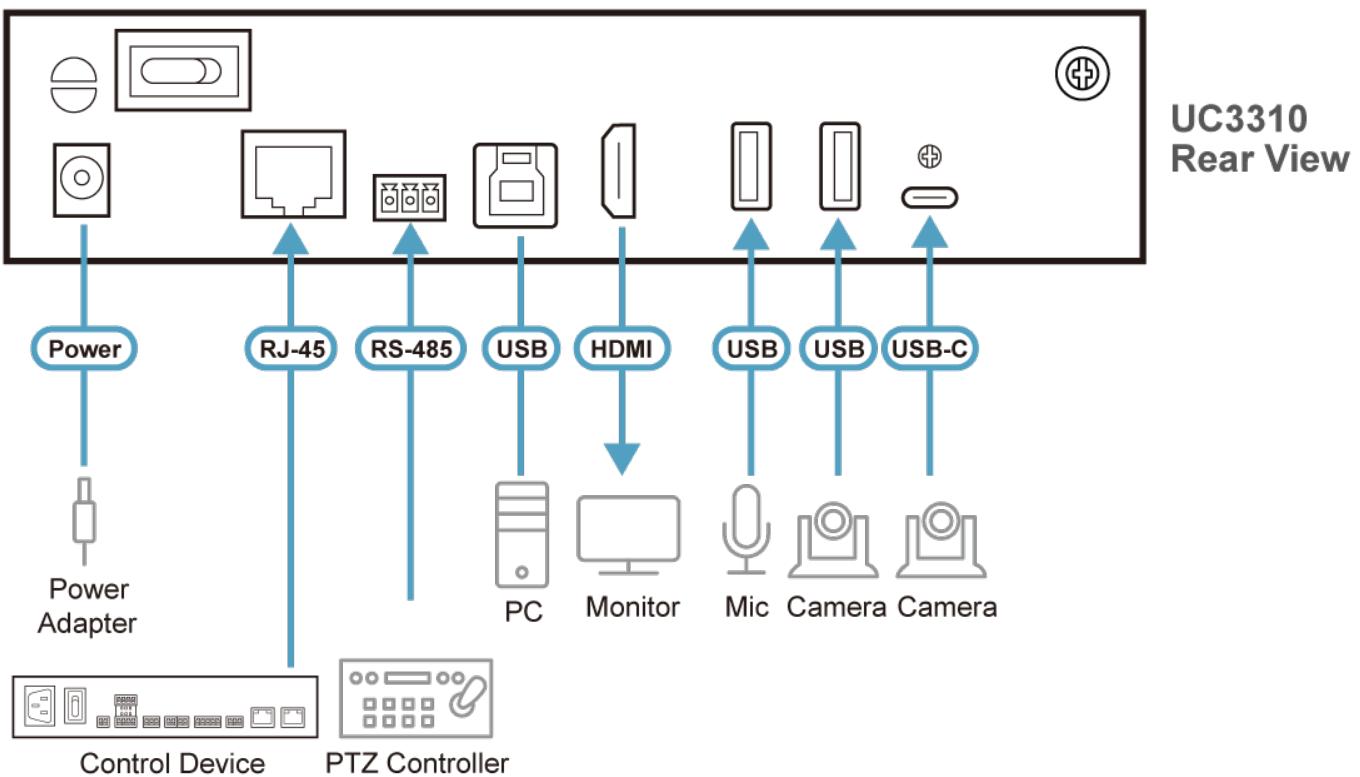
- Converts up to two 4K@30 USB camera inputs into one HDMI
- Supports USB audio in / out for matrix switching
- Support 1080p @ 30 UVC output simultaneously for live broadcasting on popular streaming software (Microsoft Teams, Zooms, OBS, XSplit, YouTube, Facebook, GoToWebinar, and Twitch)
- Pushbuttons on the front panel allow quick and intuitive signal selection and assignment
- RS-232 connection enables integration with ATEN VK Control System
- Built-in RS-485 interface to support VISCA protocol for PTZ camera controller connection
- Optional rack mount kit gives installation flexibility in media cabinets or DIT stations
- Plug-and-play convenience with no software drivers needed
- Supports all major operating systems including windows 10 and macOS 10.13

#### Specification

Connectors	
Video In	1 x USB3.2 Gen1 Type A Female (Blue) 1 x USB3.2 Gen1 Type C Female (Black)
Audio Inputs	1x USB2.0 Type A Female (White)

Video Output	1 x HDMI Type A Female (PGM Video, Black)
USB Port	USB 3.2 Gen1 Type-B Female (Blue) (USB-B to USB-A cable package included)
Video Resolution	<p>USB camera input: 720p24, 720p25, 720p30, 720p50, 720p60 1080p24, 1080p25, 1080p30, 1080p50, 1080p60 2160p24, 2160p25, 2160p30</p> <p>PGM HDMI output: HD Video Standards 720p24, 720p25, 720p30, 720p50, 720p60 1080p24, 1080p25, 1080p30, 1080p50, 1080p60 Ultra HD Video Standards 2160p24, 2160p25, 2160p30</p> <p>USB video output: 4Kp30 (MJPEG) 1080p30, 720p24, 720p25, 720p30 (MJPEG)</p>
Color Space	NV12
Audio Sampling	16-bit PCM audio, 48KHz
Control	
RS-232	<p>Interface : RJ-45</p> <p>Bit rate : 50bps~921.6Kbps (Default: 9600bps)</p> <p>Stop bit : 1 stop bit</p> <p>Data bits: 8 bits</p> <p>Parity : no parity</p> <p>Signal : TxD, RxD, GND</p>
RS-485	<p>PTZ Control Support Protocol : VISCA</p> <p>Interface : Terminal block</p> <p>Flow Control N/A</p> <p>FIFO 64 bytes</p> <p>Bit rate : 50bps~115200bps (Default: 9600bps)</p> <p>Stop bit : 1 stop bit</p> <p>Data bits: 8 bits</p> <p>Parity: none</p> <p>Signal : Data+(B), Data-(A), GND</p> <p>Protection IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV</p> <p>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m</p> <p>IEC 61000-4-4 EFT: Power1 kV Signal: 0.5 kV</p> <p>IEC 61000-4-5 Surge: Power: 1 kV</p> <p>IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m</p> <p>IEC 61000-4-8 PFMF</p>
Environmental	
Operating Temperature	0 - 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 - 80% RH, Non-Condensing
Minimum Hardware Requirements	<p>PC/Mac:</p> <p>CPU: Intel® i3 Dual Core 2.8Ghz or higher</p> <p>RAM: 4GB or more</p> <p>1 x USB-A interface</p>
OS Support	Windows 10 and above Mac OS 12 and above
Physical Properties	
Housing	Metal
Weight	0.98 kg ( 2.16 lb )
Dimensions (L x W x H)	16.46 x 20.00 x 4.40 cm (6.48 x 7.87 x 1.73 in.)
Power Inputs	
Power Adapter	DC power adapter with Power cable IEC C13, 100-240 Vac

Power Consumption	DC12V:6.50W:92BTU/h  Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

**Diagram****ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.