

## UH284

4-Port USB 2.0 Hub with Magnetic



The UH284 is ATEN's compact and highly functional 4 port USB 2.0 hub series for the desktop or the laptop. It features built-in Magnet Pads and can be placed almost anywhere. UH284 provides 4 additional USB 2.0 ports for existing USB Systems, including an easy access port which is ideal for connecting a flash drive.




### Features

- Provides 4 additional USB 2.0 ports to existing USB Systems.
- Four independent, fully functional, 480 Mbps, downstream ports.
- Fully compliant with the USB 2.0 specification.
- Supports transfer rates of 1.5 / 12 / 480 Mbps.
- Per port overcurrent protection.
- Compact design, easy to store at anywhere.
- Built in Magnet Pad for quick mount and easy movement.
- Plug-n-play.
- Available in silver, black, and burgundy.
- OS Support: Windows 2000, Windows XP, Mac and FreeBSD

## Specification

|                           |                                                                                                                                 |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Connectors                |                                                                                                                                 |
| USB Port                  | 1 x USB Mini Type B Female (Black)                                                                                              |
| Downstream                | 4 x USB Type A Female (White)                                                                                                   |
| Power                     | 1x DC Jack (Black)                                                                                                              |
| LEDs                      |                                                                                                                                 |
| Power                     | 1 (Green)                                                                                                                       |
| Output Voltage (Per Port) | +5V DC                                                                                                                          |
| Environmental             |                                                                                                                                 |
| Operating Temperature     | 0–40°C                                                                                                                          |
| Storage Temperature       | -20–60°C                                                                                                                        |
| Humidity                  | 0–80% RH, Non-condensing                                                                                                        |
| Physical Properties       |                                                                                                                                 |
| Housing                   | Plastic                                                                                                                         |
| Weight                    | 0.04 kg ( 0.09 lb )                                                                                                             |
| Dimensions (L x W x H)    | 8.30 x 3.40 x 1.47 cm<br>(3.27 x 1.34 x 0.58 in.)                                                                               |
| Note                      | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

# Diagram

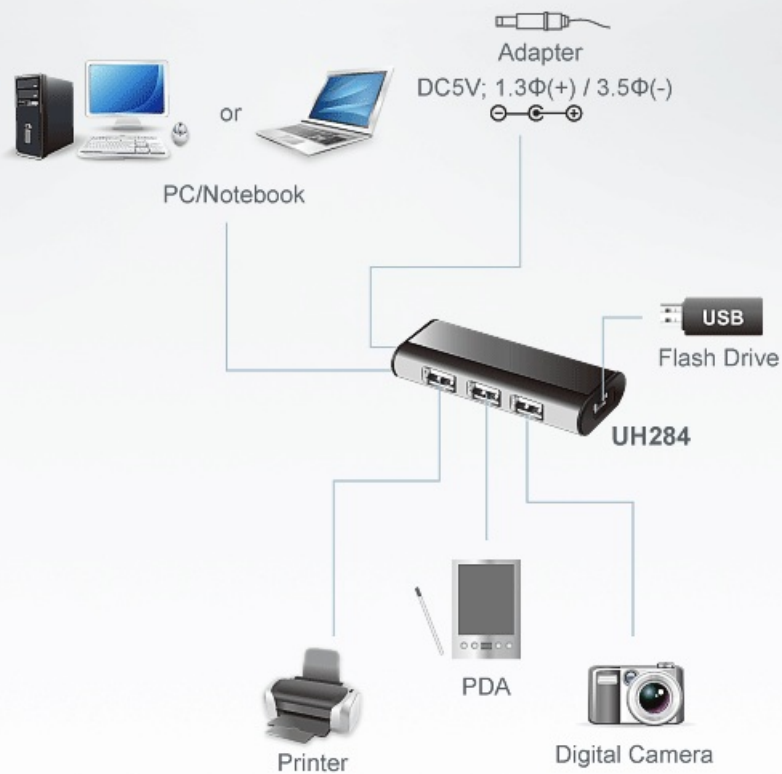

**Note:** Use of a power adapter (DC5V, 2.6 A) is optional, and requires a separate purchase.

## ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.