

CS62A

2-Port PS/2 VGA/Audio Cable KVM Switch (1.2m)



CS62A 2-Port KVM Switch has a handy design integrating with 4 feet of cables. It can control 2 servers via a single console.


Features

- One PS/2 console controls 2 computers
- Compact design, built in 1.2m cables
- All-in-one design
- With speaker support
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Bus-Powered
- OS Compatibility includes Windows 2000/XP/[Vista](#), LINUX and FreeBSD

Specifications

| | |
|------------------------|---|
| Computer Connections | 2 |
| Port Selection | Hotkey |
| Connectors | |
| Console Ports | 1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green) 1 x 3.5mm Audio Jack Female (Green) |
| KVM Ports | 2 x HDB-15 Male (Blue) 2 x 6-pin Mini-DIN Male (Purple) 2 x 6-pin Mini-DIN Male (Green) 2 x 3.5mm Audio Jack Male (Green) |
| LEDs | |
| Selected | 2 x Green |
| Cable Length | |
| Computer | 2 x 1.2 m |
| Emulation | |
| Keyboard / Mouse | PS/2 |
| Video | 2048 x 1536; DDC2B |
| Scan Interval | 3, 5, 10, 20 seconds (default: 5 secs) |
| Power Consumption | DC5V:0.22W:5BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0-50°C |
| Storage Temperature | -20-60°C |
| Humidity | 0~80% RH, Non-condensing |
| Physical Properties | |
| Housing | Plastic |
| Weight | 0.30 kg (0.66 lb) |
| Dimensions (L x W x H) | 8.40 x 5.40 x 3.00 cm (3.31 x 2.13 x 1.18 in.) |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

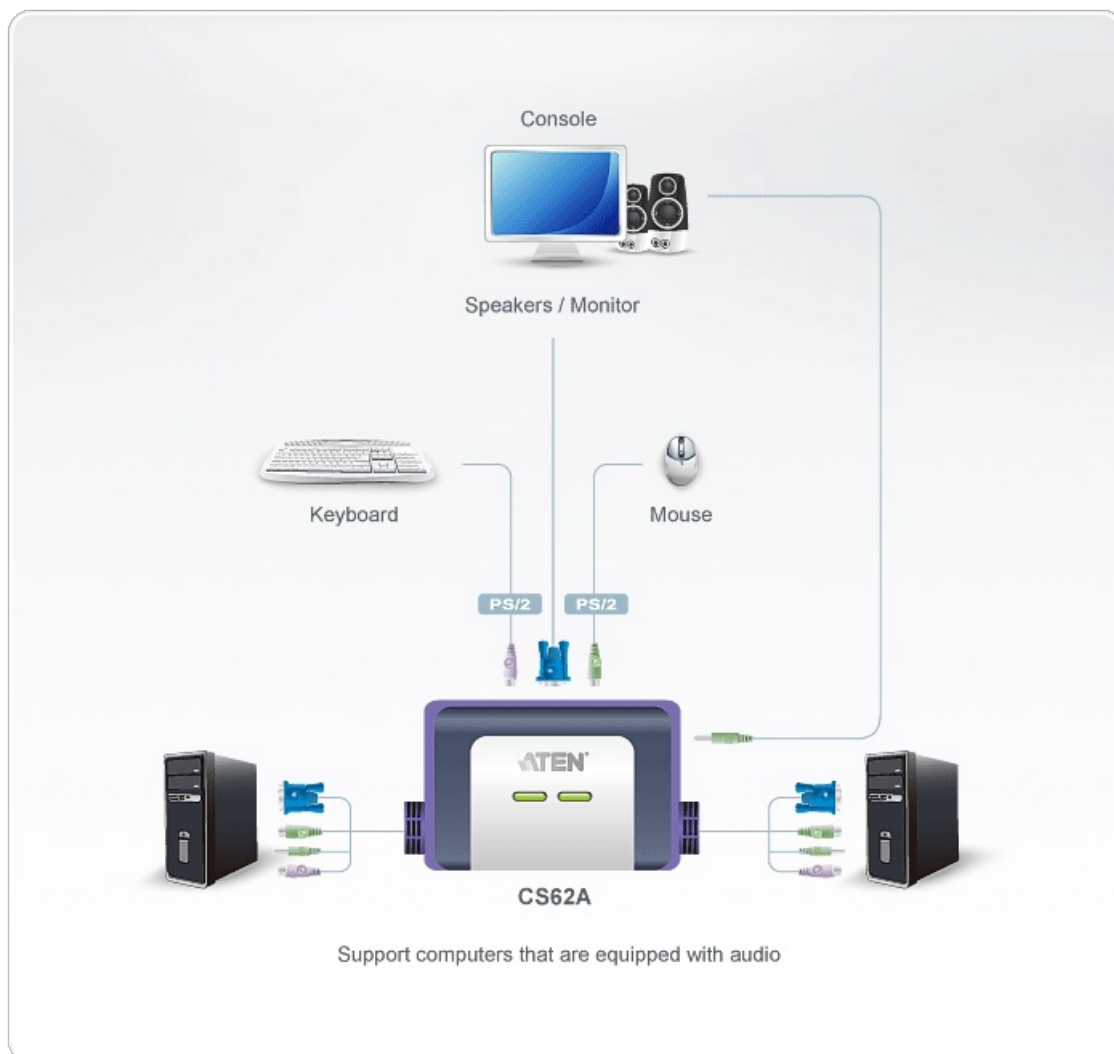

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.