


## KA9520

PS/2 VGA KVM Adapter

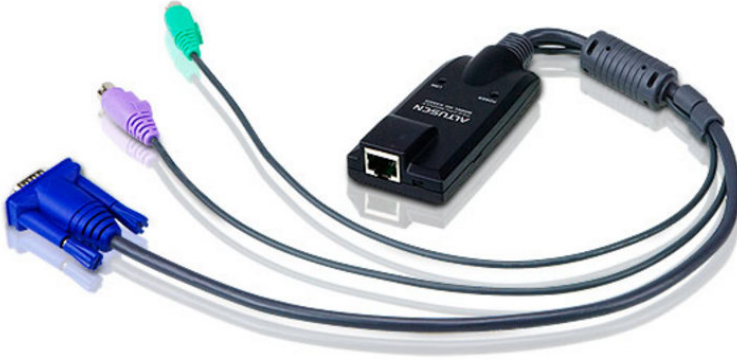

The Altusen PS/2 CPU adapters connect KVM cables to the PS/2 console ports of the servers. Those adapters are light and in small form factor, fit perfectly into most of the rack-mount or desktop servers.

### Features

- Auto Signal Compensation (ASC), no DIP switch setting needed for the different distances.
- Hot pluggable - add or remove computers without having to power down the switch.
- Lifetime firmware upgrades.
- Superior video quality - supports resolution of up to 1280 x 1024 within the distance of up to 40m (130'); DDC2B.
- Built in ASIC for greater reliability and compatibility.
- CPU module designed with automatic conversion to allow for flexible interface combinations (PS/2, USB) to control all computer types (PC).
- Compact size

**Note:** Not Compatible with Matrix KVM Switch [KM0832/KM0432/KM0216](#).

## Specifications

Connectors	
Link	1 x RJ-45 Female
Computers	2 x Min Din 6 Male 1 x HDB-15 Male
LEDs	
Online	1 (Green)
Link	1 (Orange)
Physical Properties	
Housing	Plastic
Weight	0.14 kg ( 0.31 lb )
Dimensions (L x W x H)	9.00 x 4.30 x 2.18 cm (3.54 x 1.69 x 0.86 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

## Diagram



### **ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.