

## VB905

True 4K DisplayPort Booster



ATEN VB905 extends True 4K signal from a source device to a display up to 5 meters. For long distance transmission, the VB905 can be cascaded up to 3 levels (20 meters), guaranteeing ultimate color and image quality.

The VB905 supports all DisplayPort enabled devices. For installation flexibility, the booster can be rack mounted, offering excellent flexibility for managing both work and home settings.



### Features


- Extends True 4K signal transmission up to 5 m
- Compliant with DisplayPort 1.2a and HDCP 2.2
- Superior video quality – up to True 4K resolutions of 4096 x 2160 @ 60 Hz (4:4:4)
- Supports HDR
- Cascade 3 levels to extend True 4K signal up to 20 m
- A single unit can be powered from the source device
- Plug-and-play
- Rack mountable

Note: Longer transmission distance is possible with lower data rates. If you want to remain high quality transmission, please use higher quality cable.

## Specifications

Video Input	
Interfaces	1 x DisplayPort Female (20-pin)
Max. Distance	Up to 4Kx2K@60Hz (4:4:4) / 5m 1080p@60Hz / 5m
Video Output	
Interfaces	1 x DisplayPort Female (20-pin)
Max. Distance	Up to 4Kx2K@60Hz (4:4:4) / 5m 1080p@60Hz / 5m
Video	
Max. Data Rate	21.6 Gbps (5.4 Gbps Per Lane)
Compliance	DP1.2a HDCP 2.2
Max. Resolution	4096 x 2160@60Hz (4:4:4)
Connectors	
Power	1 x DC Jack
Power Consumption	DC5V:0.937W:4BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.05 kg ( 0.11 lb )
Dimensions (L x W x H)	5.84 x 3.53 x 2.06 cm (2.3 x 1.39 x 0.81 in.)
Carton Lot	10 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

## Diagram

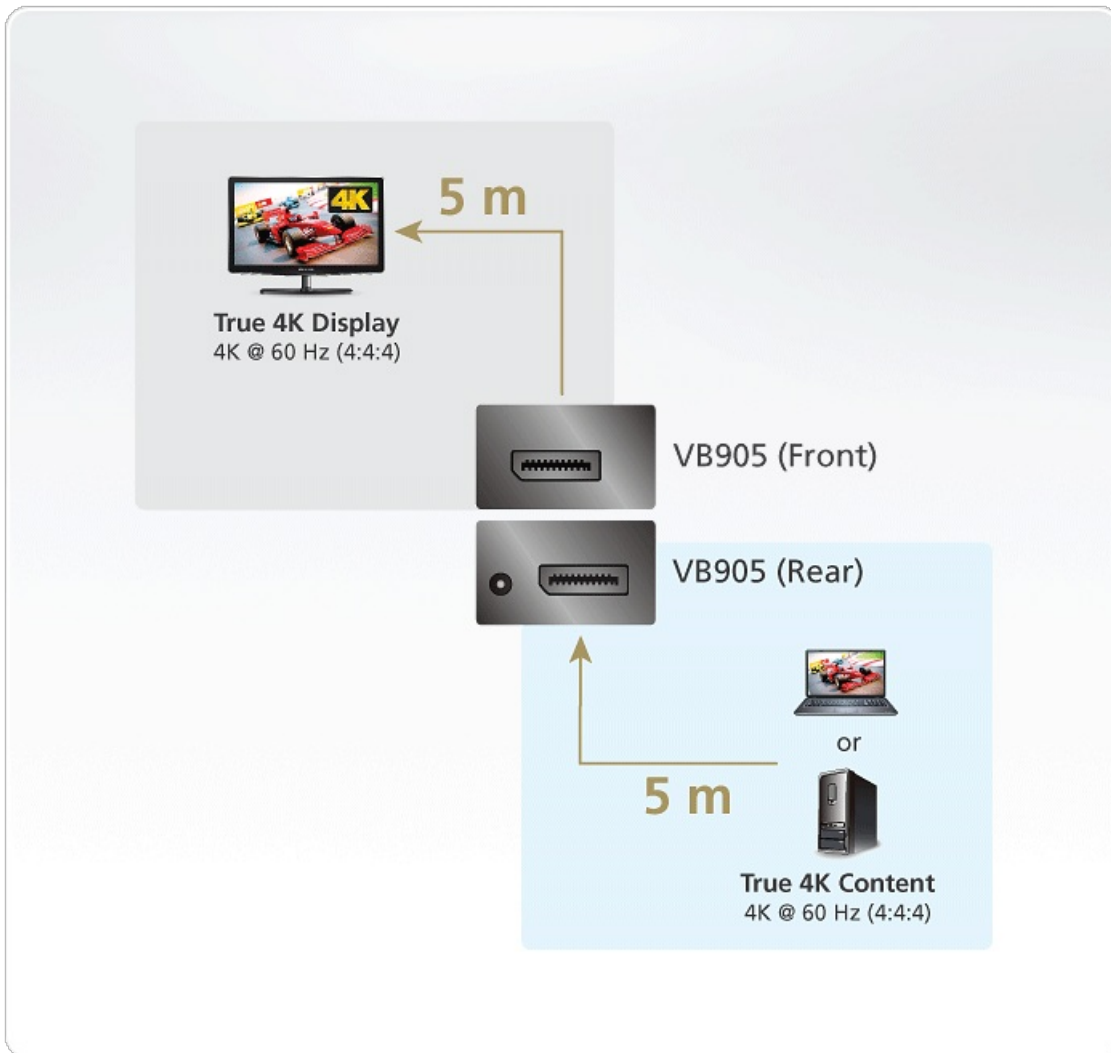

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.