

UC232B

USB to RJ-45 (RS-232) Console Adapter (1.2 m)



The ATEN UC232B is a one port USB-to-Serial console adapter. This high quality industrial adapter cable is designed to instantly add single RS-232 console port connectivity for networking appliances via a USB port. The adapter is powered via the USB connection.

The UC232B is compatible with the USB 2.0 standard and works conveniently with desktop and notebook PCs. It also can be used with large integrated computer-based systems or other specialized applications, such as point-of-sale applications, networking equipment, industrial automation systems, and native serial transfer instruments to offer a convenient connectivity solution. The UC232B converter provides a plug & play solution. Windows, Mac and Linux drivers are included.

NOTICE


If your Linux kernel is between v2.6.15 ~ v5.4 and your device has a new chipset version, please update the Linux driver

Note: This driver works with 2021 or later chipset version device only.

Use the link below to identify which chipset version your device is

<https://eservice.aten.com/eServiceCx/Common/FAQ/view.do?id=18695>

Product Comparison

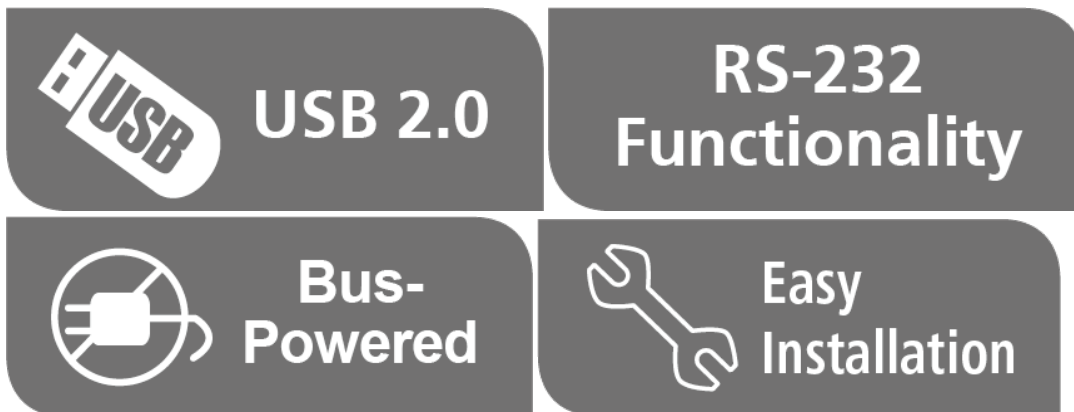


Features

- Converts a USB port to RJ-45 Console port (RS-232)
- Supports straight RJ45 cable, no need to use Rolled RJ45 Cable for connecting Networking Router, modem or network switch for configuration
- Fast COM Port Transmission – up to 921.6 Kbps data transfer rate
- COM retention saves the assigned port settings for the device
- Proven performance in anti-electromagnetic interference (anti-EMI) capability for stable transmission performance
- OS Compatibility: Windows, Mac, and Linux
- Plug-and-Play – Small and lightweight enclosure makes it a perfect travel companion
- No external power supply needed
- A trustworthy connectivity solution recommended and adopted by leading enterprises worldwide

Specifications

| | |
|------------------------|---|
| Connectors | |
| USB Port | 1 x USB Type A Male (White) |
| Serial | 1 x RJ-45 Female (Silver) |
| Data Rate | Up to 921.6Kbps |
| Cable Length | 1.2m |
| LEDs | Power Status |
| Power Mode | Bus Powered |
| USB Specification | USB compliant |
| Environmental | |
| Operating Temperature | 0–40°C |
| Storage Temperature | -20–60°C |
| Humidity | 0–80% RH, Non-condensing |
| Physical Properties | |
| Housing | Plastic |
| Weight | 0.06 kg (0.13 lb) |
| Dimensions (L x W x H) | 2.56 x 5.84 x 2.23 cm (1.01 x 2.3 x 0.88 in.) |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

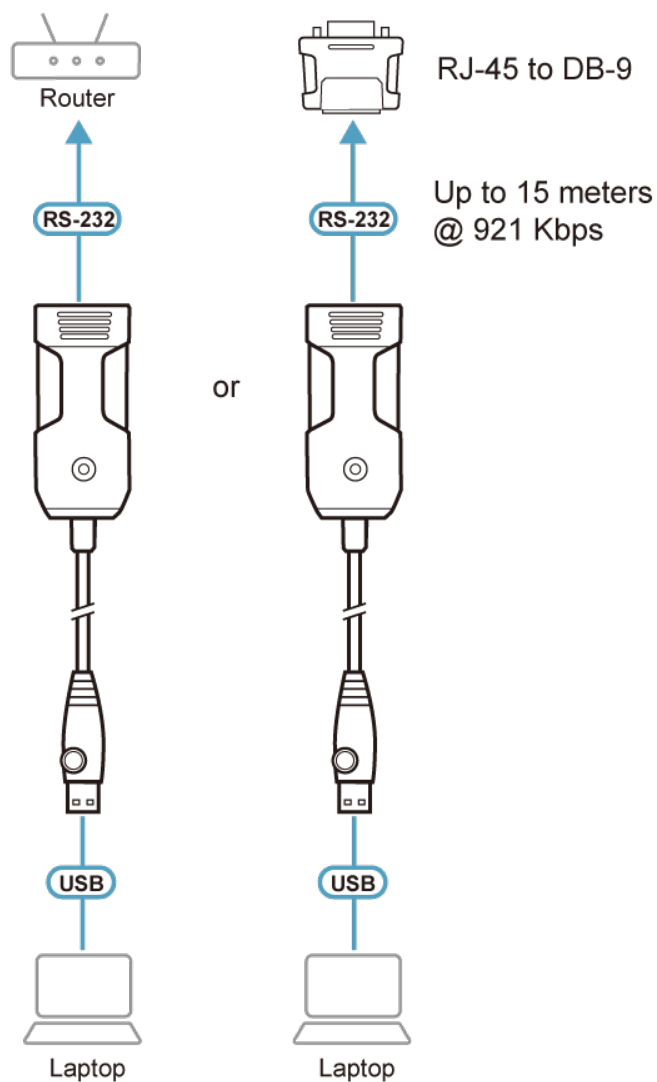

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.