


IC-104SA

RS-232 4 Port PCI card with Re-Map



RS232 converters and extenders are heavily represented in many enterprise fields. • The telecommunication industry • Auto-teller machines • Airport check-in and flight schedule display systems • Automatic postal machines • Power and energy distribution monitoring and control systems • Highway tunnel monitoring and traffic lights • Building automation from remote image transmission to elevator control.

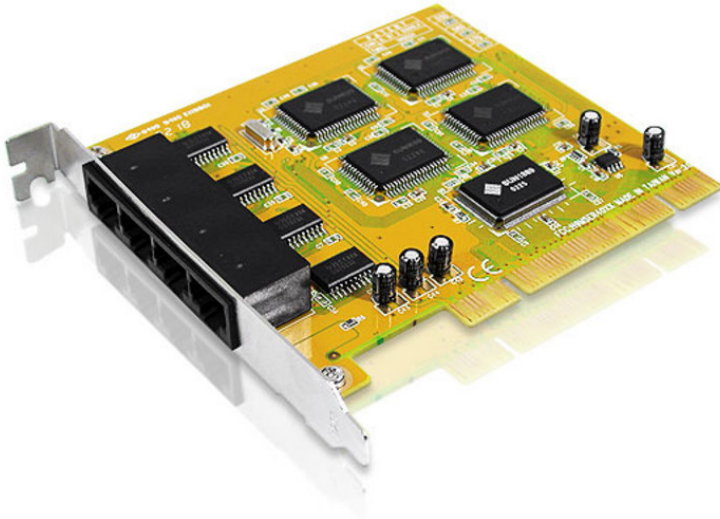

Features

- Fully compliable with PCI Spec. Ver2.2 standard.
- Supports both 64-bit & 32-bit PCI Bus and 3.3V & 5V connector keys.
- High speed serial port support baud rates up to 921.6Kbps.
- High-tech 128K FIFO can reduce CPU loading, interrupting and improving system performance dramatically.
- Plug and Play, I/O address and IRQ assigned by BIOS.
- Works with various type of DB9M / DB25M serial devices.
- Assign serial ports Re-Map to ISA address 3F8, 3E8, 2F8, 2E8 under DOS, NT operation system for special devices working on COM1 and COM2.
- Ready for the Intel® Itanium® and AMD® Athlon® 64R 64-bit CPU on the Microsoft Windows® XP 64-bit Edition Version 2003 and Windows® Sever 2003 for 64-bit Itanium-based or Extended Systems.
- Ideal for 56K V.90 external modems and ISDN terminal adapters, PDA, UPS, barcode scanner and other high-speed serial port devices.
- OS Support: Windows 2000, Windows XP and Linux

Specification

RS-232 4 Port PCI card

Mode of Operation	Hand-shaking Mode
Bus Transceivers	RS-232 Full-duplex
Drivers per Line	RS-232 1 Driver
Receivers per Line	RS-232 1 Receiver

Hardware	
Controller	UART (16C650 compatible)
Bus Interface	64-bit & 32-bit PCI Bus - 3.3V & 5V Connector Keys
Connector	4 RJ-45 to 4 DB9 Male or DB25 Male
Communication	
IRQ & I/O Address	Assigned by BIOS
Re-Map	Re-Map to ISA address 3F8, 3E8, 2F8, 2E8
FIFO	32 bytes hardware FIFO, 128 Kbytes software FIFO
Baud Rate	75bps ~921.6Kbps
Data Bit	4, 5, 6, 7, 8
Stop Bit	1, 1.5, 2
Parity	even, odd, none, mark, space
Flow Control	None, Xon/Xoff, Hardware
Signals	DCD, RxD, TxD, DTR, GND, DSR, RTS, CTS
Driver Supported	
64-bit System	Intel Itanium and AMD Athlon64 CPU
Microsoft	DOS, Windows 3.x /9x / ME / NT / 2000 / XP / 2003
Linux	2.0.x / 2.2.x / 2.4.18 / 2.4.20
DOS	DOS
Environmental	
Operating Temperature	0–57°C
Storage Temperature	-20–85°C
Humidity	5 ~ 95% RH
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.