

## VS132A

2-Port VGA Splitter (450MHz)



The VS132A Video Splitter is a boosting device that duplicates a video signal from one source to 2 output devices. Cascadable to three levels, the VS132A provides up to 8 video signals, in addition to extending transmission distance up to 98.5 feet (30 m), making it excellent for public broadcast systems.

To transmit multiple, high-quality VGA, XGA, SVGA, UXGA, QXGA, WUXGA and multisync video signals over long distance without hassle, the VS132A is your best choice.

Applications include:

- Financial - the remote display of stock market information
- Education - the remote display of lectures and lessons to halls and classrooms
- Business - the remote display of addresses to overflow rooms; video conferencing; and demos


### Features

- One video input to 2 video outputs
- Supports up to 450 MHz bandwidth
- Cascadable to 3 levels - provides up to 8 video signals
- Long distance transmission - up to 30m \*
- Superior video quality - up to 2048 x 1536
- Supports VGA, XGA, SVGA, UXGA, QXGA, WUXGA and multisync monitors
- Built-in 1.5 GHz amplifier to ensure video system maintain excellent fidelity
- All-metal casing

**Specification**

Video Input	
Interfaces	1 x HDB-15 Male (Blue)
Impedance	75 $\Omega$
Max. Distance	1.8 m
Video Output	
Interfaces	2 x HDB-15 Female (Blue)
Impedance	75 $\Omega$
Video	
Max. Bandwidth	450 MHz
Max. Resolution	Up to 2048 x 1536
Max. Distance	Up to 30 m
Connectors	
Power	1 x DC Jack
Power Consumption	DC5V:0.62W:3BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.42 kg ( 0.93 lb )
Dimensions (L x W x H)	13.00 x 7.51 x 4.40 cm (5.12 x 2.96 x 1.73 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

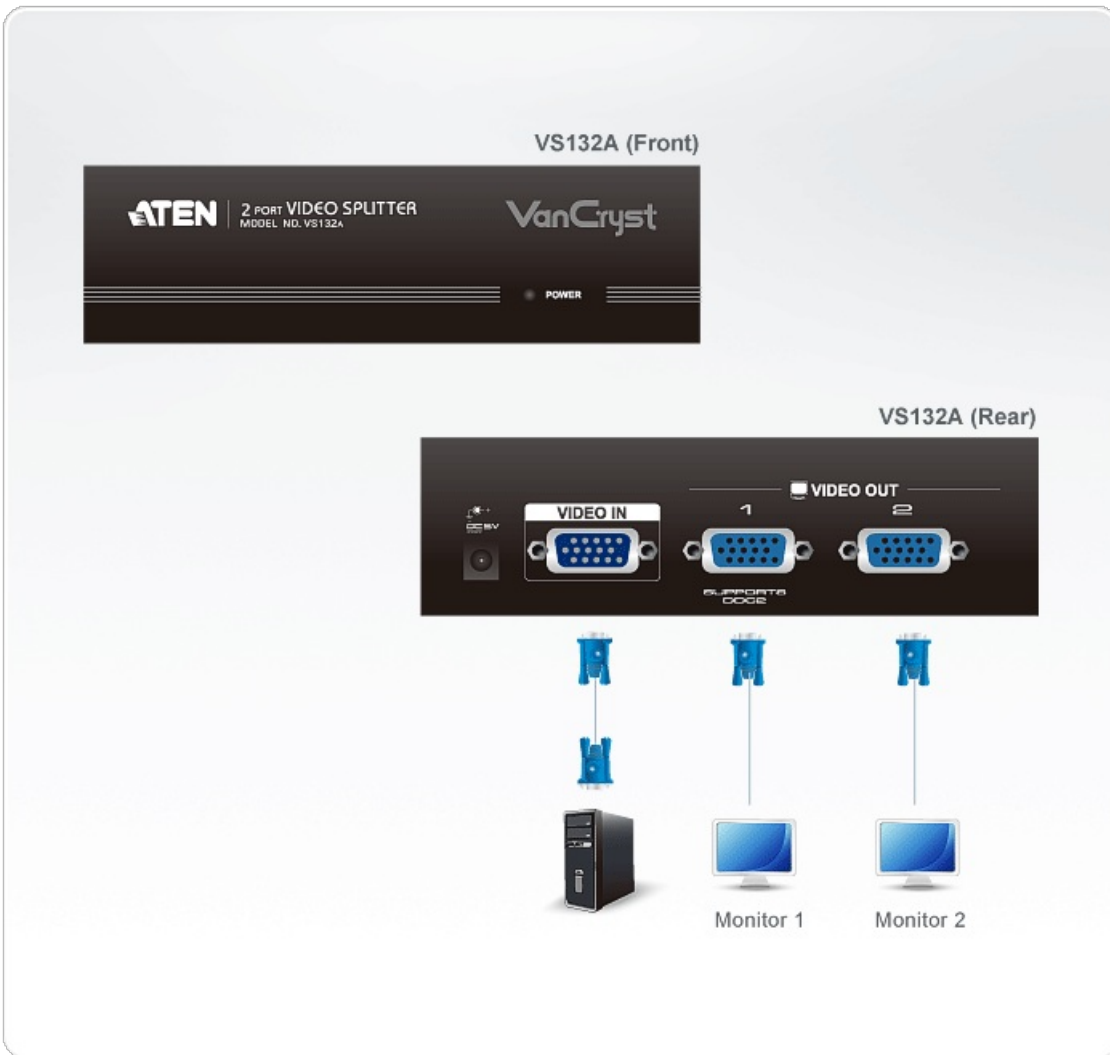

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.