

VE500T

VGA/Audio/RS-232 Cat 5 Transmitter with Auto Compensation (1280 x 1024@300m (RQ))



The VE500T A/V Over Cat 5 Transmitter is exclusively designed to integrate seamlessly with the ATEN [VM0808T/VM1616T](#) Matrix Switch to extend signals up to 300m from the source to the switch using Cat 5e cables. The [VE300](#) is ideal for installations such as construction sites, factory floors, and control and security centers – where the system equipment can reside in a safe and secure location, while the display is conveniently located in public view.


Features

- Long Distance Transmission up to 300 m
- Superior audio quality - balanced audio provides flawless long-distance transmission
- Provides RS-232 channel
- Supports wide screen
- Rack Mountable

Specifications

| | |
|------------------------|---|
| Video Input | |
| Interfaces | 1 x HDB-15 Male (Blue) |
| Impedance | 75 Ω |
| Video Output | |
| Interfaces | 1 x HDB-15 Female (Blue) |
| Impedance | 75 Ω |
| Video | |
| Max. Bandwidth | 300 MHz |
| Audio | |
| Input | Balanced: 1 x Captive Screw Connector, 5 pole (Green) Stereo: 1 x Mini Stereo Jack Female (Green) |
| Control | |
| RS-232 | Connector: 1 x DB-9 Female (Black) Serial Control Pin Configurations: Pin 2 = Rx, Pin 3 = Tx, Pin 5 = Gnd |
| Connectors | |
| Power | 1 x DC Jack (Black) |
| Power Consumption | DC5.3V:2.2W:10BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0-50°C |
| Storage Temperature | -20 - 60°C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 0.48 kg (1.06 lb) |
| Dimensions (L x W x H) | 20.20 x 8.64 x 2.50 cm (7.95 x 3.4 x 0.98 in.) |
| Carton Lot | 5 pcs |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

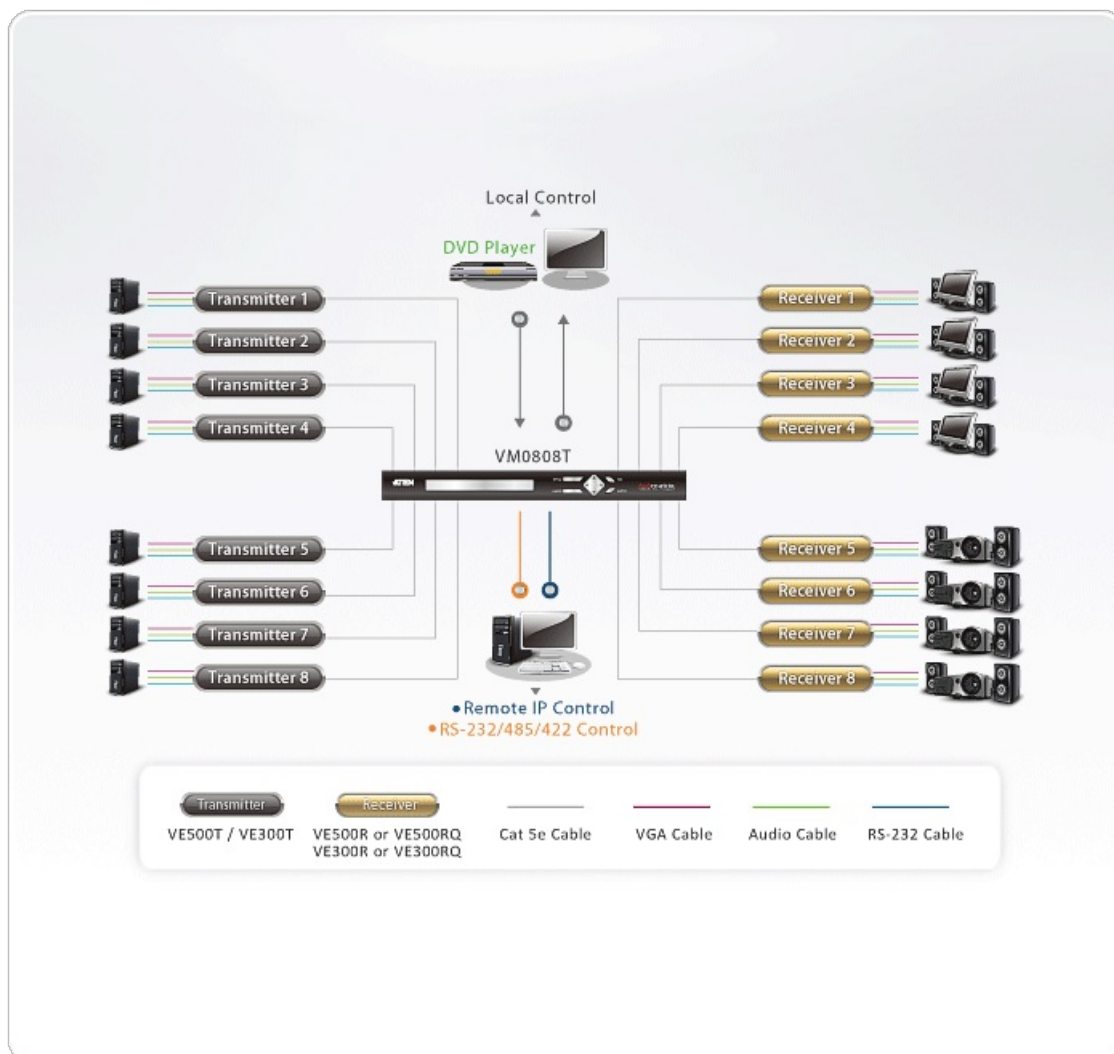

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.