

VB802

HDMI Cat 5 Repeater (1080p@40m)



The VB802 HDMI Over Cat 5 Repeater is an HDMI signal extension device which is compatible with ATEN HDMI Over Cat 5 Splitters or Extender. The VB802 extends the transmission range an extra 60m over two Cat 5e cables.

The use of an additional repeater means the HDMI signals can be transmitted over even longer distances. By using up to 4 x VB802 and 1 x <u>VE800</u>R in one installation, signals can be transmitted over longer distances (up to 300m).



Features

- Uses two Cat 5e cables to extend HDMI signal
- Long distance transmission up to 60 m
- Provides the quickest and most efficient way to move multimedia content from Transmitter to Receiver
- · Offers local HDMI output
- HDMI and HDCP compatible
- HDMI (3D)
- Supports Dolby True HD and DTS HD Master Audio
- 8-level EQ adjustment to improve image quality
- Cascadable to five levels*
- Superior video quality HDTV resolutions of 480p, 720p, 1080i and 1080p (1920 x 1080)
 - * Signal quality depends on cables. We recommend STP Cat 5e/6 cables or ATEN low skew cable (Part No. <u>2L-2801</u>)




Specification

| Video Output | |
|--------------------------------|--|
| Interfaces | 1 x HDMI Type A Female (Black) 2 x RJ-45 Female |
| Impedance | 100 Ω |
| Video | |
| Max. Data Rate | 6.75 Gbps (2.25 Gbps Per Lane) |
| Max. Bandwidth | 225 MHz |
| Compliance | HDMI (3D, Deep Color) HDCP Compatible |
| Max. Resolutions / Distance | Up to 1080p@40m; 1080i@60m |
| Audio Outputs | |
| Interfaces | 1 x HDMI Type A Female (Black) |
| Connectors | |
| Power | 1 x DC Jack (Black) |
| Power Consumption | DC5V:12.28W:58BTU/h |
| | Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0 - 50°C |
| Storage Temperature | -20 - 60°C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 0.25 kg (0.55 lb) |
| Dimensions (L x W x H) | 12.30 x 9.04 x 2.26 cm (4.84 x 3.56 x 0.89 in.) |
| Carton Lot | 20 pcs |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |



Diagram

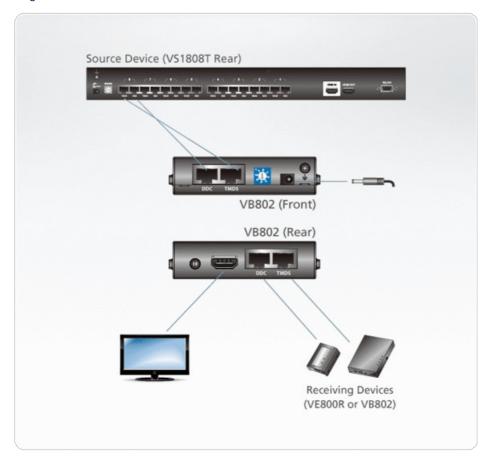

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.