

AF241

ParaHub



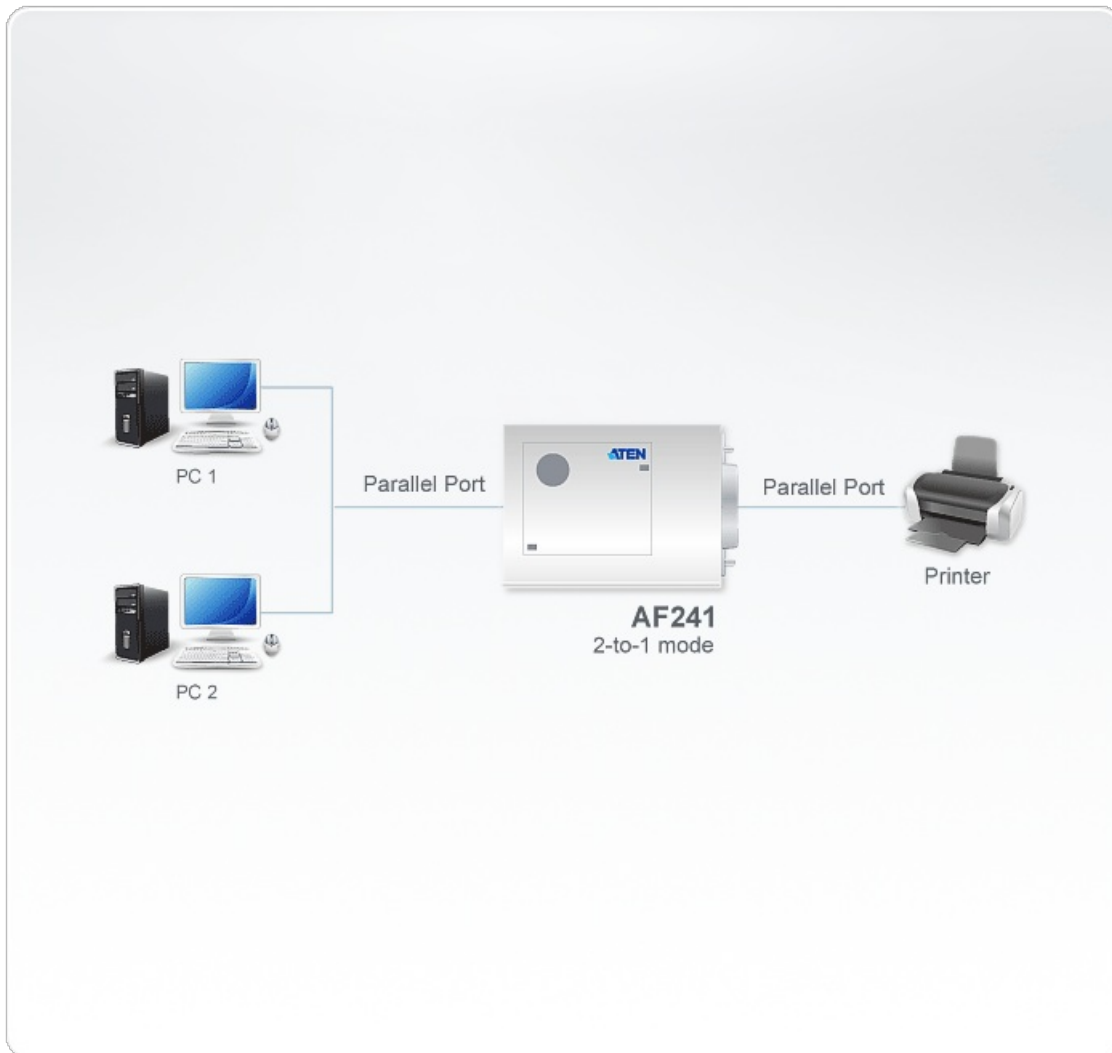
AF241 is a FIFO data switch using the 2 to 1 operation mode (i.e. 2 PCs to 1 printer) and allows users to transfer files to other PCs without additional cable connections.

Features

- Shares peripherals between computers.
- Transfers files between computers.
- Supports IEEE-1284 nibble mode.
- Print job management is first come, first serve.
- Selects ports by button and software code operation.
- Non-Powered operation.
- HP Laser Jet, Canon, Epson and NEC Compatible.
- OS Support: Windows 2000, Windows XP

Specification

Connectors	3 x DB-25 Female
LEDs	
Printer Activity	2 (Red)
Port Selection	
Input	Auto / Manual PC Selection
Output	N/A
Input Arbitration	First Come First Served
File Transfer	Yes
Broadcast	No
Timeout Selection	15, 45 Seconds
Power Consumption	DC 9V, 0.9W (Max.) Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Signal Range	6 m (Max)
Environmental	
Operating Temperature	0 ~50°C
Storage Temperature	-20 ~ 60°C
Humidity	0~80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.11 kg (0.24 lb)
Dimensions (L x W x H)	9.30 x 7.70 x 2.55 cm (3.66 x 3.03 x 1 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.